

Welcome to the HT Enthusiast Extended Workflow

v18.2.0

Featuring ...

- ▶ Home layout outlines the workflow structure with full access
- ▶ Comprehensive Notes Management - access button always at bottom right
- ▶ Integrated Session Setup layout with hardware configuration and dynamic range assessment, with access to Meter Profile Analysis, Meter Stability, and Screen Uniformity layouts
- ▶ Single layout takes all desired Pre- or Post-calibration readings
- ▶ Expanded Multi-Point Grayscale calibration, pre/post-cal charts, and datagrid layouts
- ▶ CMS Gamut detailed calibration layout
- ▶ Saturation Sweep detailed calibration, pre/post-cal charts, and datagrid layouts
- ▶ 3D Color Cube LUT calibration, detailed charts, and datagrid layouts
- ▶ Gamut Luminance & Color Check cal assessment, pre/post-cal charts and datagrid layouts
- ▶ High-count calibration points, HDR friendly with EOTF charts
- ▶ DeltaE is **I_{CtCp} 720: Compensated** is default, **With Luminance Error** if indicated or after the "/"
- ▶ Layout indicators: Calibration Charts Datagrids


Home

Session Setup


Also featuring navigation for the Mouse Lazy ...

- ▶ Navigation bar on left shows where you are and takes you where you want to go
- ▶ Toggle buttons switch between complementary layouts with one click:
 - between the Calibration layouts and their corresponding Datagrid
 - between the Pre-Calibration Readings and Post-Calibration Readings
 - between corresponding Pre-Calibration and Post-Calibration Details
 - between corresponding Post-Calibration Details and Datagrids

And more!

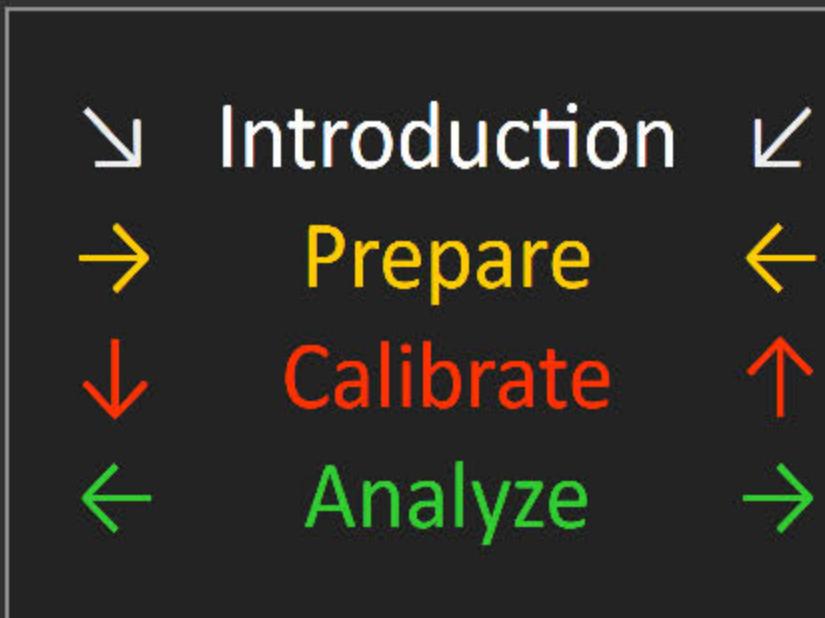

CalMAN HDR10

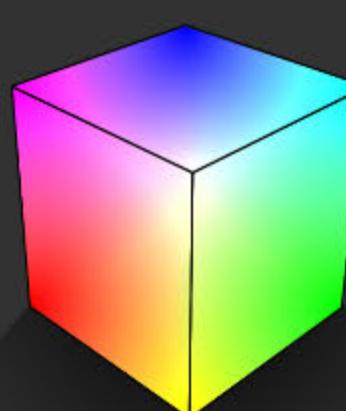

CalMAN - **Workflow Overview**

WORKFLOW OVERVIEW

The HT Enthusiast Extended Workflow aims at providing all the possible calibration options in an accessible user-friendly manner.

The workflow is divided into four sections or zones with a corresponding color for the three working zones.

- 1) ► **Introduction:** Provides general information about the workflow and its features, and random access to all layouts
- 2) ► **Preparation Zone:** Enter session and device setup information, take pre-calibration readings for reference, plan the dynamic aspects of the session (contrast, brightness, etc.)
- 3) ► **Calibration Zone:** Contains the calibration layouts with matching datagrids, and the post-calibration readings layout for all views except the 2-Point Grayscale and 3D Color Cube LUT
- 4) ► **Analysis Zone:** Has detailed charts and datagrids for all views in the pre- and post-calibration states (except the 3D Color Cube LUT which feeds off the calibration layout) and a final check layout for dynamic range fine-tuning with a session summary

ACTIVE CALIBRATION VIEWS

- 2-Point Grayscale
- Multi-point Grayscale
- Saturation Sweeps, also used for basic CMS calibration
- Gamut Luminance
- Color Checker with option for Slim Datagrid
- 3D Color Cube LUT with tabs for Full-feature and Minimal
- Use Minimal layout tab where available for hopefully faster AutoCal.
- DeltaE is ICtCp 720, compensated by default, and with luminance error where indicated or after the "/".
- All active calibration layouts except 2-Point have full-screen datagrids.
- Use the Slim high-content Color Checker datagrid for faster processing of hundreds of colors.

ANALYSIS CHARTS

Except the 2-Point Grayscale and 3D Color Cube LUT, there are pre-calibration and post-calibration detail chart layouts for each active calibration view.

You can toggle between them by clicking the ↑ PreCal or ↑ PstCal button in the Nav Bar (they super-impose when the layout switches so just keep clicking to go back and forth). Other ↑ buttons in the Nav Bar perform similar toggling duties.

Unlike in the other color views, the CIE chart in the Color Checker pre- and post-calibration chart layouts is a display option accessible by checking the CIE Chart option.

Supplementing the charts are analysis datagrid layouts with both pre- and post-calibration data for each active calibration view. You can access them using the #Datagrid buttons.

KEY LAYOUTS

Home - has a layout map for getting the lay of the land and a fully loaded navigation matrix for access to all layouts.

Notes Management - Comprehensive notes management layout contains all notes for convenient editing, with access button at bottom right of all layouts.

Session Setup - Integrates calibration options, initial settings & notes, and hardware/device configuration.

Pre-Calibration Readings, Post-Calibration Readings - these identically configured layouts are master controls for the pre- and post-calibration states with combined and selective reading of all views. They feed all the detail charts and datagrids. You can toggle between the pre- and post-cal reading layouts, and between a reading layout and its corresponding detail layouts, in the Nav Bar (↑ PreCal and ↑ PstCal) and the explicit toolbar buttons.

Final Check - Analyzes and fine-tunes the dynamic range aspect and provides a comprehensive calibration summary.

Show Outline

NAVIGATION BAR

Displays the normal layout sequence with instant access across views and zones

Current Layout Context
Next / Back in workflow sequence and / or buttons for navigation to related layouts

Meter Stability **Screen Uniformity**

MtStb **MtPrfl** **ScUni** ← context navigation →

Meter Profile Analysis

Red arrow indicates position in workflow

Normal workflow sequence

Calibrate

Multi-Point and 2-Point → ↑ Gry
↑ CMS
↑ Sat

Full & Minimal → ↑ LUT
↑ Lum
↑ CCK
PostCal Read

Analysis Nav Bar and Next / Back buttons follow
current view:
Individual
Pre-Cal or
Post-Cal charts,
or combined
Pre- & Post-Cal
Datagrids

Datagrids **Pre-Cal & Post-Cal Charts** → Analyze
Gry
Sat
Lum
CCK

← context navigation →

Charts from Full & Minimal calibration → ↓ LUT
↓ Lum
↓ CCK
Final Check

Layout indicators: **↑ Calibration** **↓ Charts** **# Datagrids**

Nav Bar **INT**
Home
 « Back
 Next »
 Intro
 HOME
 Prepare
 Session Setup
 PreCal Read
 Calibrate
 Multi-Point and 2-Point → ↑ Gry
 ↑ CMS
 ↑ Sat
 Full & Minimal → ↑ LUT
 ↑ Lum
 ↑ CCK
 PostCal Read
 Analysis Nav Bar and Next / Back buttons follow
 current view:
 Individual
 Pre-Cal or
 Post-Cal charts,
 or combined
 Pre- & Post-Cal
 Datagrids
 Datagrids Pre-Cal & Post-Cal Charts → Analyze
 # Gry
 # Sat
 # Lum
 # CCK
 ← context navigation →
 Charts from Full & Minimal calibration → ↓ LUT
 ↓ Lum
 ↓ CCK
 Final Check

Return

Navigation Bar → ←

CaIMAN

Workflow Description +

Show Outline

Preparation (PRP)

- Session Setup → Screen Uniformity → Meter Profile Analysis → Meter Stability
- Pre-Calibration Readings

Calibration (CAL)

- 2-Point Grayscale Calibration
- Multi-Pt Grayscale Calibration → Datagrid
- CMS Gamut Calibration → Datagrid
- Saturation Sweeps Calibration → Datagrid
- 3D Color Cube LUT Calibration
- Gamut Luminance Calibration Assessment → Datagrid
- Color Checker Calibration Assessment → Datagrid (normal & slim versions)
- Post-Calibration Readings

Analysis (ANL)

- Multi-Pt Grayscale Post-Cal Charts → Pre-Cal Charts → Datagrids
- Saturation Sweeps Post-Cal Charts → Pre-Cal Charts → Datagrids
- Gamut Luminance Post-Cal Charts → Pre-Cal Charts → Datagrids
- Color Checker Post-Cal Charts → Pre-Cal Charts → Datagrids
- 3D Color Cube LUT Calibration Detail Charts (from Full & Minimal calibrations)
- Final Check + Summary – Fine Tune the Dynamic Range

NAVIGATION BAR

Displays the normal layout sequence with instant access across views and zones

Current Layout Context

Next / Back in workflow sequence and / or buttons for navigation to related layouts

Red arrow indicates position in workflow

Meter Stability Screen Uniformity
 MtStb MtPrfl ScUni ← context navigation →
 Meter Profile Analysis



Normal workflow sequence

Multi-Point and 2-Point → ↓ Gry
 ↓ CMS
 ↓ Sat
 Full & Minimal → ↓ LUT
 ↓ Lum
 ↓ CCK
 PostCal Read
 ↓ Gry
 ↓ Sat
 ↓ Lum
 ↓ CCK
 Charts from Full & Minimal calibration → ↓ LUT
 Final Check

Analysis Nav Bar and Next / Back buttons follow current view:
 Individual Pre-Cal or Post-Cal charts, or combined Pre- & Post-Cal Datagrids

Datagrids Pre-Cal & Post-Cal Charts → Analyze
 # Gry ↓ Gry
 # Sat ↓ Sat
 # Lum ↓ Lum
 # CCK ↓ CCK
 ← context navigation →

Navigation Bar → ←

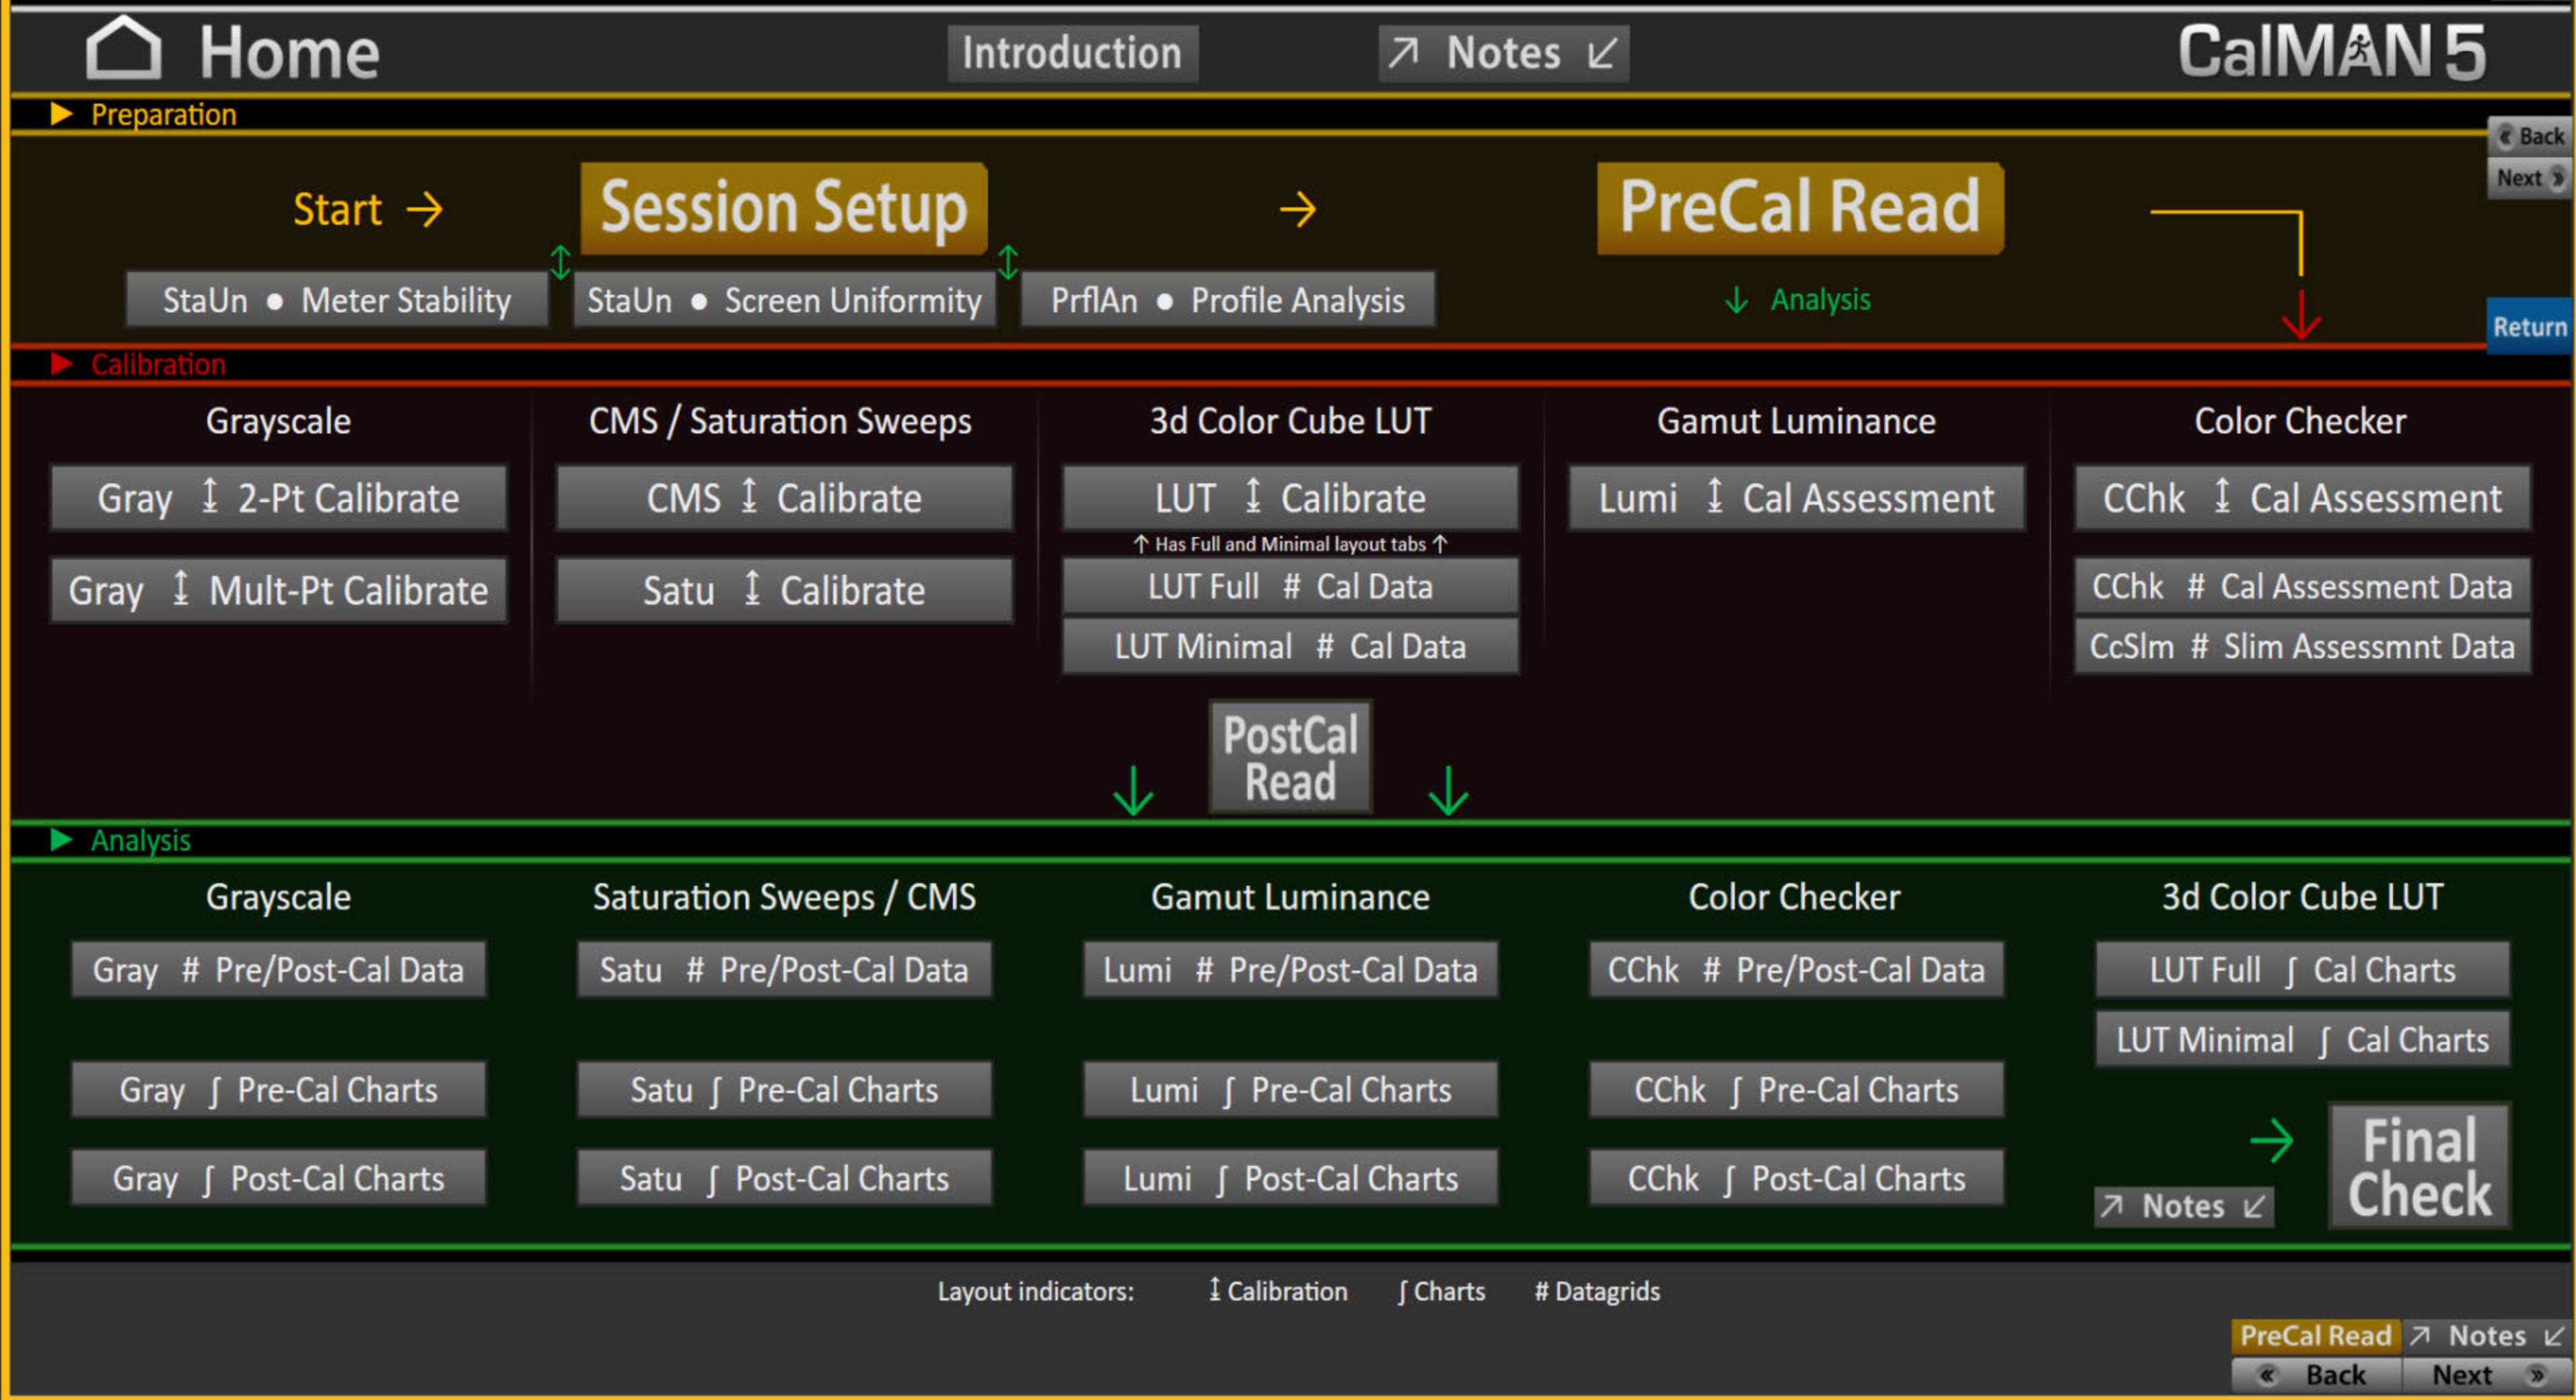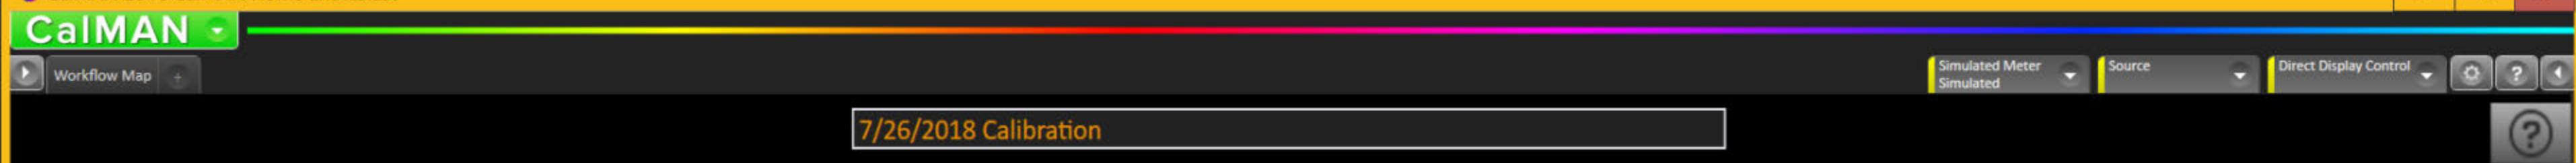

CaIMAN

Notes Management

Simulated Meter
Simulated

Source

Direct Display Control



Setup Notes

Calibration Notes

Return

Pre-Calibration Notes



REF

Notes

Calibration Description / Goals

Color Notes

Post-Calibration Notes

Return

Session Setup 10/29/2018 Calibration

(A) Session Options

- Start New Session
- Session Info
- More Options
- Use u'v' CIE Charts
- Luminance Unit: cd/m²
- Input Level: Video (16-235)
- Stimulus Unit: Percent
- DeltaE Formula: dE ICtCp 720
- Colorspace Target: D65, HD BT.709
- Gamma Formula: ITU BT.1886

Display • 75Q9FN Target Black and White: 0.0001 cd/m², fL 3E-05 Target Gamma: 1.0

(B) Display Settings

- AV Mode: Cal Day 100 nits
- Color Temp: Warm 2
- Sharpness: 0
- Color: 25
- Tint: 0
- Contrast: 40
- Brightness: 1
- Backlight: 20
- TV Gamma: 0
- Cut: Red -2, Green -4, Blue -2
- Gain: Red -4, Green -4, Blue -4

(C) Hardware Configuration

- 1 Meter**: Find → Kill All, Manage, Mode: Simulated, Simulated Meter, Profile, Simulated
- 2 Pattern Source**: Find → Kill All, Manage, Source, Size: Constant APL 18, Delay: 0.5
- 3 Display / Processor**: Find → Kill All, Manage, Display Slot: CMS 0, Gray Levels: 21, Lumagen Radiance 3D LUT, Radiance series 460800 baud COM4 with 3D LUT, DDC

(D) Meter Setup: Position the meter as required for the projector or flat panel to insure accurate measurements when taking readings.

(E) Dynamic Range: Select a suitable set of gray data points and check the gamma level across the full grayscale based on the current settings, and adjust the display's various level controls to get a suitable lowest and highest value, tweaking available Backlight, Brightness, Contrast and such, and optimize RGB fluctuations. Select a clipping set of data points to check there is no clipping of the three primaries below and above the White level.

Gamma: White / Black: 100 / 0, Level: 5, Target: 2.4, Gamma 0: 2.4, CCT 0: 6503, Y 0: 0.0763

PRP Setup

- Back, Next
- MtStb, MtPrf, HOME, Prepare, MtStb, MtPrf, PreCal Read, Calibrate, Gry, CMS, Sat, LUT, Lum, CCK, PostCal Read, Analyze
- Final Check, Setup

Session Setup 10/29/2018 Calibration

(A) Session Options

Start New Session

Setup Notes

Calibration Description / Goals

Notes ↗ ↘

Display • 75Q9FN

Target Black and White cd/m² Blk fL Wht fL

0.0001 3E-05 100 29.2 1

(B) Display Settings

AV Mode Cal Day 100 nits

Color Temp Warm 2

Sharpness 0

Color 25

Tint 0

Contrast 40

Brightness 1

Backlight 20

TV Gamma 0

Cut Gain

Red -2 -4

Green -4 -4

Blue -2 -4

Display Controls

Session Info

More Options

Use u'v' CIE Charts

Luminance Unit cd/m²

Input Level Video (16-235)

Stimulus Unit Percent

DeltaE Formula dE ICtCp 720

Colorspace Target D65, HD BT.709

Gamma Formula ITU BT.1886

Input - Brightness 0

Input - Contrast 0

Input - Color 0

Input - Tint 0

Display Slot CMS 0

Reset Display Slot

20 Point 5% Step 5-100%

RGB DDC

White / Black cd/m² 100 / 0

Level 5

Target Gamma 0 2.4

CCT 0 6503

Y 0 0.0763

Final Check

Setup

PRP Setup

Back Next

HOME Prepare

MtStb MtPrf

Gry CMS Sat LUT Lum CCK PostCal Read Analyze

CaIMAN

(A) Session Options

Session Setup **7/26/2018 Calibration**

Start New Session

Setup Notes

Calibration Description / Goals

Notes

Display • 75Q9FN

cd/m ²	Blk	Target Black and White	Target
0.0001	3E-05	300	87.6
	fL	cd/m ²	fL
	Wht	Red	Cut
		15	-4
		Green	Gain
		16	-1
		Blue	
		17	3

(B) Display Settings

AV Mode **Cal Day 300 nits**

Color Temp	Warm 2	Contrast	41
Sharpness	0	Brightness	1
Color	26	Backlight	29
Tint	15 / 0	TV Gamma	0

(C) Hardware Configuration

Meter Settings

Reference Meter: Simulated Meter - 12345678

Advanced Options

Target Meter: Simulated Meter - 12345678

Advanced Options

Source

Source - 1

Stimulus Level: 100

Prompt for pattern changes

Profile Information

Current Profile: None

Add Profile

Display Type

	I	X	Y	Z
X	0	1	0	0
Y	0	0	1	0
Z	0	0	0	1

Final Check

Setup

Notes

5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 Back Next

CaIMAN

Session Setup | Setup Help | +

Simulated Meter | Simulated | Source | Samsung 2018 QLED CAL-DAY | DDC | Notes | ? |

Setting Up the Session

[Return](#)

(A) CalMAN Session Options

Enter the session description & calibration options in the corresponding dropdowns and text boxes

- Click [Session Info] to enter additional information
- Click [More Options] to open the options panel - the red [X] can be used to close it
- Click the checkmark above/below [Big] to expand the note next to it

(B) Display Settings

Enter the initial display settings to use for the calibration in the corresponding boxes - you can provide alternates in the Pre- and Post-Calibration layouts

(C) Hardware Configuration

1. To start calibrating your display/processor, first connect your meter.
 - a) Click the meter [Find] button and select your meter.
 - b) Select the Target Display Type.
2. Connect to your reference pattern source generator.
 - a) Click the source [Find] button, and select your Source.
 - b) Select the pattern window size and resolution.
3. Connect to your display/processor.
 - a) Click the display [Find] button and select your display or processor.
 - b) Click [DDC] to show the Direct Display Control panel when appropriate
4. Click the corresponding [Configure] button for more options.
5. Click on Profile to select, edit or create a meter profile.

(D) Meter Positioning

- 1a. For projectors position the meter facing the projection screen, far enough away from the screen to avoid reading the meter's own shadow (see illustration on the left). Continue to take readings.
- 1b. Press the read continuous button to take measurements of a white window while moving the meter up/down/left/right, until the Y Max reading is largest. When Y Max is highest, click Stop.
2. For flat panels position the meter on the center of the screen (see illustration on the right). You do not need to take readings for this placement.
3. You can also read the White level CCT based on the current settings - adjust the display's color temperature to best match the target CCT.

[Return](#)

(E) Dynamic Range

Overall Range

Adjust the Backlight control (for LED) to get the desired compromise between black and white levels: less Backlight = deeper black but lower white level, more Backlight = brighter white but higher black level too.

White Level

Data Points: select Clipping or Clipping with Peak White.
Adjust the Contrast to maximize the white level without clipping any of the three primaries.

Gamma Level

Data Points: select a full set of grayscale points for this.
Check the gamma level across the full grayscale based on the current settings, and adjust the display's gamma control to get a good match, tweaking with the Brightness for Black level & Contrast for White.

CalMAN

Meter Stability



Simulated Meter
Simulated Source
Samsung 2018 QLED
CAL-DAY

↑ Session Setup

dE ICtCp w/ Luminance Error




≡ Meter Stability ≡

CIE 1976 u'v'

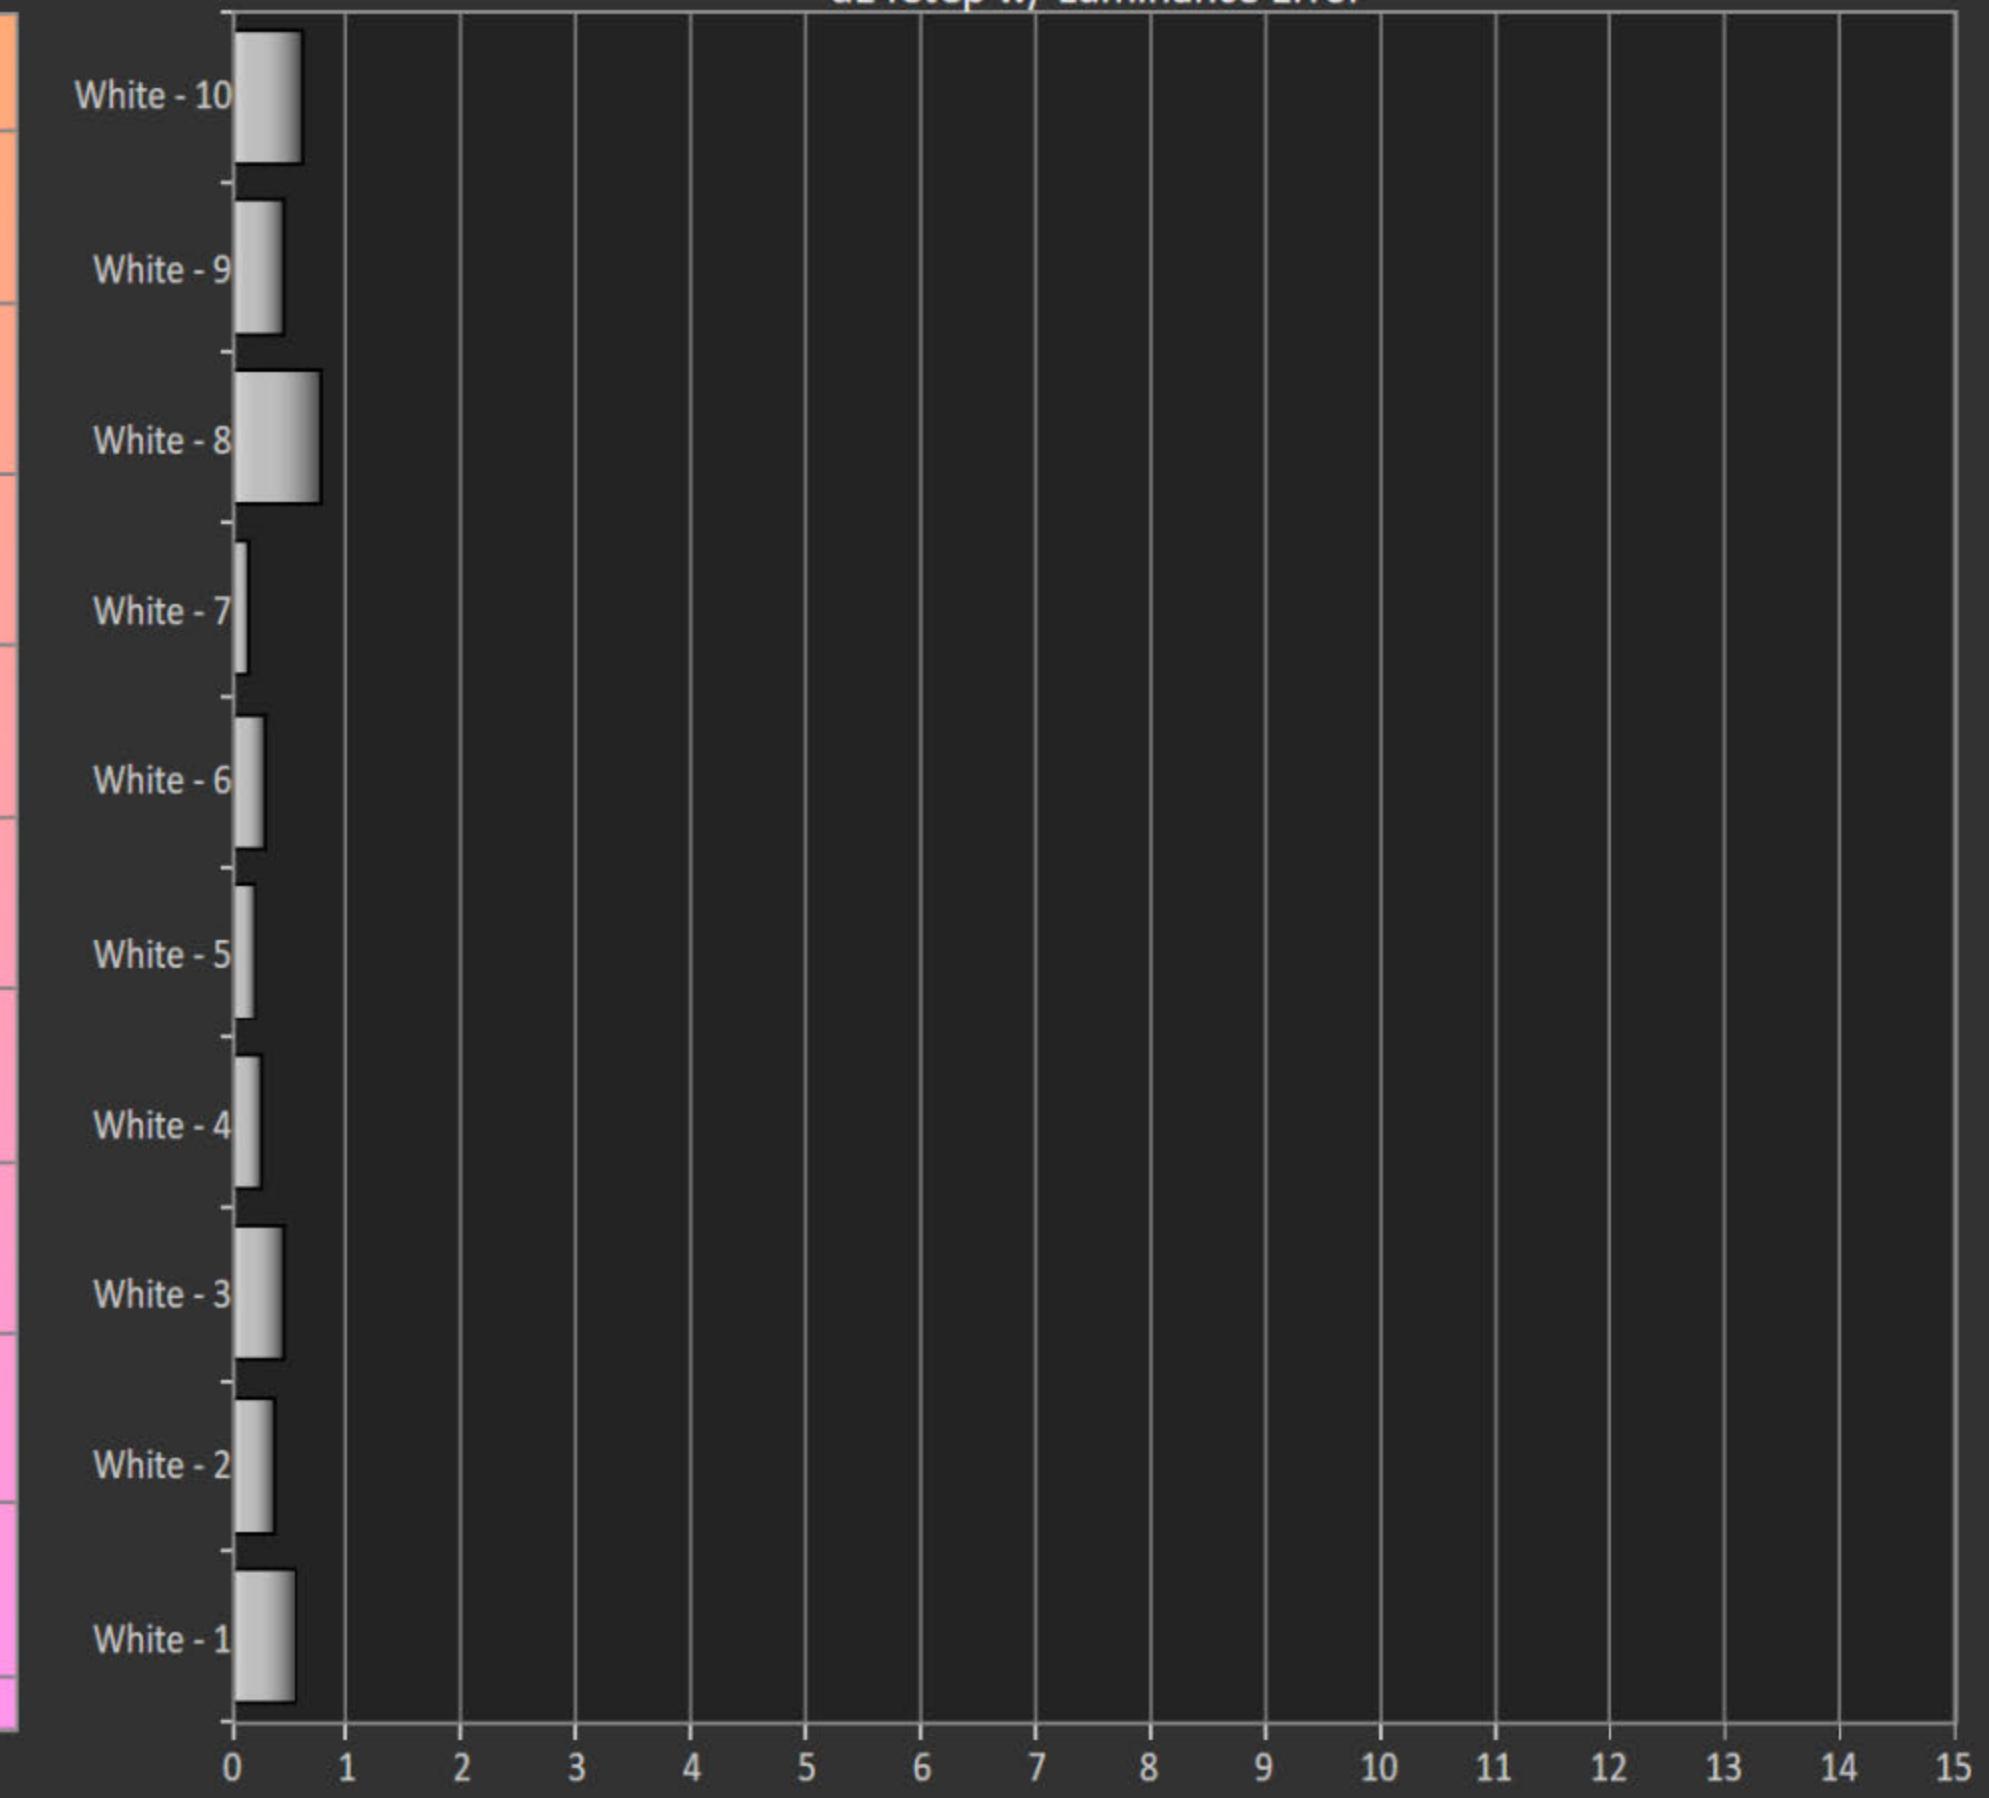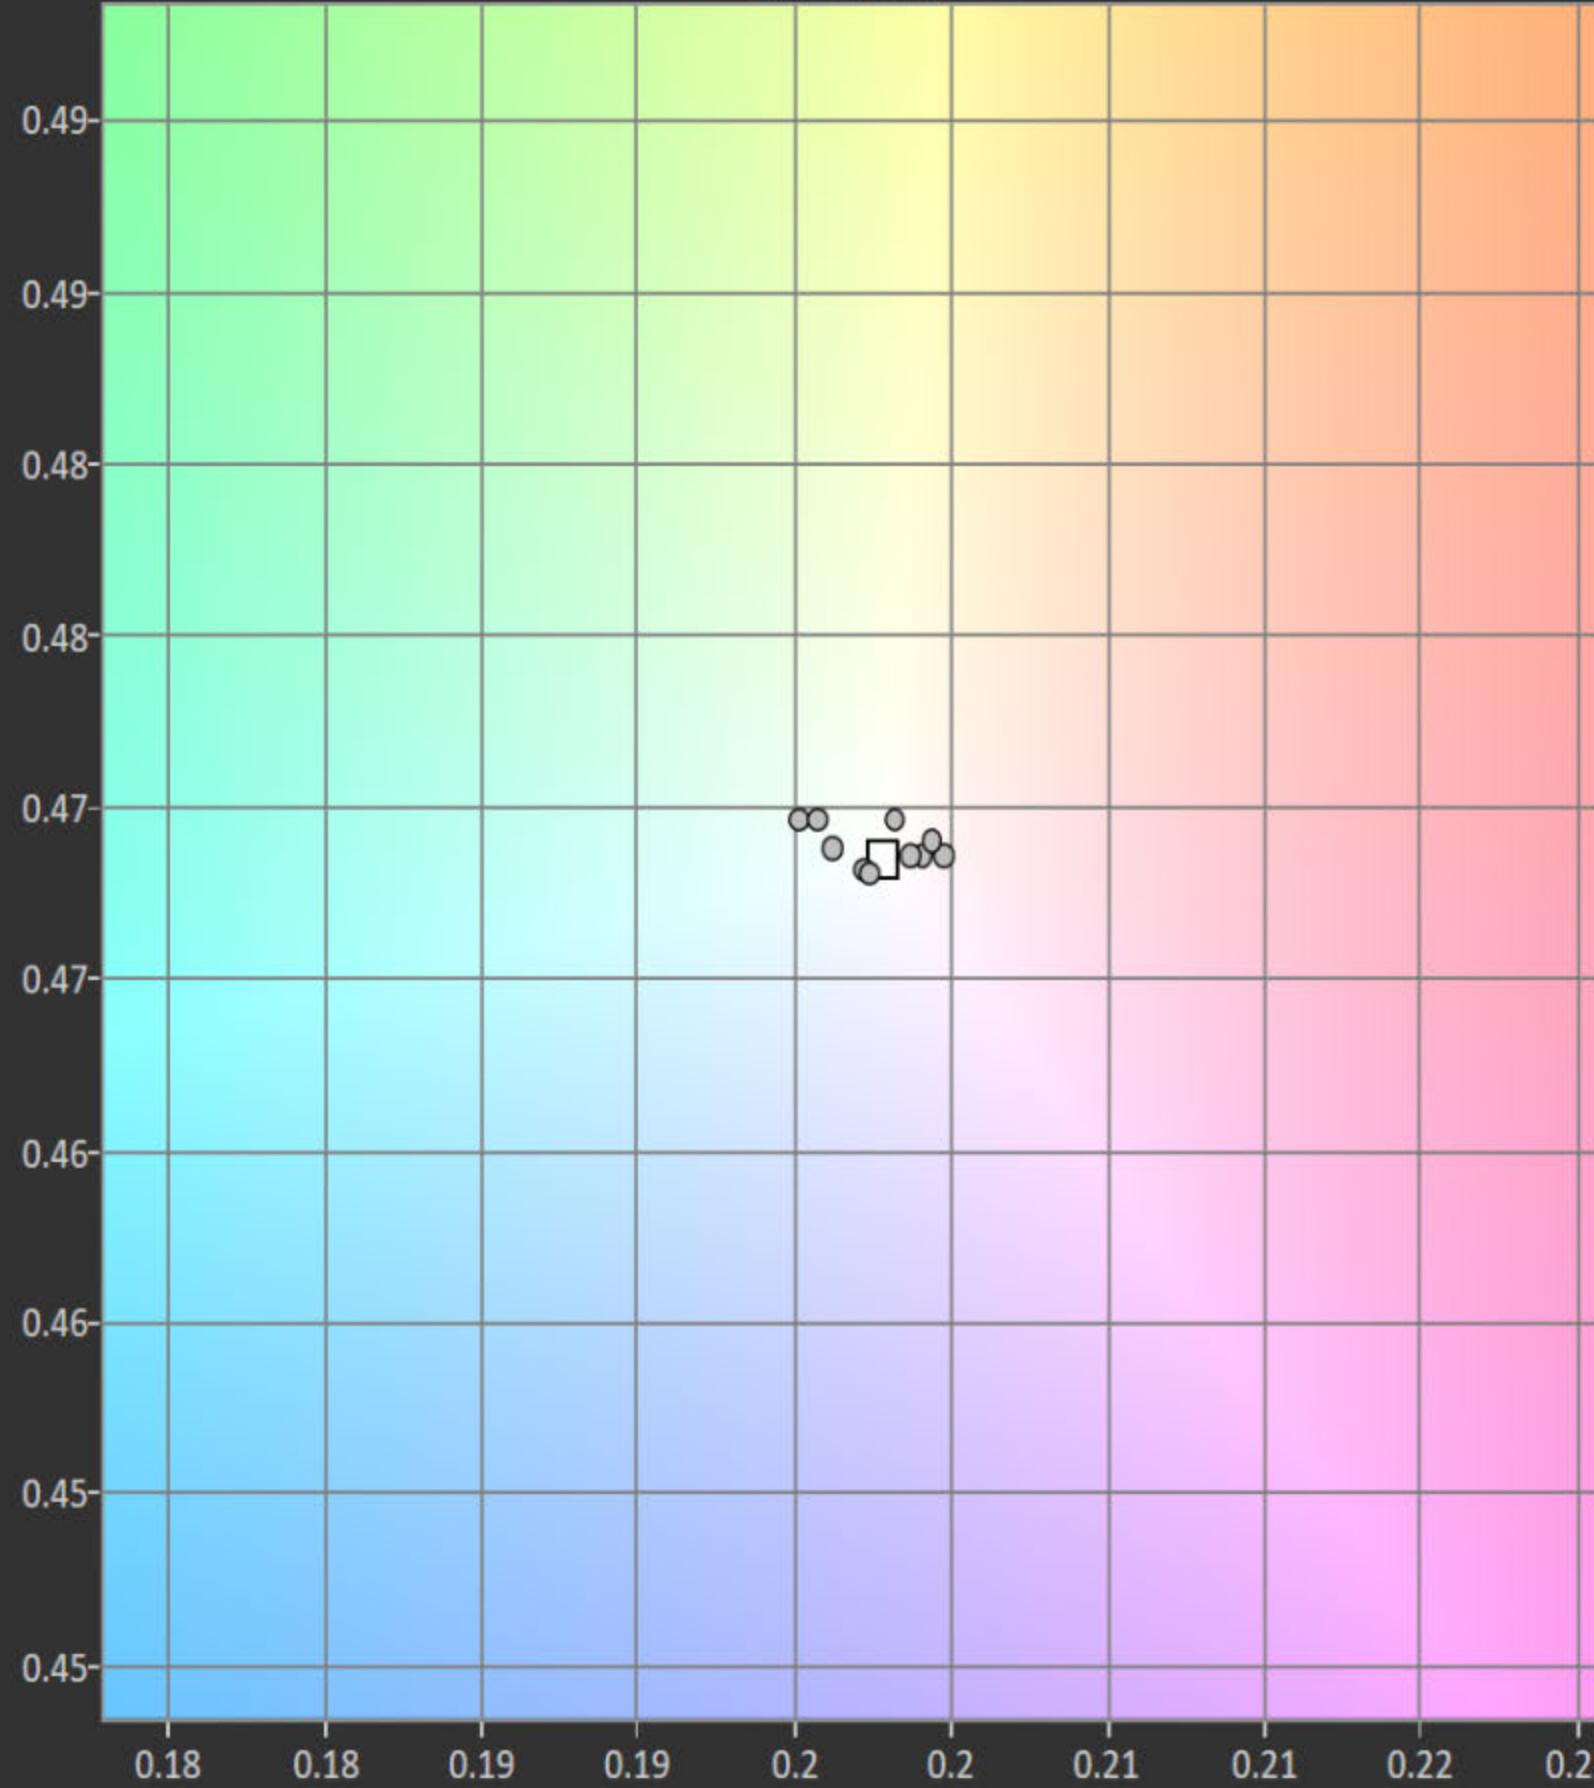

Stop

Read 10

Read One
Check Drift

Clear History

PRP

ScUni

↑ Setup



HOME

Prepare

↑ Setup

Calibrate

Analyze



White

Red

Green

Blue


Cyan

Magenta

Yellow

100W

ScUni

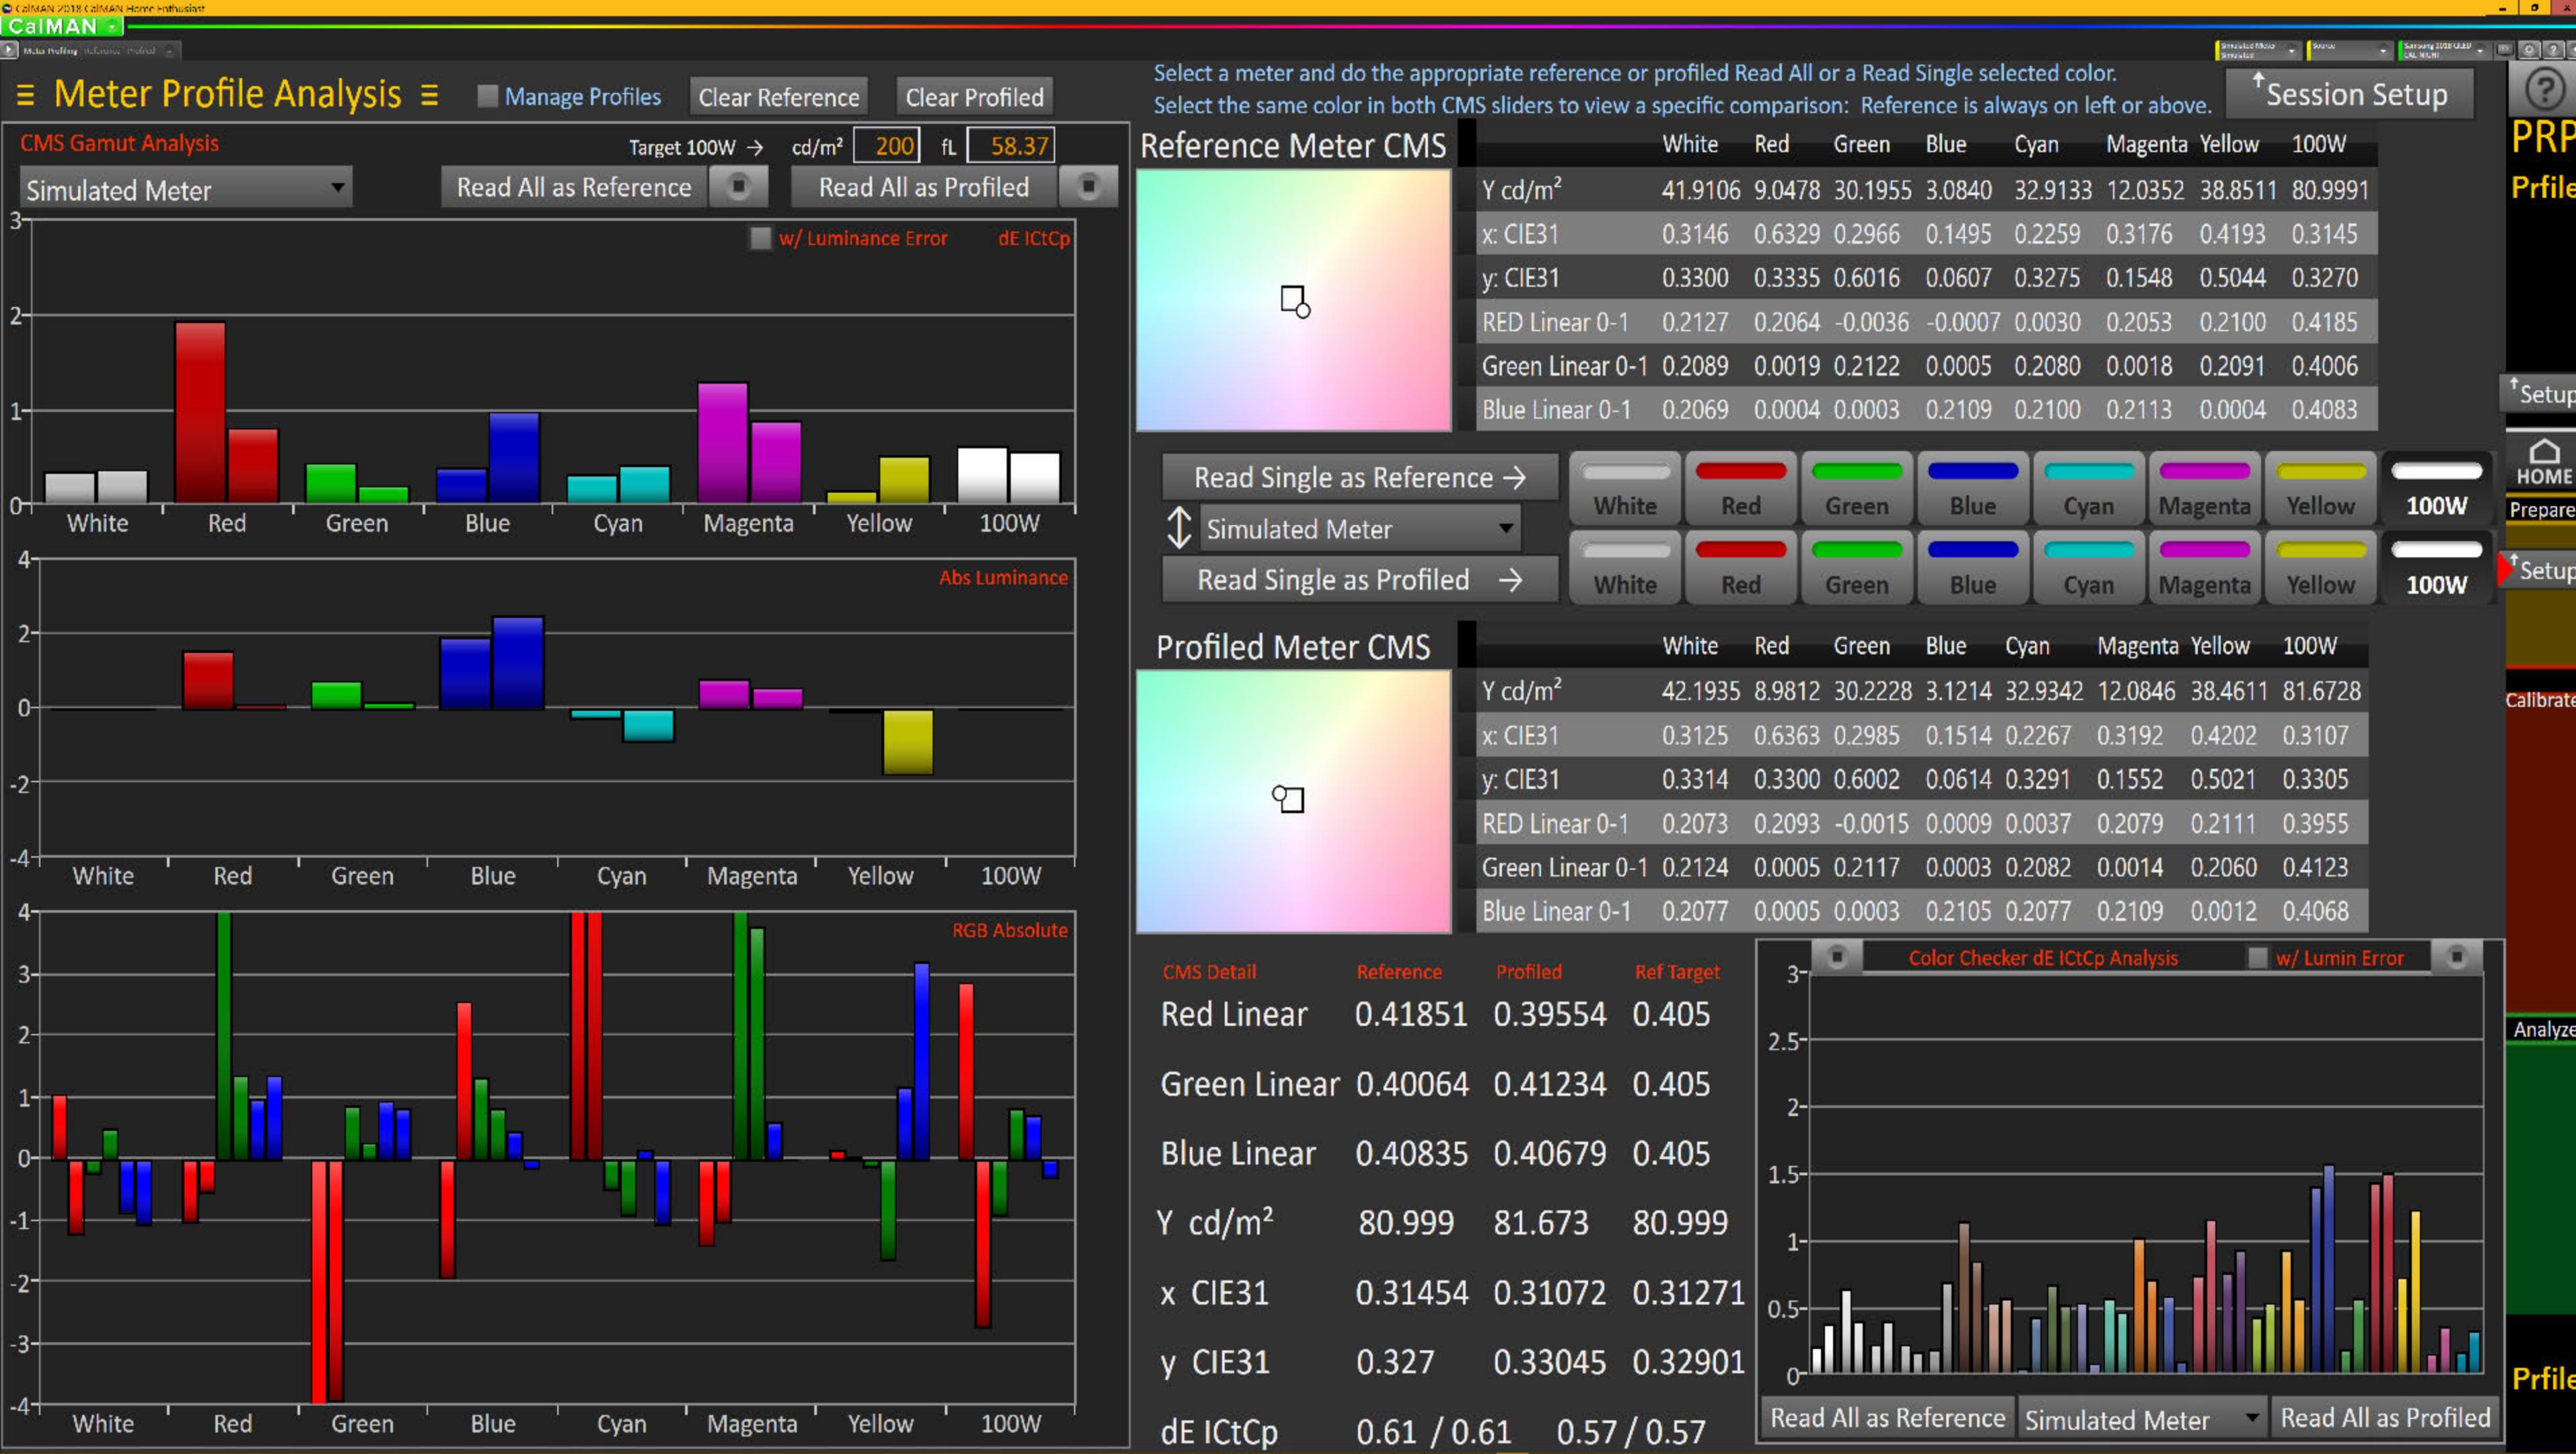

CalMAN 2018 CalMAN Home Enthusiast

Meter Profile Analysis

Manage Profiles Clear Reference Clear Profiled

Select a meter and do the appropriate reference or profiled Read All or a Read Single selected color.
Select the same color in both CMS sliders to view a specific comparison: Reference is always on left or above.

Session Setup

Create Profile

Meter Settings

Reference Meter: Simulated Meter - 12345678

Advanced Options

Target Meter: Simulated Meter - 12345678

Advanced Options

Source: Find more meters

Source - 1

Stimulus Level: 100

Select stimulus between 75 - 85 to avoid clipping and better sample the display

Prompt for pattern changes

Profile Information

Current Profile: None

Add Profile

Display Type: Simulated

	I	X	Y	Z
X	0	1	0	0
Y	0	0	1	0
Z	0	0	0	1

Reference Meter CMS

	White	Red	Green	Blue	Cyan	Magenta	Yellow	100W
Y cd/m ²	41.9106	9.0478	30.1955	3.0840	32.9133	12.0352	38.8511	80.9991
x: CIE31	0.3146	0.6329	0.2966	0.1495	0.2259	0.3176	0.4193	0.3145
y: CIE31	0.3300	0.3335	0.6016	0.0607	0.3275	0.1548	0.5044	0.3270
RED Linear 0-1	0.2127	0.2064	-0.0036	-0.0007	0.0030	0.2053	0.2100	0.4185
Green Linear 0-1	0.2089	0.0019	0.2122	0.0005	0.2080	0.0018	0.2091	0.4006
Blue Linear 0-1	0.2069	0.0004	0.0003	0.2109	0.2100	0.2113	0.0004	0.4083

Read Single as Reference →

Simulated Meter

Read Single as Profiled →

White	Red	Green	Blue	Cyan	Magenta	Yellow	100W
White	Red	Green	Blue	Cyan	Magenta	Yellow	100W
White	Red	Green	Blue	Cyan	Magenta	Yellow	100W

Profiled Meter CMS

	White	Red	Green	Blue	Cyan	Magenta	Yellow	100W
Y cd/m ²	42.1935	8.9812	30.2228	3.1214	32.9342	12.0846	38.4611	81.6728
x: CIE31	0.3125	0.6363	0.2985	0.1514	0.2267	0.3192	0.4202	0.3107
y: CIE31	0.3314	0.3300	0.6002	0.0614	0.3291	0.1552	0.5021	0.3305
RED Linear 0-1	0.2073	0.2093	-0.0015	0.0009	0.0037	0.2079	0.2111	0.3955
Green Linear 0-1	0.2124	0.0005	0.2117	0.0003	0.2082	0.0014	0.2060	0.4123
Blue Linear 0-1	0.2077	0.0005	0.0003	0.2105	0.2077	0.2109	0.0012	0.4068

CMS Detail Reference Profiled Ref Target

Red Linear 0.41851 0.39554 0.405

Green Linear 0.40064 0.41234 0.405

Blue Linear 0.40835 0.40679 0.405

Y cd/m² 80.999 81.673 80.999

x CIE31 0.31454 0.31072 0.31271

y CIE31 0.327 0.33045 0.32901

dE ICtCp 0.61 / 0.61 0.57 / 0.57

Color Checker dE ICtCp Analysis w/ Lumin Error

Analyze

Read All as Reference Simulated Meter Read All as Profiled

PRP
Profile
HOME
Prepare
Calibrate
Setup
Pfile

CalMAN

Screen Uniformity

Rows 3 Columns 3 Left to right

Session Setup

PRP ScUni

Setup

HOME Prepare

Setup

Calibrate

Analyze

Gray Levels Only 4 Point 25% step 25-100%

Target Y 14.4603 Read 0 ΔE 0

25 50 75 100

Type Grayscale ScUni

The main window displays a 3x3 grid of 9 cells, each containing the value "0.0". The grid is defined by a white crosshair. Above the grid, there are three dropdown menus: "Rows 3", "Columns 3", and "Left to right". To the right of the grid, there is a "Session Setup" button. On the far right, there is a vertical toolbar with several buttons: "PRP", "ScUni", "Setup", "HOME", "Prepare", "Setup", "Calibrate", and "Analyze". At the bottom of the screen, there is a status bar with the text "Gray Levels Only 4 Point 25% step 25-100%", "Target Y 14.4603 Read 0 ΔE 0", and a series of numerical buttons (25, 50, 75, 100). On the far right, there is a vertical color calibration progress bar with a green-to-red gradient.



CalMAN

2-Point Grayscale Calibration

Grayscale 2-Point Adjust

- Reduce the Red, Green, and/or Blue (RGB) High controls to the lowest measured R, G, or B after the initial measurement of bright grayscale pattern. Continue doing this until you balance RGB to a deltaE of 3 or below (chart below).
- Balance the RGB Low controls (if provided), while measuring a dark grayscale pattern.
- Re-measure both bright grayscale and dark grayscale until both RGB High and RGB Low are balanced and DeltaE is under 3.

Selecting Points:

- 30% and 80%:** Use these levels if you only have access to a two point grayscale adjustment
- 30% and 100%:** Use these levels if you will be completing a multipoint adjustment afterwards and do not have access to a Peak White pattern.
- 30% and Peak White:** Use these levels if your display does not clip and you will be completing a multipoint calibration and want the best possible results.

	30	100
RGB Triplet	82, 82, 82	235, 235, 235
Red index	82.0000	235.0000
Green index	82.0000	235.0000
Blue index	82.0000	235.0000
X	5.6020	78.2089
Y cd/m ²	5.9194	80.8831
Z	6.4321	88.7290
Xn 0-1	0.0280	0.3910
Yn 0-1	0.0296	0.4044
Zn 0-1	0.0322	0.4436
Stimulus Percent	0.3014	1.0000
RED Stim%:0-1	0.3014	1.0000
GRN Stim%:0-1	0.3014	1.0000
BLU Stim%:0-1	0.3014	1.0000

RGB Balance

Color	30	100
Red	-86.5	0
Green	-92	0
Blue	-89.8	0

Luminance

Point	30	100
30%	~10	~80
100%	~20	~200

EOTF

Color	30	100
Red	~0.25	~0.48
Green	~0.25	~0.48
Blue	~0.25	~0.48
Gray	~0.25	~0.48

Gamma

Color	30	100
Red	~3.0	~2.8
Green	~3.0	~2.8
Blue	~2.3	~2.2
Gray	~2.8	~2.8

dE ICtCp

Point	30	100
30%	~0.89	~0.89
100%	~0.89	~0.89

w/ Lumin Error


Point	30	100
30%	~0.89	~0.89
100%	~0.89	~0.89


100

CCT	6364	6503	Target
Gamma	5.43	2.2	Target
dE ICtCp	0.89	/ 44.19	w/ Lumin Error
Read →	80.88313	x	0.3156
Target →	200	y	0.3264
DDC	2 Point 30,100%	Triplet	235, 235, 235

Color checker



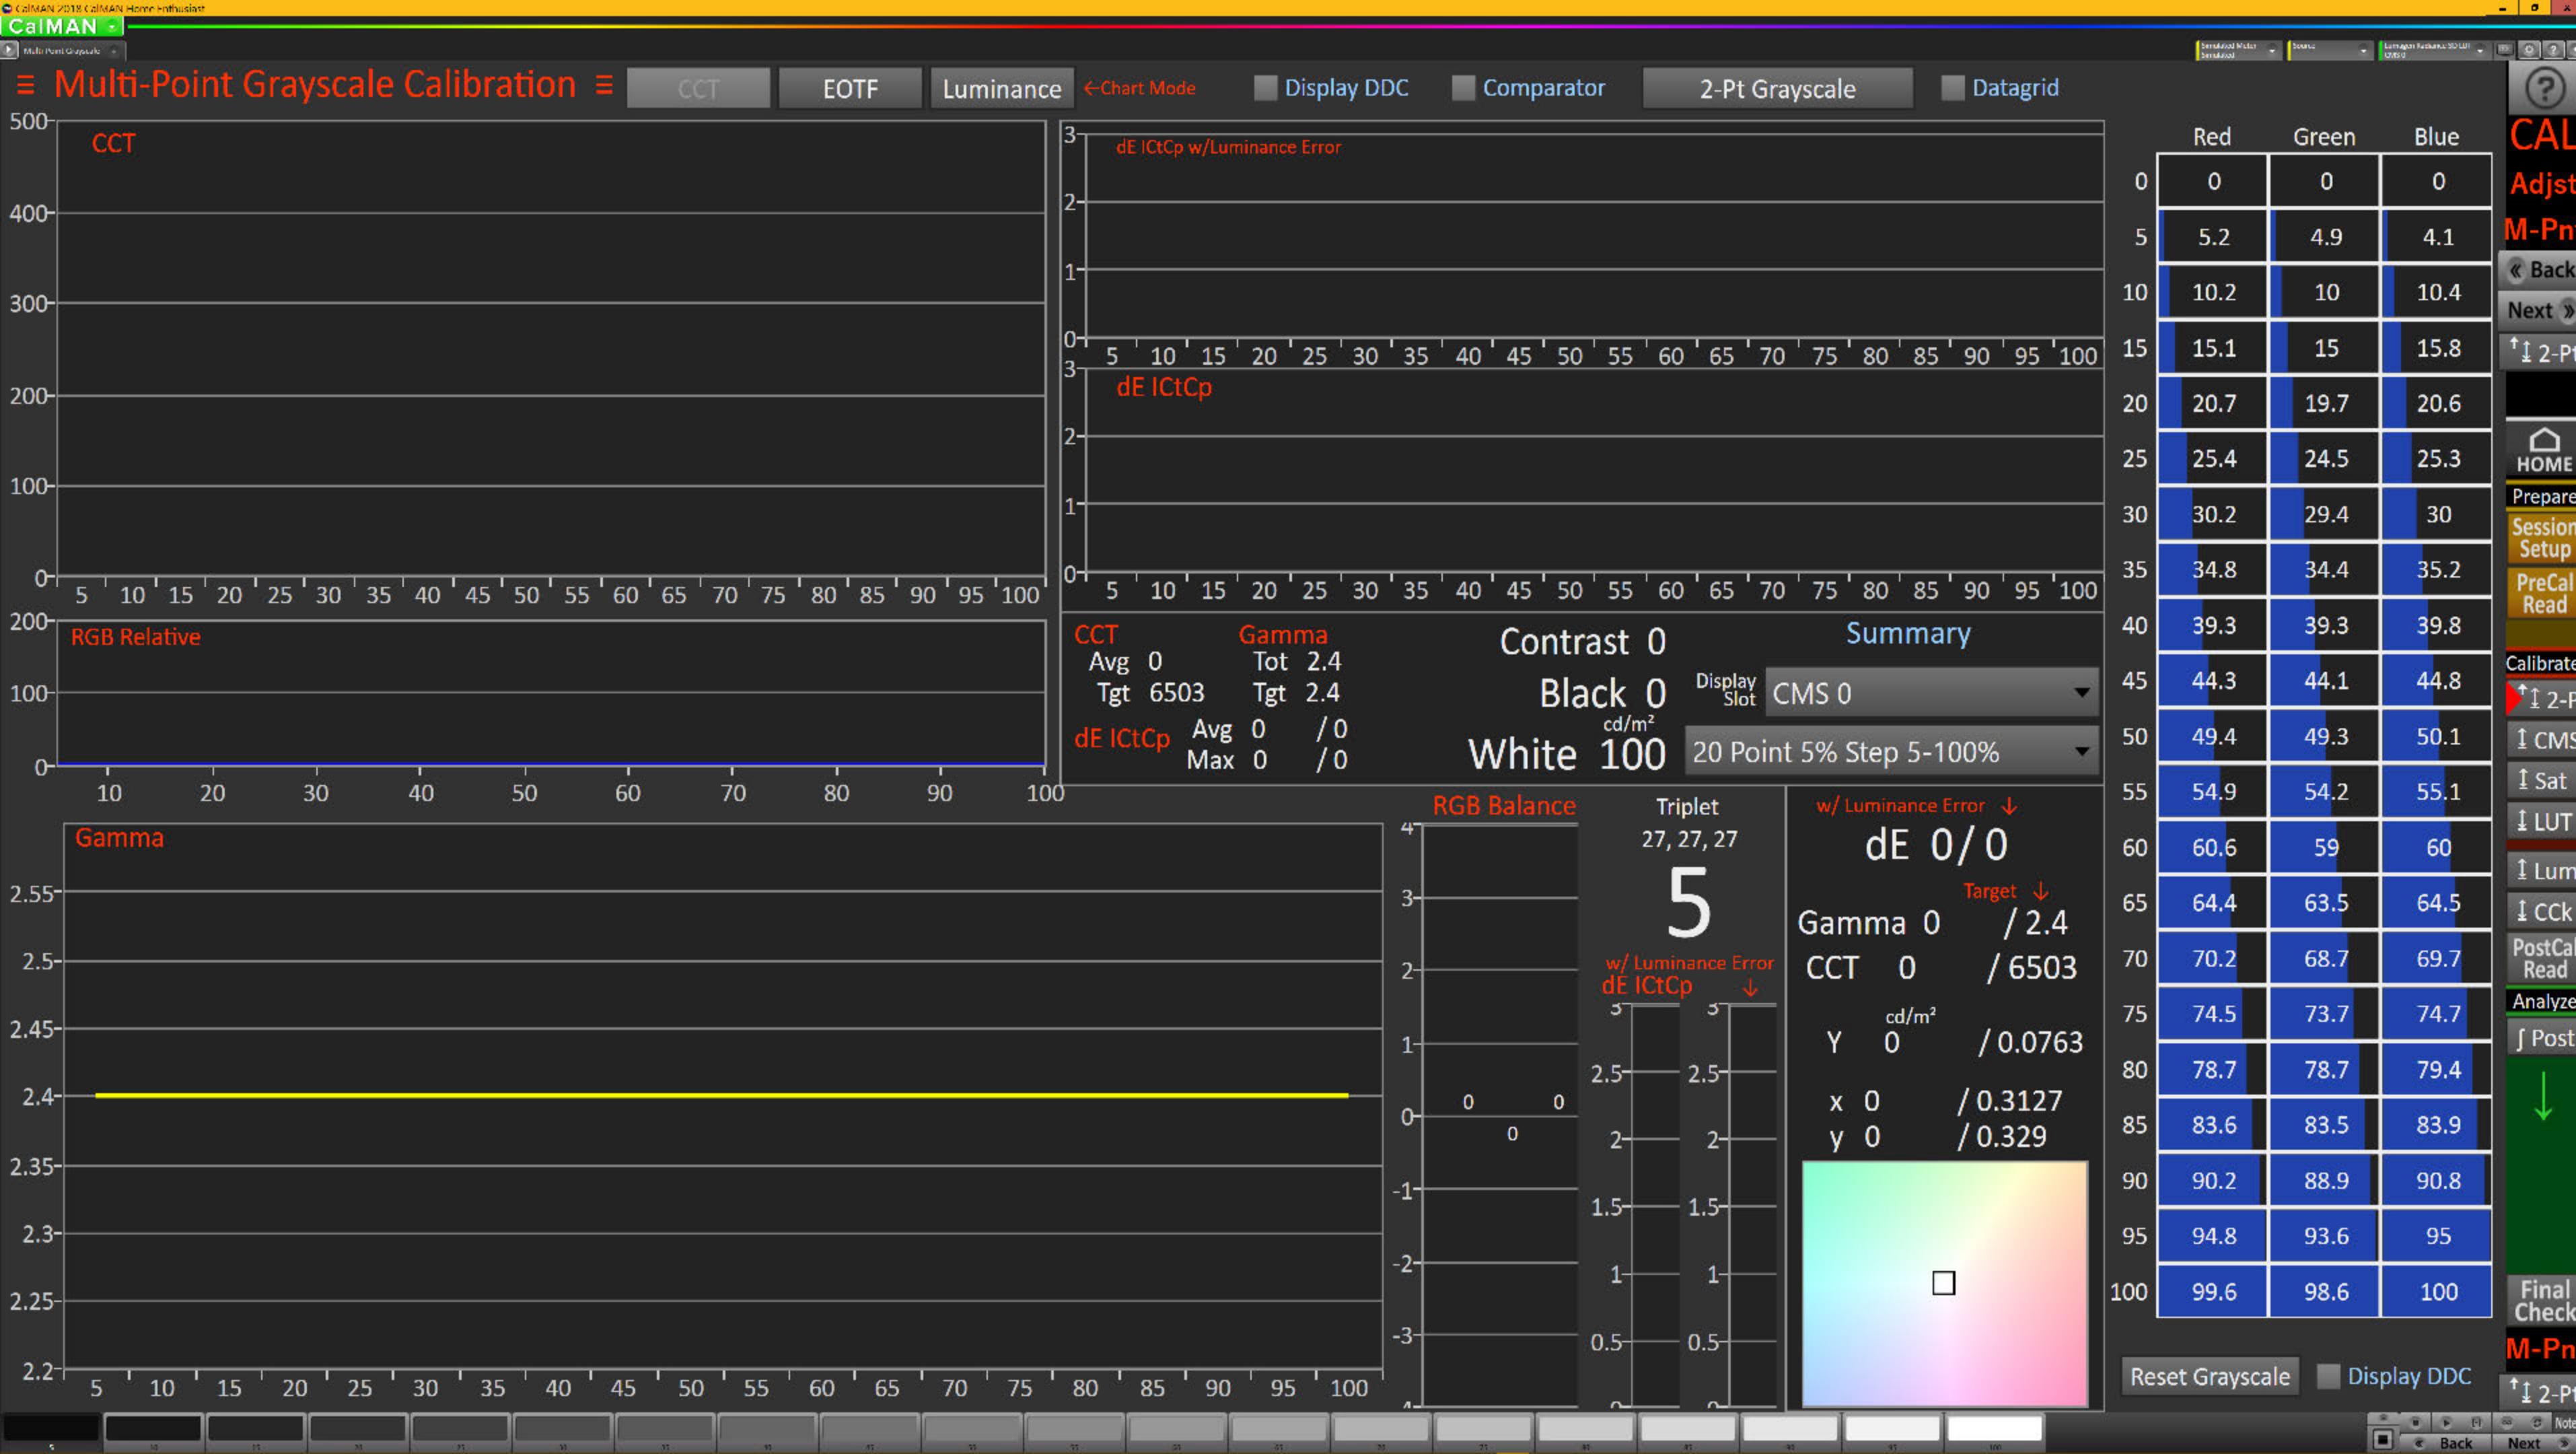

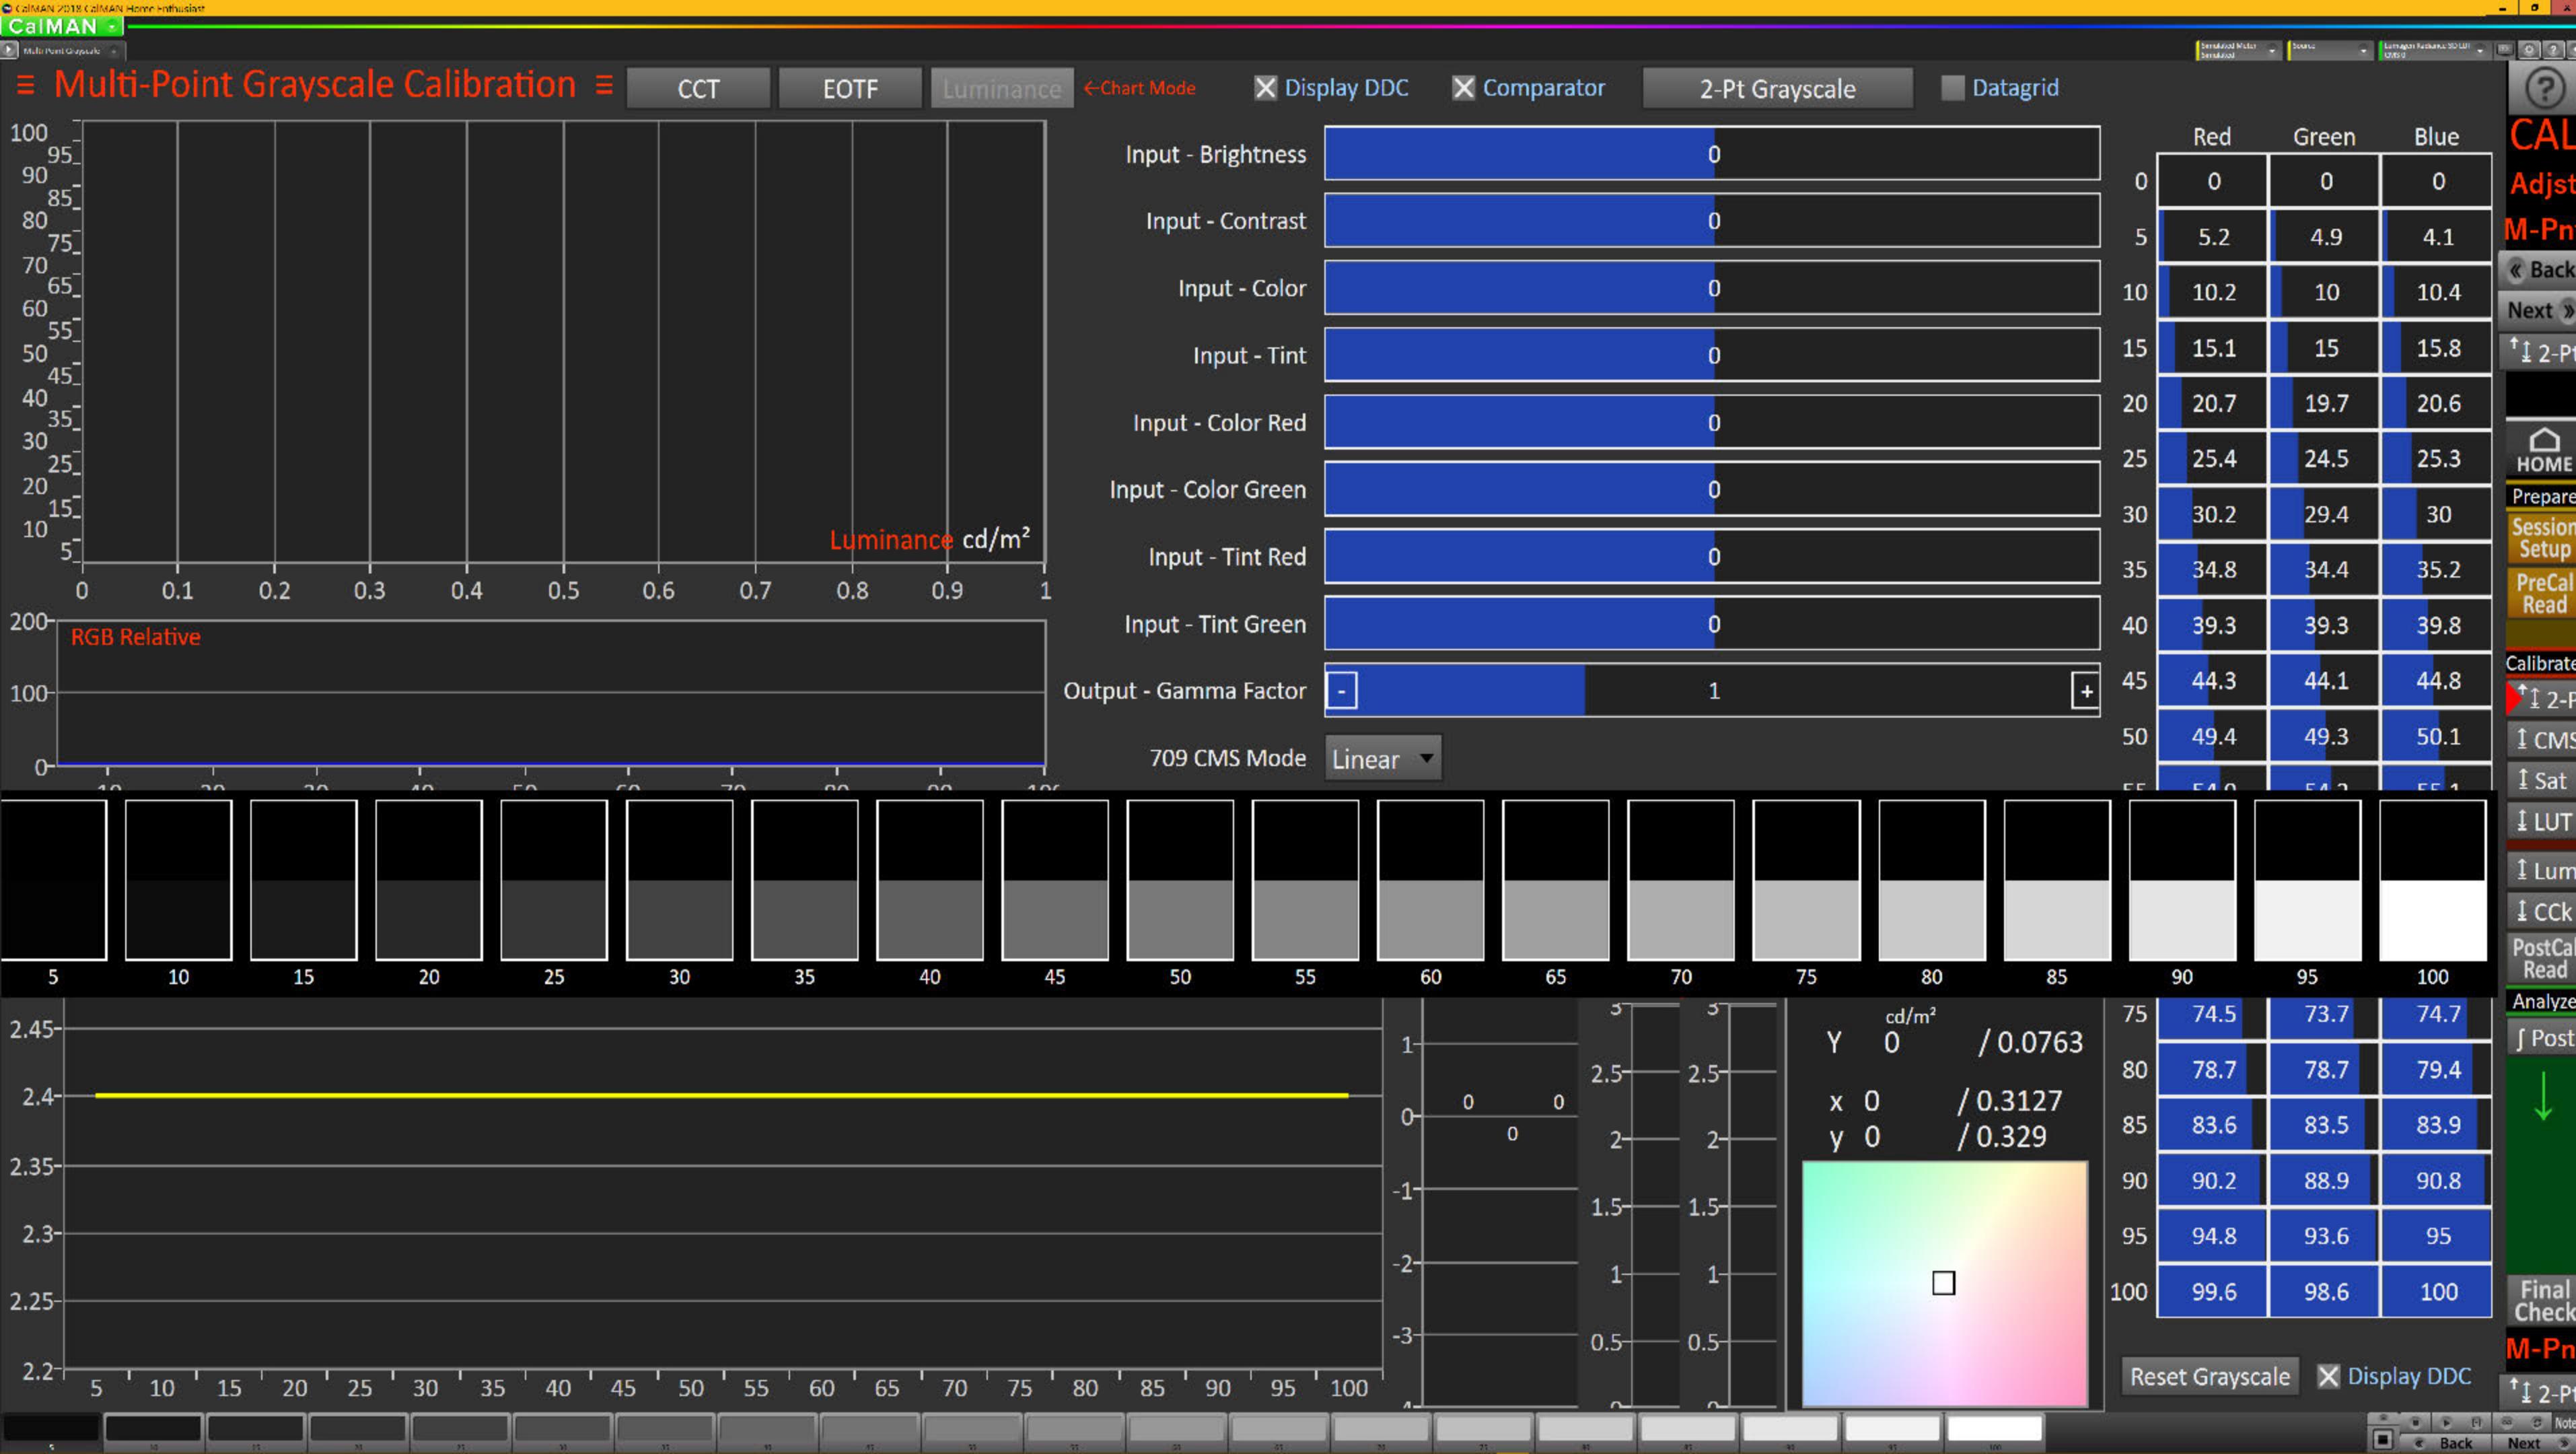

CaIMAN

Multi-Point Grayscale +

Simulated Meter Simulated Source Samsung 2018 QLED CAL-DAY

Click grid to select it then click Configure to select data

Configure ?


CAL Adjst M-Pnt Back Next ↗ 2-Pt HOME Prepare Session Setup PreCal Read Calibrate ↗ 2-Pt ↗ CMS ↗ Sat ↗ LUT ↗ Lum ↗ CCk PostCal Read Analyze ↗ Post ↴ Final Check M-Pnt ↗ 2-Pt Notes

≡ Multi-Point Grayscale Calibration ≡


	CCT	EOTF	Luminance	← Chart Mode	Comparator	2-Pt Grayscale	Datagrid														
7	10.5	15.5	19.6	24.7	29.7	35	39.7	44.7	49.8	55	60.3	65	70	75.3	81	CAL					
RGB Triplet	31, 31, 31	39, 39, 39	50, 50, 50	59, 59, 59	70, 70, 70	81, 81, 81	93, 93, 93	103, 103, 103	114, 114, 114	125, 125, 125	136, 136, 136	148, 148, 148	158, 158, 158	169, 169, 169	181, 181, 181	193, 19	Adjst				
Target Y cd/m ²	0.2900	0.7277	1.6981	2.8311	4.6531	6.9769	10.1064	13.2032	17.1367	21.6355	26.7115	32.9204	38.6392	45.5110	53.7123	62.6598	M-Pnt				
Y cd/m ²	0.5134	0.9155	1.6907	2.5970	3.9284	5.7230	8.0296	10.3271	13.2350	16.6965	20.6841	25.7408	30.3137	35.5389	42.1846	49.5516	Back				
Target x:CIE31	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	Next ↗				
x: CIE31	0.3142	0.3138	0.3126	0.3120	0.3114	0.3128	0.3143	0.3114	0.3115	0.3140	0.3118	0.3109	0.3115	0.3117	0.3141	0.3115	↑ 2-Pt				
Target y:CIE31	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	↑ 2-Pt				
y: CIE31	0.3272	0.3272	0.3293	0.3302	0.3283	0.3317	0.3283	0.3280	0.3263	0.3282	0.3292	0.3311	0.3291	0.3278	0.3284	0.3283	HOME				
Target CCT	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	Prepare				
CCT	6435.0000	6455.0000	6510.0000	6532.0000	6579.0000	6481.0000	6419.0000	6584.0000	6589.0000	6440.0000	6553.0000	6588.0000	6571.0000	6566.0000	6430.0000	6577.00	Session Setup				
																	PreCal Read				
																	Calibrate				
																	↑ 2-Pt				
																	↑ CMS				
																	↑ Sat				
																	↑ LUT				
																	↑ Lum				
																	↑ CCk				
																	PostCal Read				
																	Analyze				
																	↑ Post				
																	Final Check				
																	M-Pnt				
																	↑ 2-Pt				
																	Notes				
7	10.5	15.5	19.6	24.7	29.7	35	39.7	44.7	49.8	55	60.3	65	70	75.3	81	86	90.4	97.7	100	Back	Next ↗

CaIMAN

Gamut Saturation



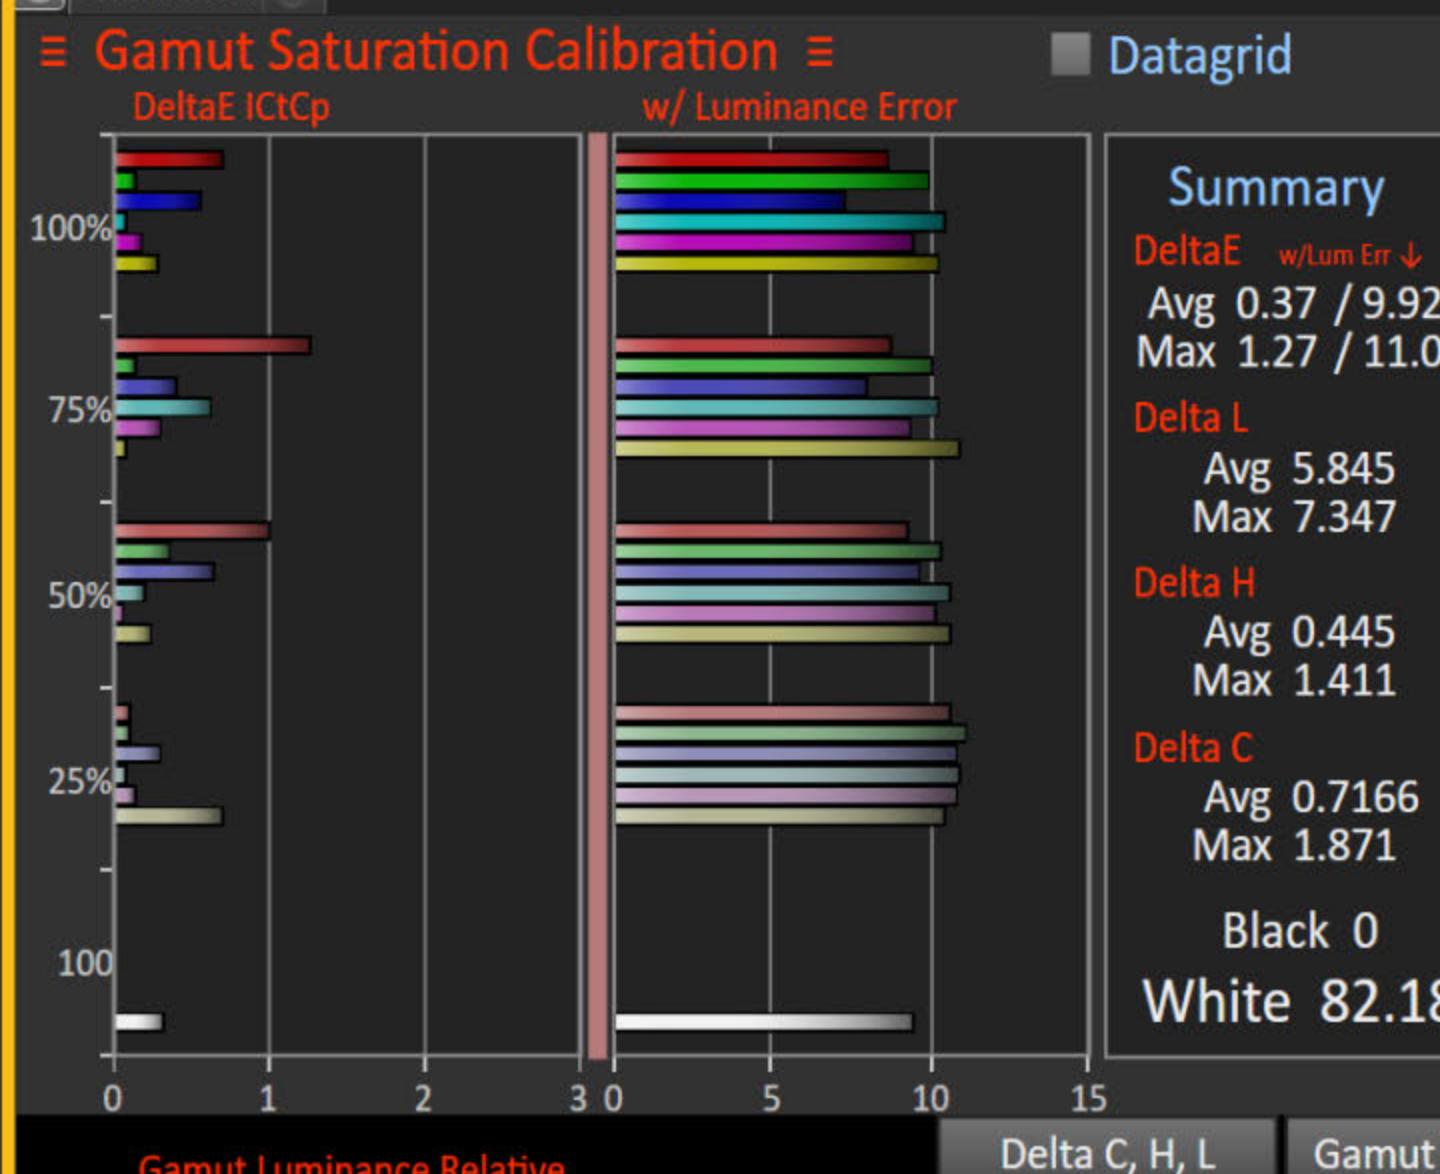


Datagr

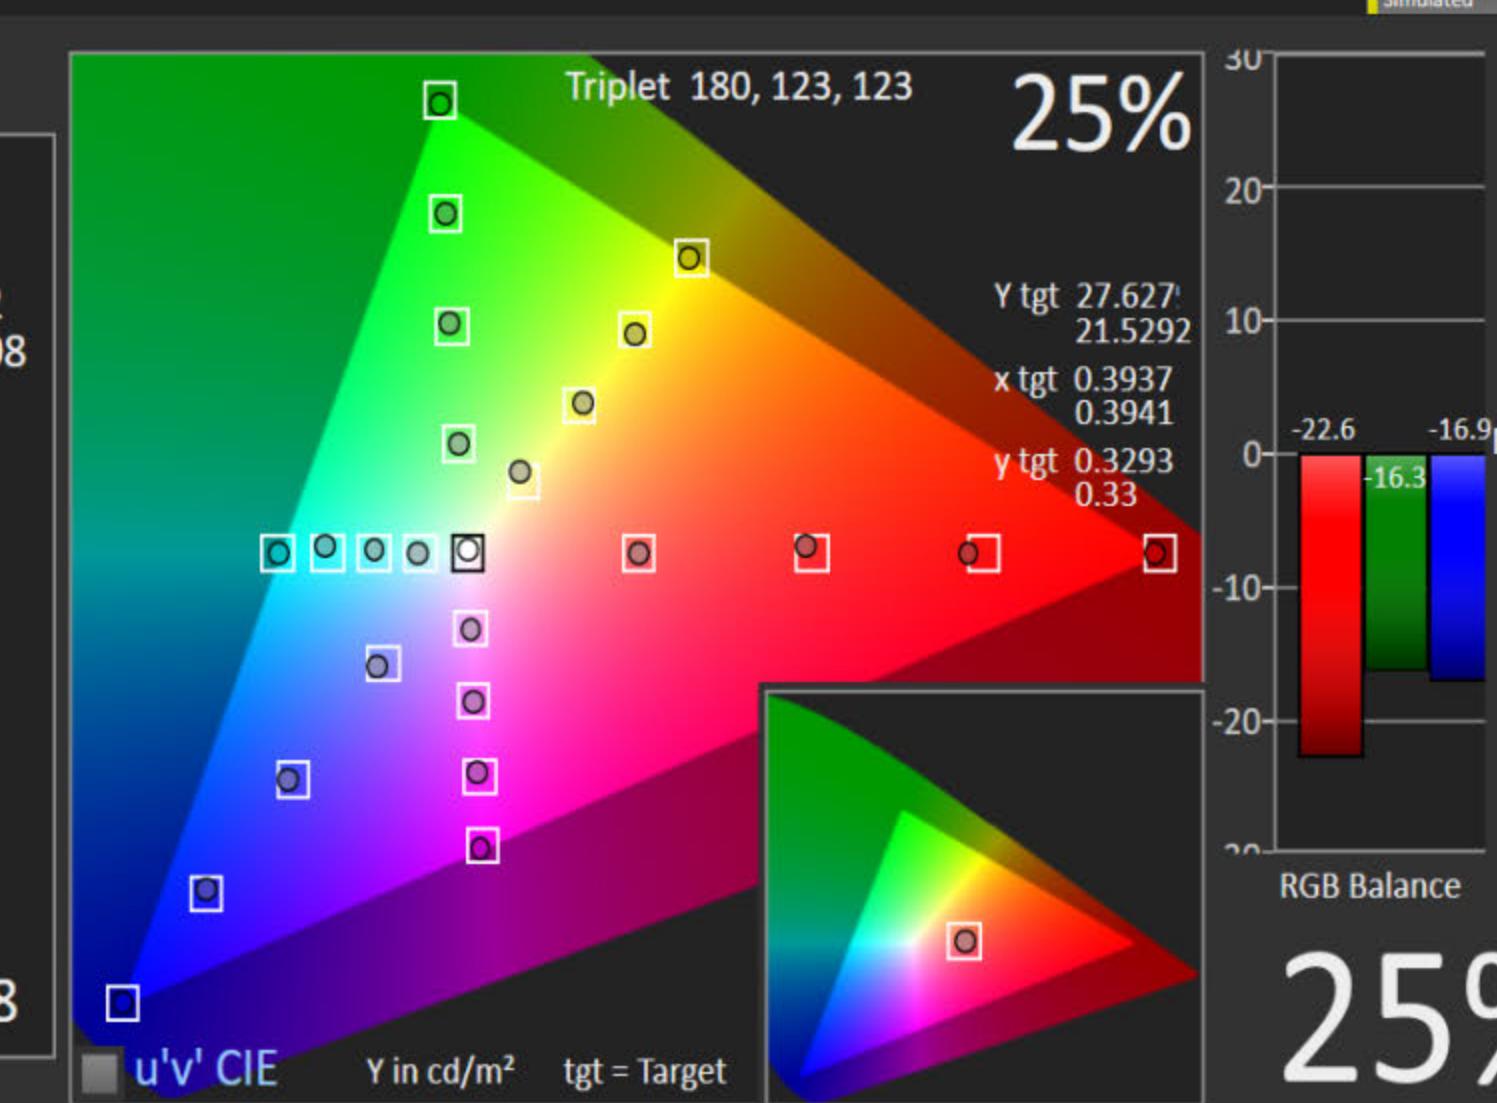

	Red	Green	Blue
Red	29	22	13
Green	45	39	23
Blue	22	23	34
Cyan	49	53	61
Magenta	4	24	55
Yellow	49	56	18

Reset CMS

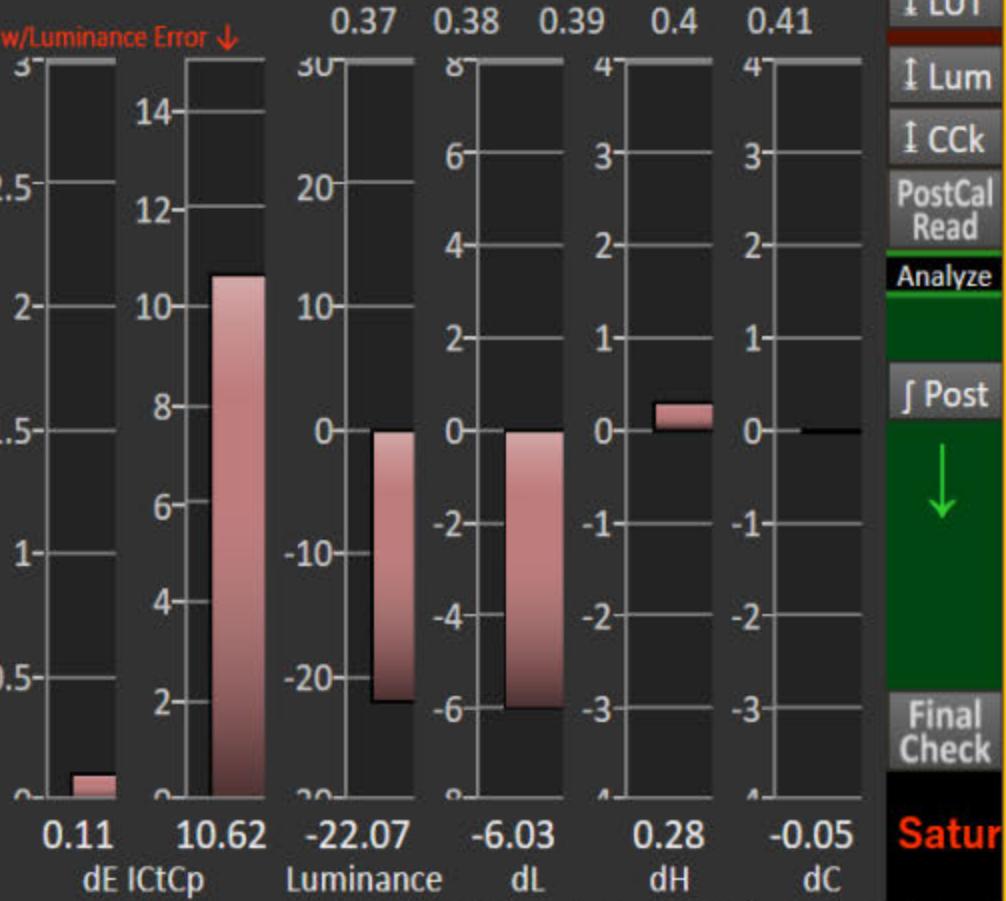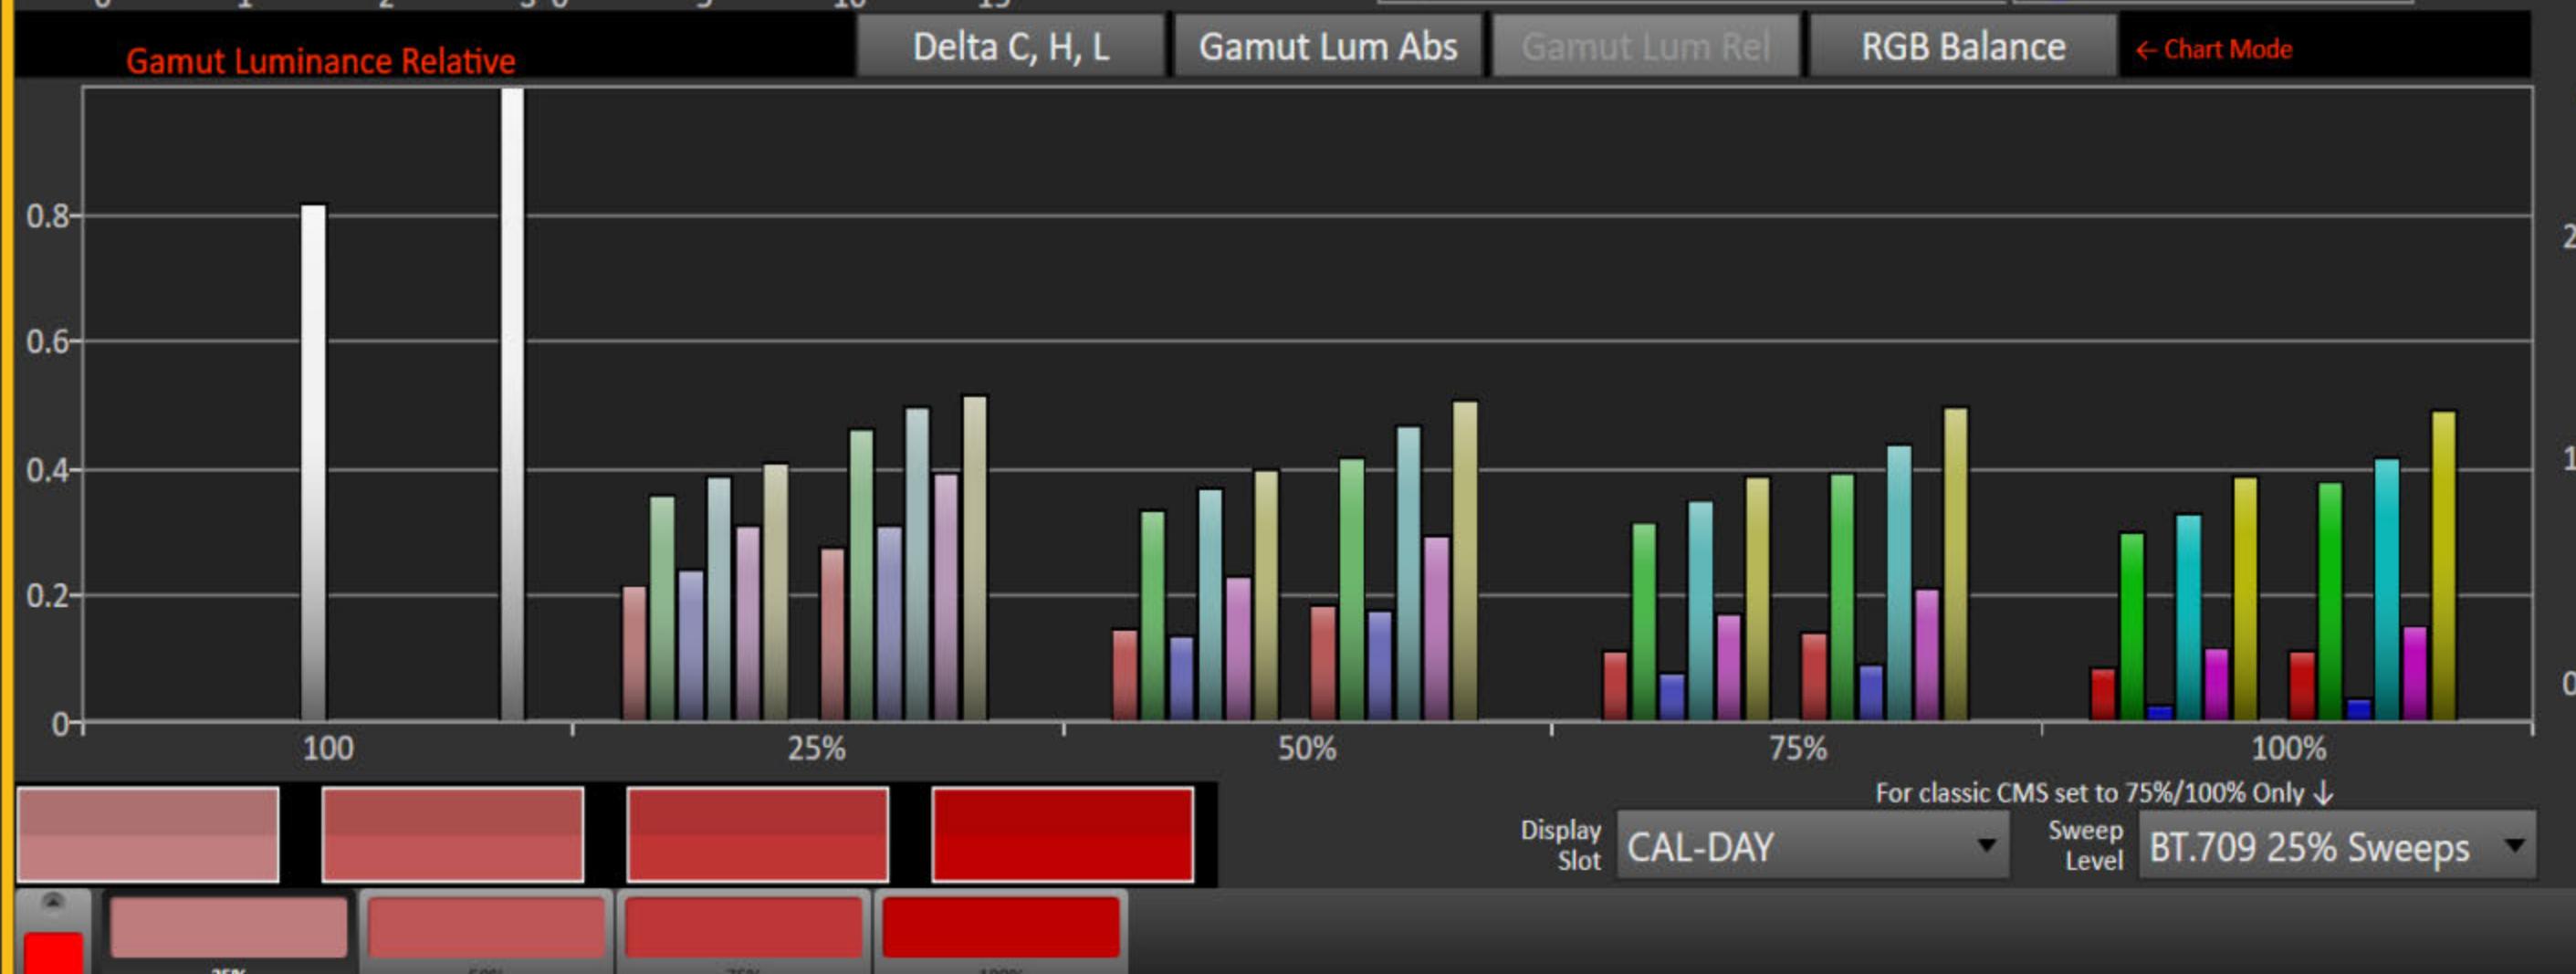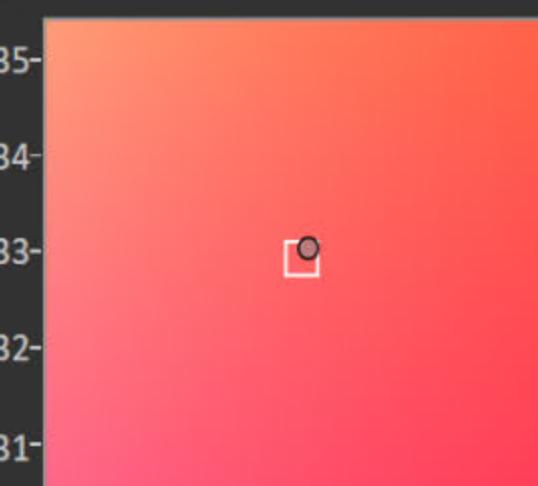

Display Slot CAL-DAY ▼ Sweep Level BT.709 25% Swe

sleeps ▼

0.11 1

0.62 -22.0

07 -6.03

0.28
dII

-0.05 Sat

ur

CaIMAN

Gamut Saturation | + Simulated Meter | Simulated Source | Samsung 2018 QLED CAL-DAY | Notes | ?

Gamut Saturation Calibration × Datagrid

Configure Click datagrid outside bottom right corner to select it then click Configure to select data

	25%	50%	75%	100%
RGB Triplet	180, 123, 123	180, 90, 90	180, 64, 64	180, 16, 16
Target Y cd/m ²	27.6279	18.5654	14.1040	11.2709
Y cd/m ²	21.5292	14.8746	11.3821	9.0538
Target x:CIE31	0.3937	0.4764	0.5563	0.6400
x: CIE31	0.3941	0.4738	0.5491	0.6368
Target y:CIE31	0.3293	0.3295	0.3297	0.3300
y: CIE31	0.3300	0.3328	0.3293	0.3298
Target CCT	3210.0466	1845.3325	1962.9459	3096.5526
CCT	3209.0000	1886.0000	1911.0000	3047.0000

Back Next

HOME Prepare Session Setup PreCal Read Calibrate ↑ Gry ↑ CMS ↑ Sat ↑ LUT ↑ Lum ↑ CCk PostCal Read Analyze ↓ Post Final Check Satur

25% 50% 75% 100% Back Next Notes

CalMAN

CMS Gamut Calibration

Datagrid

Summary

DeltaE w/Lum Err ↓
Avg 0.55 / 0.74
Max 1.13 / 1.19

Delta L
Avg 0.204
Max 0.563

Delta H
Avg 0.622
Max 1.861

Delta C
Avg 1.1997
Max 3.109

Black 0
White 81.5

100W

Triplet 235, 235, 235

Y tgt 81.5311
81.5318
x tgt 0.3127
0.3117
y tgt 0.329
0.3298

RGB Balance

u'v' CIE Y in cd/m² tgt = Target

Red Green Blue

Red	29	22	13
Green	45	39	23
Blue	22	23	34
Cyan	49	53	61
Magenta	4	24	55
Yellow	49	56	18

Reset CMS

0.35 0.34 0.33 0.32 0.31

100W

Delta C, H, L Max 3.109 Avg 1.2

Delta H Max 1.861 Avg 0.622

Delta L Max 0.563 Avg 0.204

w/Luminance Error ↓ 0.29 0.3 0.31 0.32 0.33

Display Slot CAL-DAY

0.28 0.28 0 0 0.85

dE ICtCp Luminance dL dH dC

White Red Green Blue Cyan Magenta Yellow 100W

White Red Green Blue Cyan Magenta Yellow 100W




White Red Green Blue Cyan Magenta Yellow 100W

Notes Back Next

HOME Prepare Session Setup PreCal Read Calibrate ↴ Gry ↴ CMS ↴ Sat ↴ LUT ↴ Lum ↴ CCk PostCal Read Analyze ↴ Post Final Check CMS


CaIMAN

Gamut Luminance

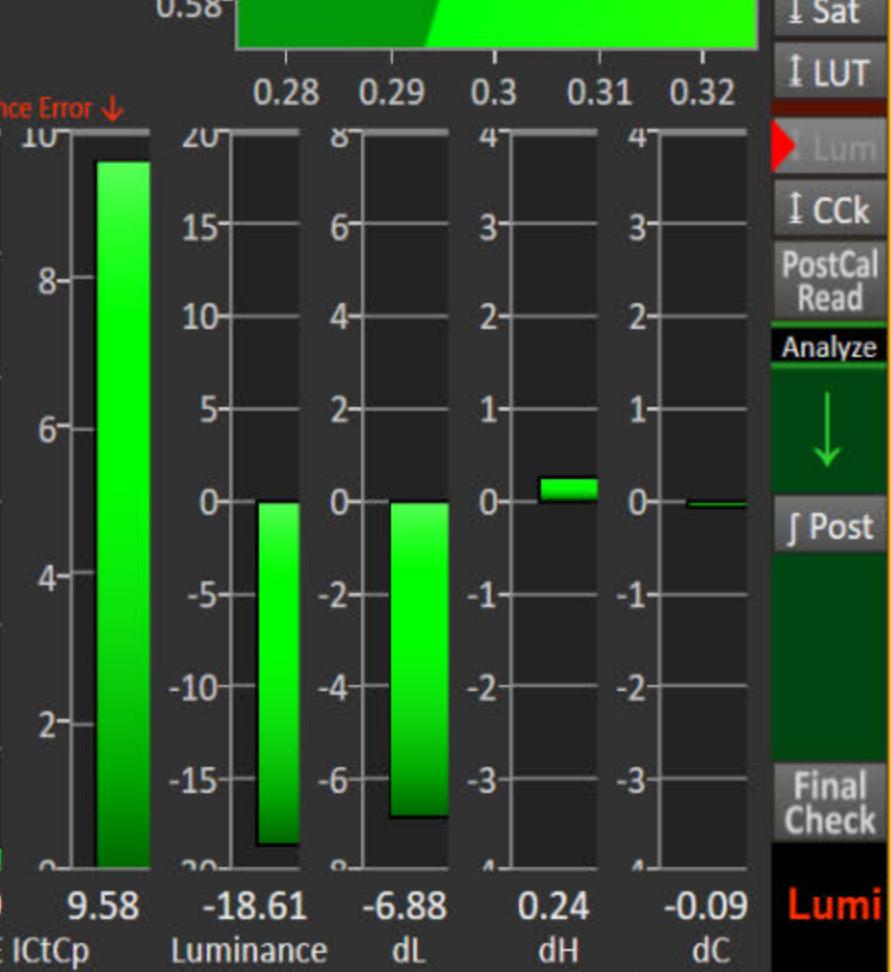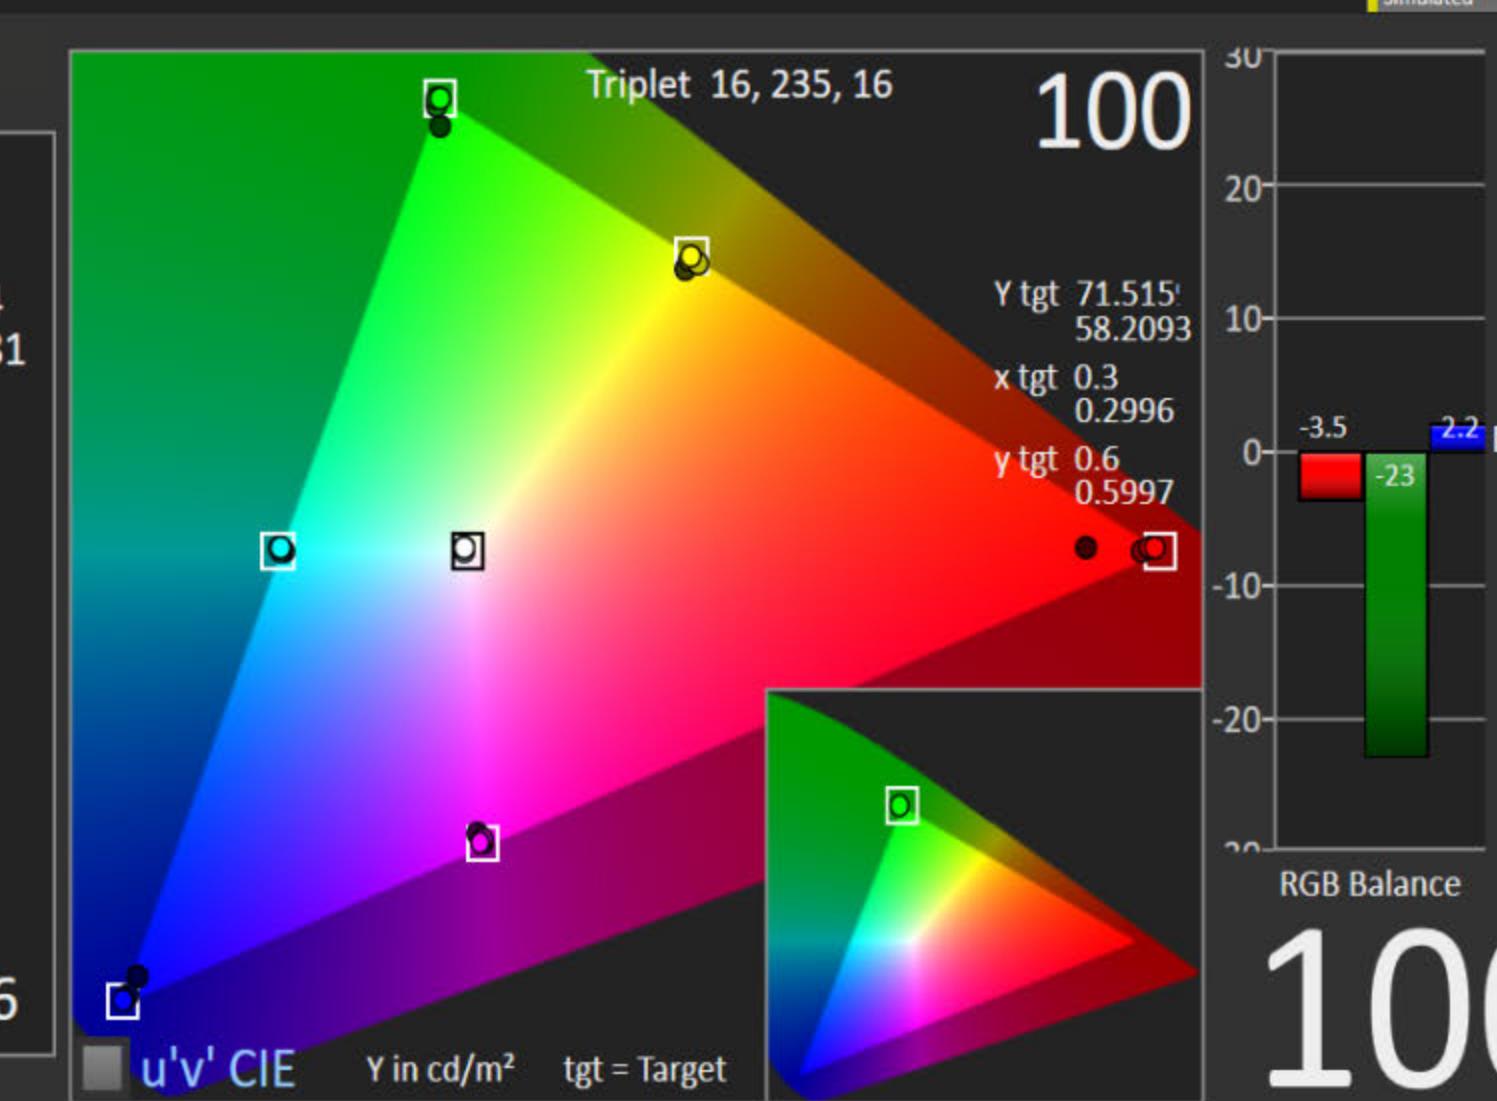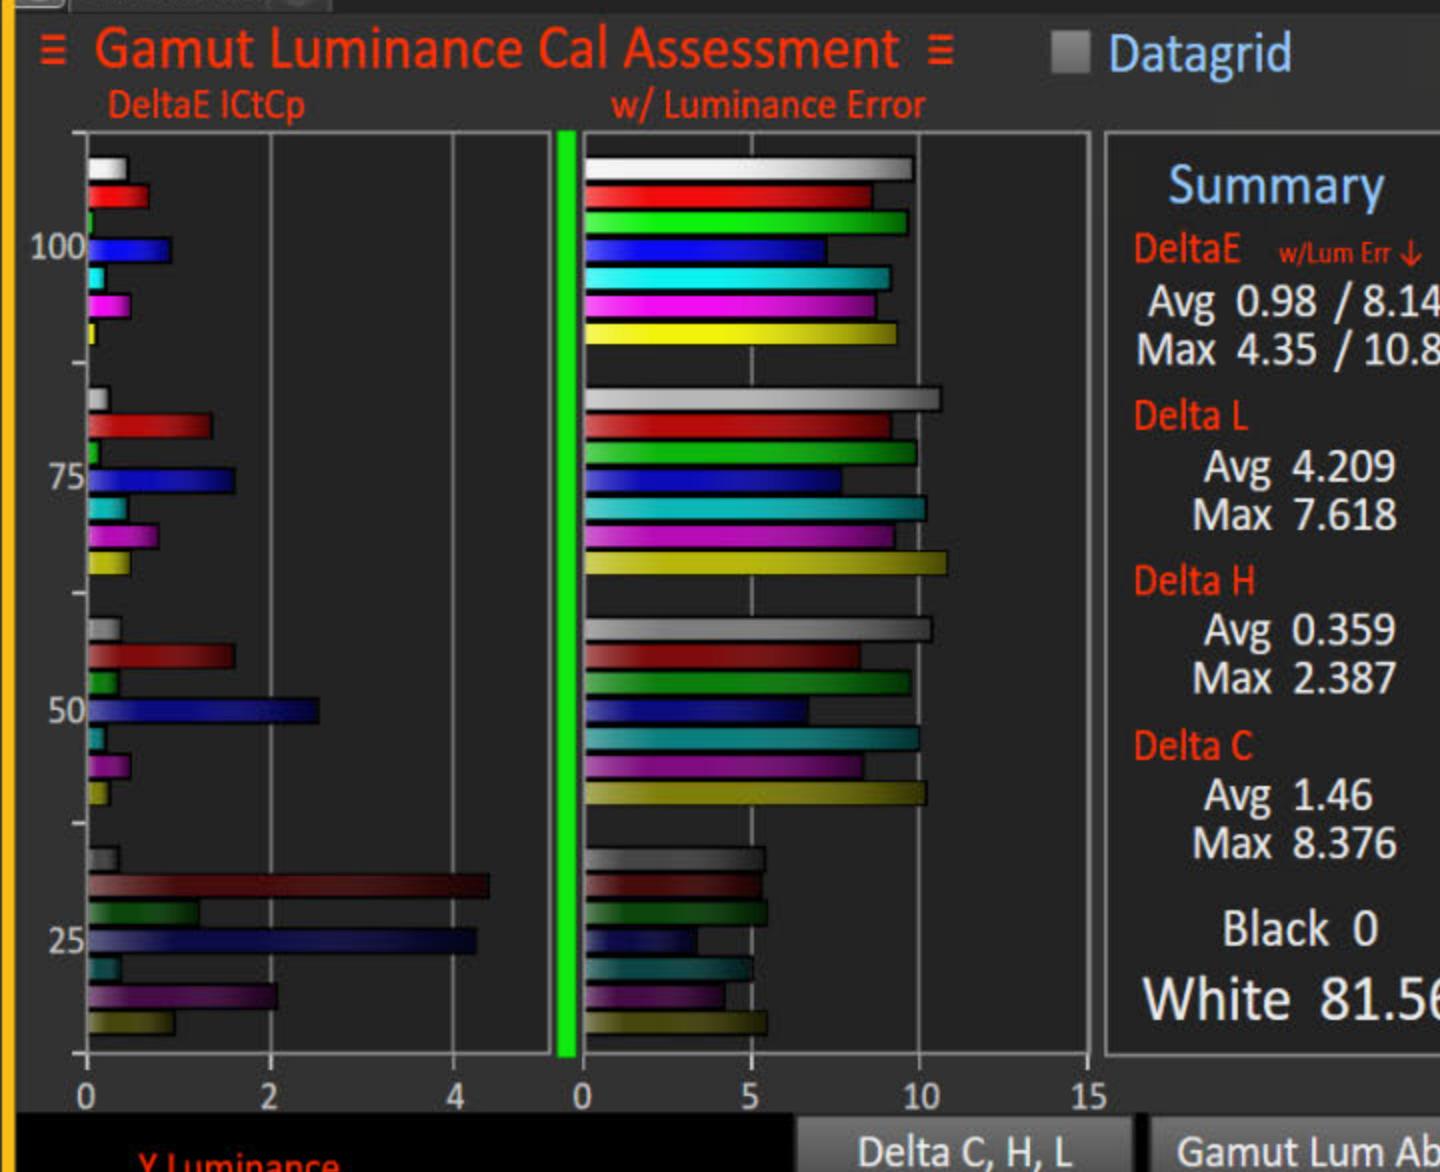

A solid black horizontal bar at the bottom of the screen, likely representing a footer or a blank space.

 Notes

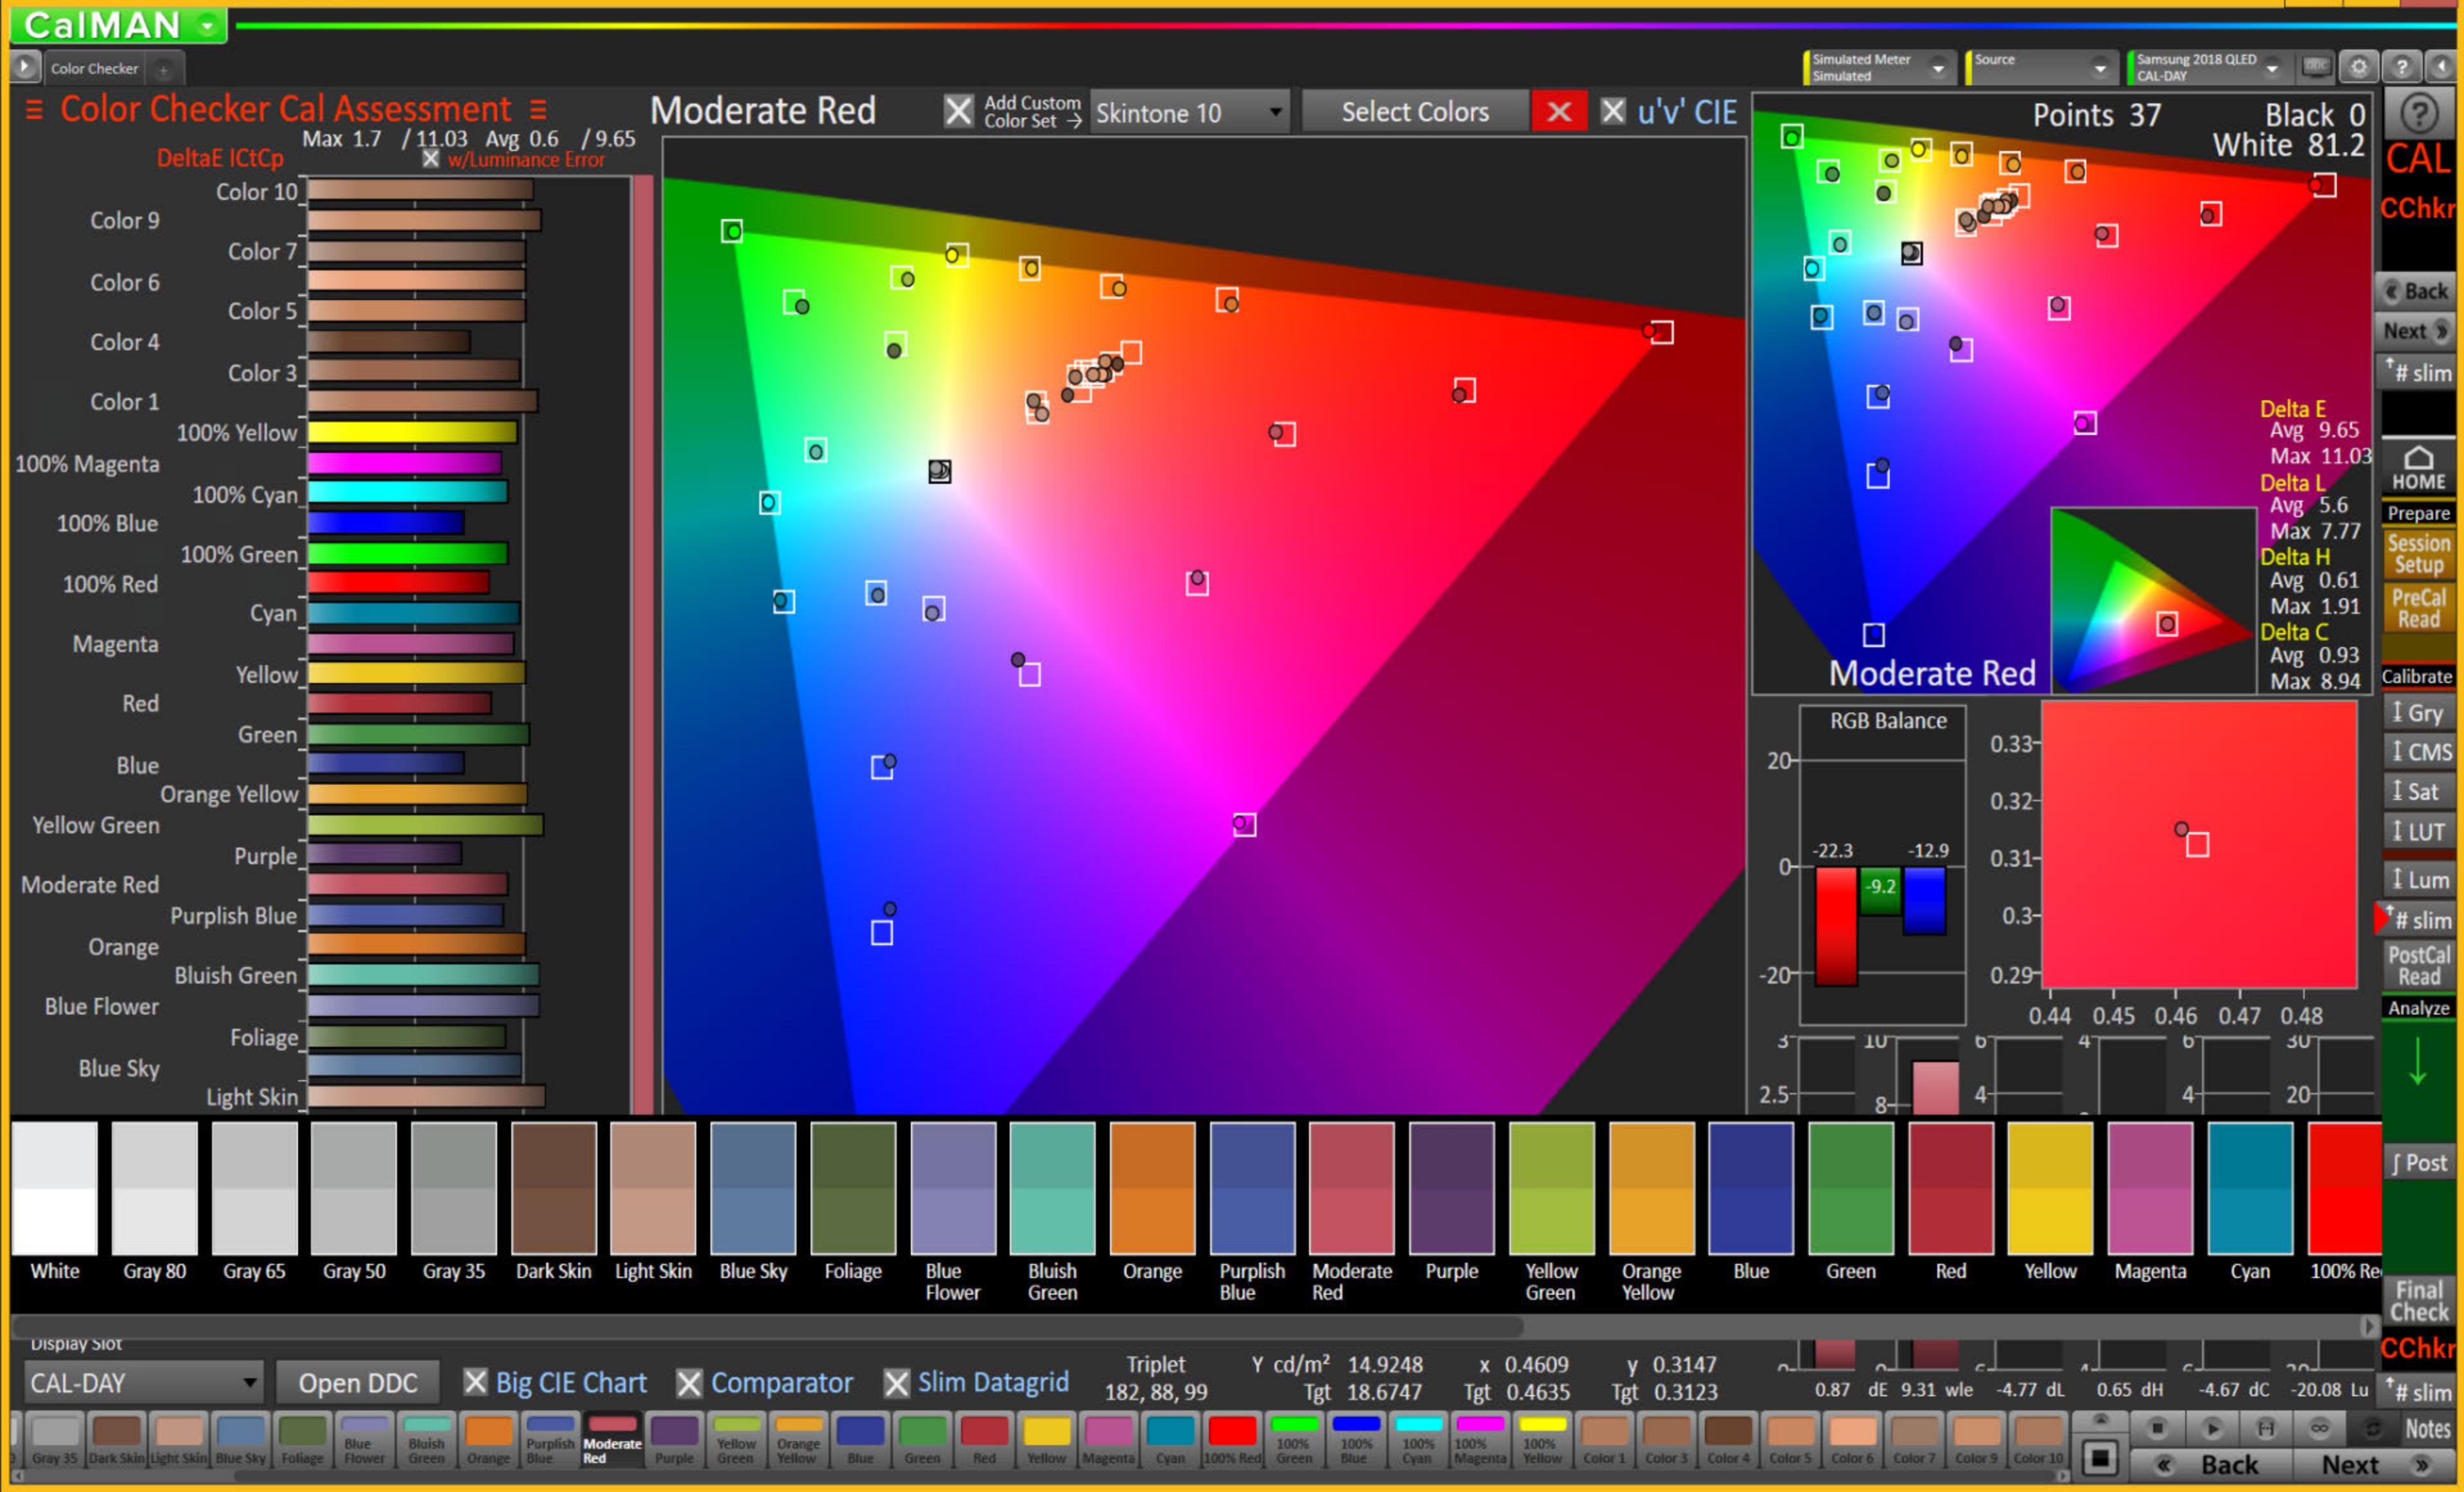

CaIMAN

Datagrid

Simulated Meter
Simulated

Source

Direct Display Control



≡ Color Checker Assessment Data ≡

Color Notes

Post-Cal Notes

CAL
CChkr

	White	Gray 80	Gray 65	Gray 50	Gray 35	Dark Skin	Light Skin	Blue Sky	Foliage	Blue Flower	Bluish Green	Orange	Purplish Blue	Moderate Red	Purple	Yellow G
RGB Triplet	235, 235, 235	213, 213, 213	196, 196, 196	176, 176, 176	152, 152, 152	115, 86, 73	182, 145, 128	97, 121, 150	93, 108, 73	128, 126, 167	101, 178, 161	202, 119, 51	80, 95, 156	182, 88, 99	95, 69, 108	152, 176
Target Y cd/m ²	100.0000	79.2590	65.0145	50.2050	35.1480	9.9716	35.6179	19.1127	13.1987	23.8604	42.4852	28.6553	11.7829	18.6747	6.5450	43.7286
Y cd/m ²	81.8139	63.8600	51.6044	39.6294	27.6990	7.9403	27.9251	14.9784	10.4486	18.6678	33.8266	22.6482	9.3353	14.8345	5.3204	34.5484
Target x:CIE31	0.3127	0.3127	0.3127	0.3127	0.3127	0.4057	0.3778	0.2491	0.3415	0.2687	0.2615	0.5141	0.2150	0.4635	0.2884	0.3773
x: CIE31	0.3121	0.3122	0.3117	0.3135	0.3130	0.4022	0.3777	0.2482	0.3363	0.2661	0.2629	0.5149	0.2163	0.4627	0.2903	0.3731
Target y:CIE31	0.3290	0.3290	0.3290	0.3290	0.3290	0.3643	0.3561	0.2656	0.4314	0.2530	0.3593	0.4095	0.1896	0.3123	0.2170	0.4951
y: CIE31	0.3290	0.3298	0.3293	0.3286	0.3302	0.3615	0.3573	0.2663	0.4288	0.2538	0.3626	0.4041	0.1905	0.3137	0.2214	0.4949
Target CCT	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	3278.9495	3931.9347	17004.8230	5258.4868	15500.1515	8916.1635	2106.8573	16532072.9677	1816.3588	23330.5377	4592.49
CCT	6535.0000	6524.0000	6557.0000	6461.0000	6479.0000	3334.0000	3943.0000	17020.0000	5396.0000	15905.0000	8766.0000	2064.0000	8642804.0000	1830.0000	19159.0000	4670.00
dE IctCp	9.6094	10.1717	10.6916	10.6687	10.3996	8.5072	10.6424	9.9461	9.0707	10.3420	10.1518	10.0820	8.9910	9.4616	7.4378	10.5473
dE IctCp LuminanceCompensated	0.1299	0.1929	0.2327	0.2101	0.1403	0.4799	0.1787	0.2370	0.7019	0.6885	0.3597	1.1183	0.2972	0.4030	0.5085	0.6536
Red PQ Diff	-0.0207	-0.0222	-0.0235	-0.0211	-0.0220	0.0264	0.0162	-0.0650	-0.0431	-0.0287	-0.1248	0.0631	-0.0582	0.0746	0.0205	-0.0452
Green PQ Diff	-0.0198	-0.0208	-0.0219	-0.0226	-0.0214	-0.0321	-0.0333	-0.0167	-0.0085	-0.0268	-0.0030	-0.0578	-0.0262	-0.0782	-0.0401	-0.0085
Blue PQ Diff	-0.0199	-0.0215	-0.0221	-0.0222	-0.0224	-0.0612	-0.0613	0.0289	-0.0835	0.0335	-0.0279	-0.2073	0.0783	-0.0566	0.0450	-0.1929
dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
dE94 C LuminanceCompensated	0.3247	0.6082	0.5482	0.4977	0.4468	0.6884	0.0110	0.0639	0.4020	0.4842	0.4847	0.5819	0.3354	0.5315	1.3943	0.4121
dE94 H LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.4998	0.4706	0.5238	1.1227	1.1726	0.9515	2.2495	0.1790	0.4365	0.1337	1.4669
Signed dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Signed dE94 C LuminanceCompensated	0.3247	0.6082	0.5482	0.4977	0.4468	-0.6884	-0.0110	-0.0639	-0.4020	-0.4842	0.4847	-0.5819	-0.3354	-0.5315	-1.3943	-0.4121
Signed dE94 H LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	-0.4998	0.4706	-0.5238	1.1227	-1.1726	-0.9515	-2.2495	0.1790	0.4365	0.1337	1.4669

Analyze



DTA

↑ Asmt

Notes ↵

CaIMAN

Datagrid 1 Datagrid 2 +

Simulated Meter Simulated Source Direct Display Control ?

≡ Color Checker Assessment Data Slim 2 ≡

Color Notes

Post-Cal Notes

CAL

	White	Gray 80	Gray 65	Gray 50	Gray 35	Dark Skin	Light Skin	Blue Sky	Foliage	Blue Flower	Bluish Green	Orange	Purplish Blue	Moderate Red	Purple	Yellow Green	Orange Yellow	Blue	Green	Red	Yellow	Ma
Red PQ Diff	-0.0207	-0.0222	-0.0235	-0.0211	-0.0220	0.0264	0.0162	-0.0650	-0.0431	-0.0287	-0.1248	0.0631	-0.0582	0.0746	0.0205	-0.0452	0.0360	-0.0567	-0.1204	0.0931	0.0143	
Green PQ Diff	-0.0198	-0.0208	-0.0219	-0.0226	-0.0214	-0.0321	-0.0333	-0.0167	-0.0085	-0.0268	-0.0030	-0.0578	-0.0262	-0.0782	-0.0401	-0.0085	-0.0364	-0.0316	0.0000	-0.1045	-0.0245	
Blue PQ Diff	-0.0199	-0.0215	-0.0221	-0.0222	-0.0224	-0.0612	-0.0613	0.0289	-0.0835	0.0335	-0.0279	-0.2073	0.0783	-0.0566	0.0450	-0.1929	-0.2330	0.1119	-0.1216	-0.0898	-0.3012	
ΔE 1994 L*±	-7.5074	-7.4585	-7.4475	-6.9901	-6.2479	-3.9331	-6.4060	-5.2143	-4.4253	-5.6514	-6.3794	-5.7682	-4.2469	-4.8978	-3.1193	-6.6511	-6.4352	-2.6394	-5.7331	-3.7400	-6.9700	
ΔE 1994 Sat:±	0.3247	0.6082	0.5482	0.4977	0.4468	-2.1433	-1.6726	-1.7606	-2.3931	-2.6544	-1.8582	-5.6204	-3.6285	-4.0854	-3.5814	-5.2374	-6.3819	-7.0764	-6.1094	-7.2286	-6.4182	
ΔE 1994 Hue:±	0.0000	0.0000	0.0000	0.0000	0.0000	-0.5191	0.4901	-0.5456	1.1673	-1.2216	-0.9883	-2.3395	0.1861	0.4536	0.1384	1.5257	-0.1405	-0.7258	0.0529	0.2784	-0.8165	
Signed dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Signed dE94 C LuminanceCompensated	0.3247	0.6082	0.5482	0.4977	0.4468	-0.6884	-0.0110	-0.0639	-0.4020	-0.4842	0.4847	-0.5819	-0.3354	-0.5315	-1.3943	-0.4121	-1.3235	-3.6982	-1.7918	-3.3155	-0.7557	
Signed dE94 H LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	-0.4998	0.4706	-0.5238	1.1227	-1.1726	-0.9515	-2.2495	0.1790	0.4365	0.1337	1.4669	-0.1353	-0.7045	0.0507	0.2690	-0.7868	

↑ Asmt

HOME
Prepare

Calibrate

↑ Asmt

↑ Data1

Analyze

↓

DTA

↑ Asmt

*Datagrid 1 Notes ↵

CaIMAN


3D Color Cube LUT 3D Cube LUT Minimal +

Simulated Meter Simulated Source Direct Display Control ?

≡ 3D Color Cube LUT Calibration - Minimal ≡

Go to Full 3D LUT

Datagrid



CAL

3dLUT

Mnml

Back

Next >



HOME

Prepare

Session Setup


PreCal Read

Calibrate

↑ Gry

↑ CMS

↑ Sat



↓ Lum

↓ CCK

PostCal Read

Analyze






↓



↑ Chrt

Final Check

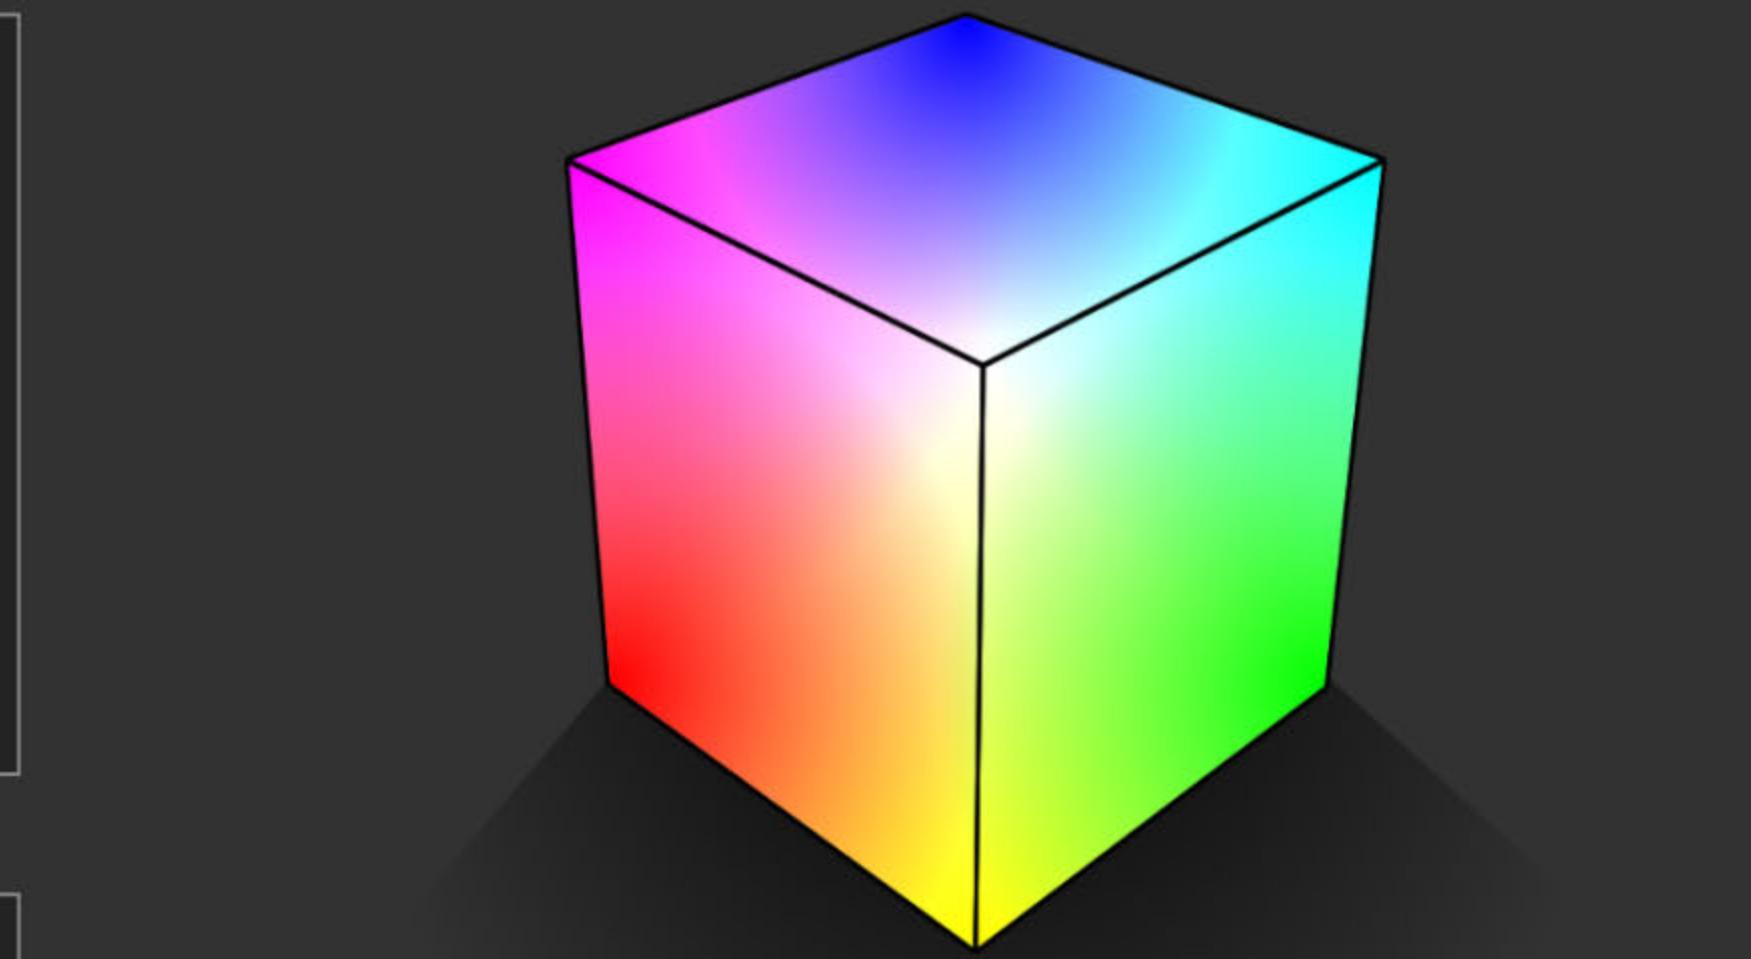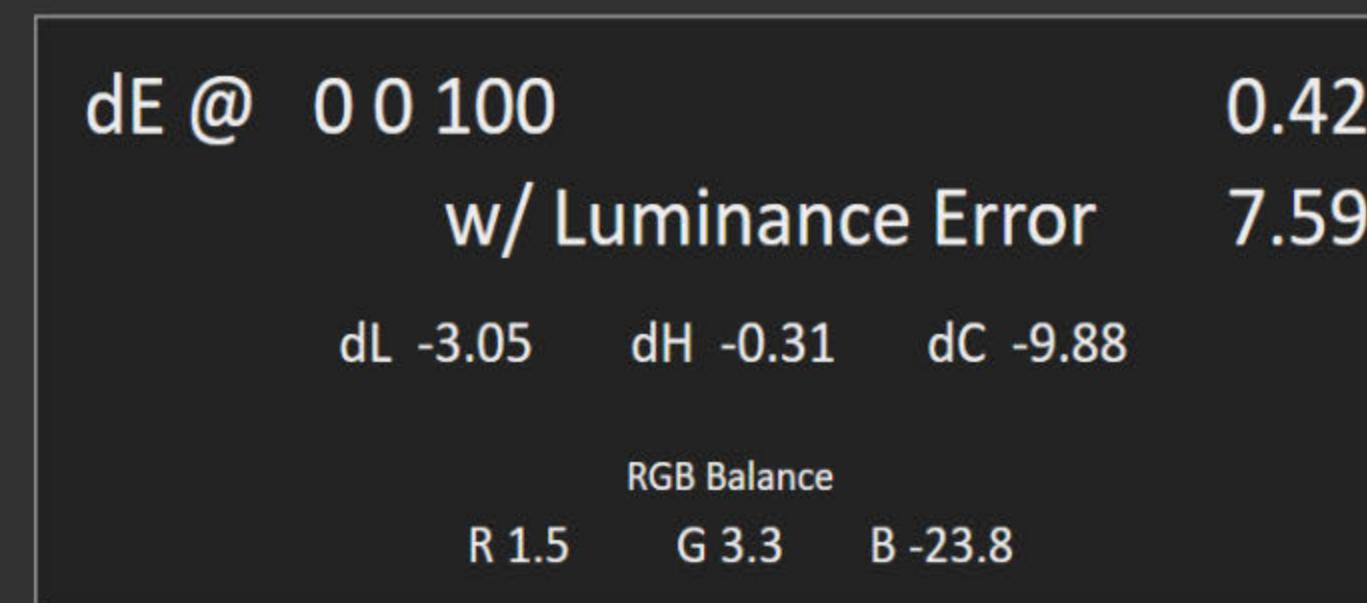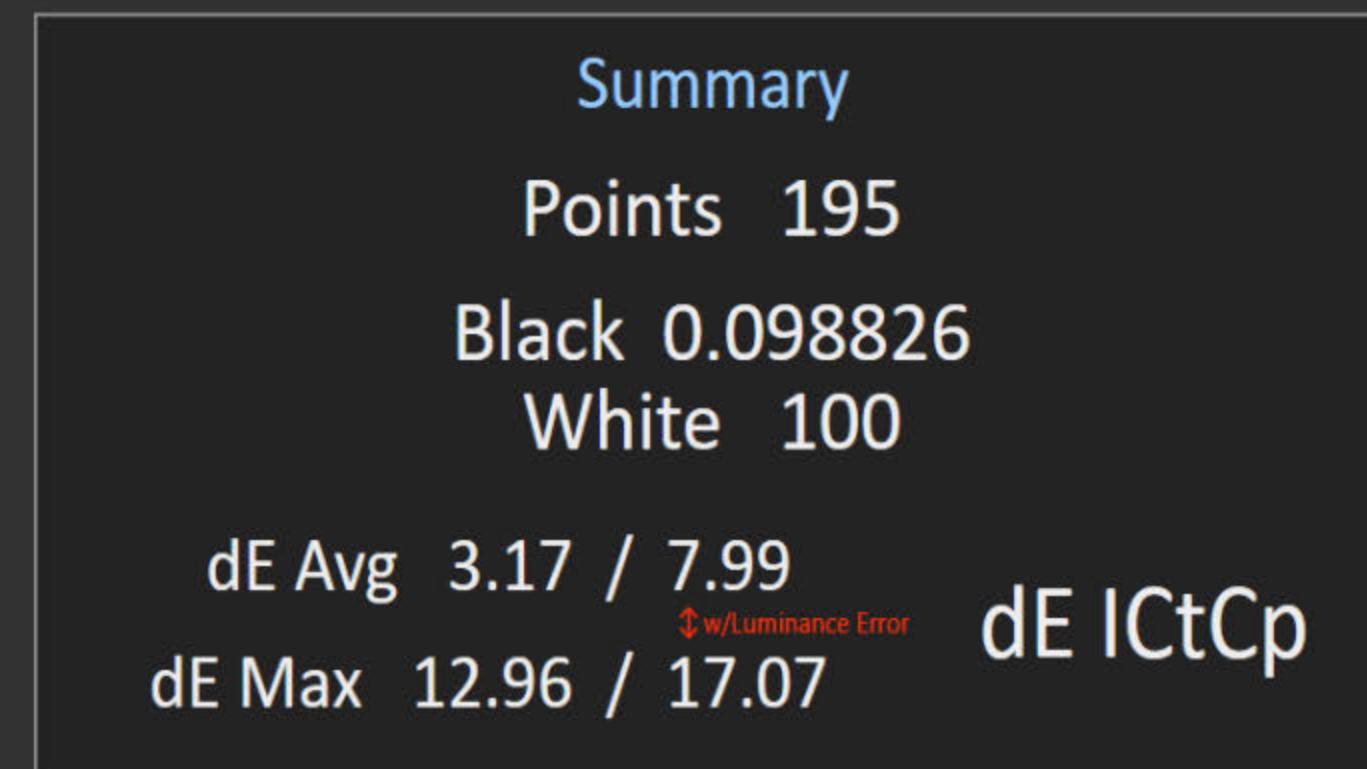

Red Green Blue Cyan Magenta Yellow White



Read Cube Ramp

Go to Charts

View charts in the Analysis section

Luminance Level Points

15 Points per side, SMPTE (0-100)

Inner Data Points



Display Slot



Selected LUT



CaIMAN

 Post-Cal Readings

Post-Calibration Readings

7/28/2018 Calibration

1

The graph displays a series of vertical bars representing discrete data points, likely gamma values, across a range from 0 to 20. A continuous yellow line is drawn above the bars, starting at approximately 1.5 for x=0, rising to about 2.2 at x=5, and remaining relatively flat thereafter.

x	Bar Value	Line Value
0	~1.5	~1.5
1	~1.5	~1.7
2	~1.5	~1.7
3	~2.2	~2.2
4	~2.2	~2.2
5	~2.2	~2.2
6	~2.2	~2.2
7	~2.2	~2.2
8	~2.2	~2.2
9	~2.2	~2.2
10	~2.2	~2.2
11	~2.2	~2.2
12	~2.2	~2.2
13	~2.2	~2.2
14	~2.2	~2.2
15	~2.2	~2.2
16	~2.2	~2.2
17	~2.2	~2.2
18	~2.2	~2.2
19	~2.2	~2.2
20	~2.2	~2.2

1 Grayscale

Grayscale Value	Frequency
0	~28
1	~15
2	~10
3	~5
4	~3
5	~2
6	~1
7	~1
8	~1
9	~1
10	~1
11	~1
12	~1
13	~1
14	~1
15	~1

2 Saturation Sy

Cal Day 300 nits Post-Cal Reading

Contrast
Brightness
Backlight





TV Gamma
Setup Colors
Values Tint

Re
Gain
Cut

Green Blue

↗ Note

Display Slot
Custom

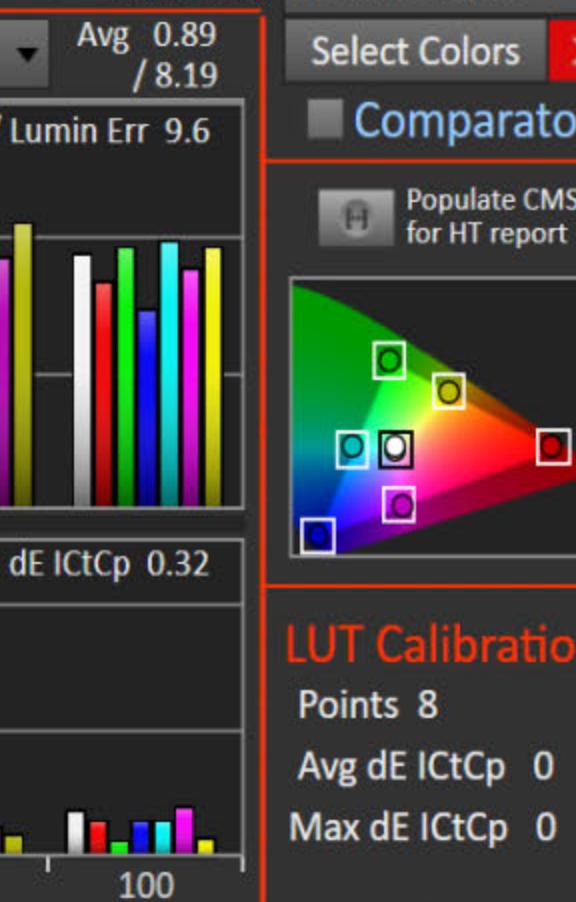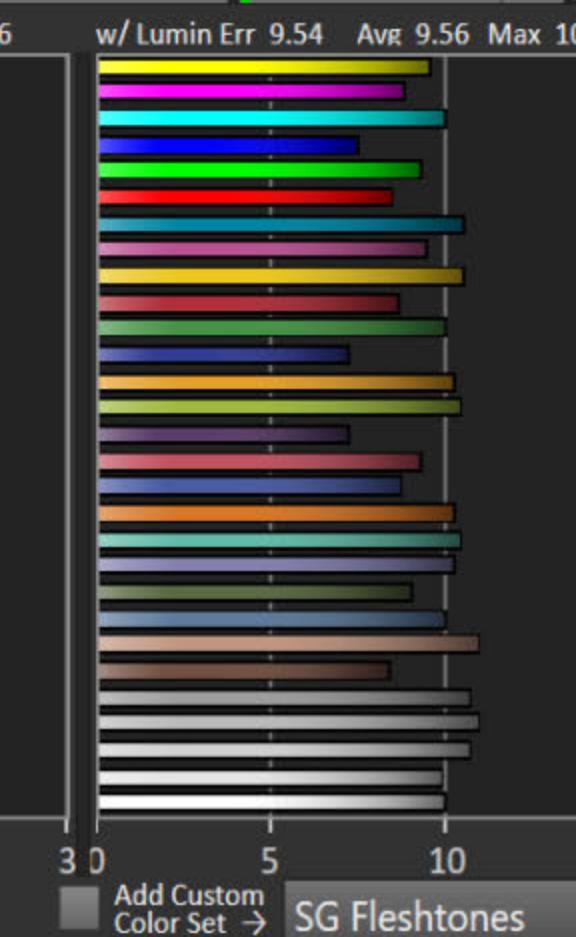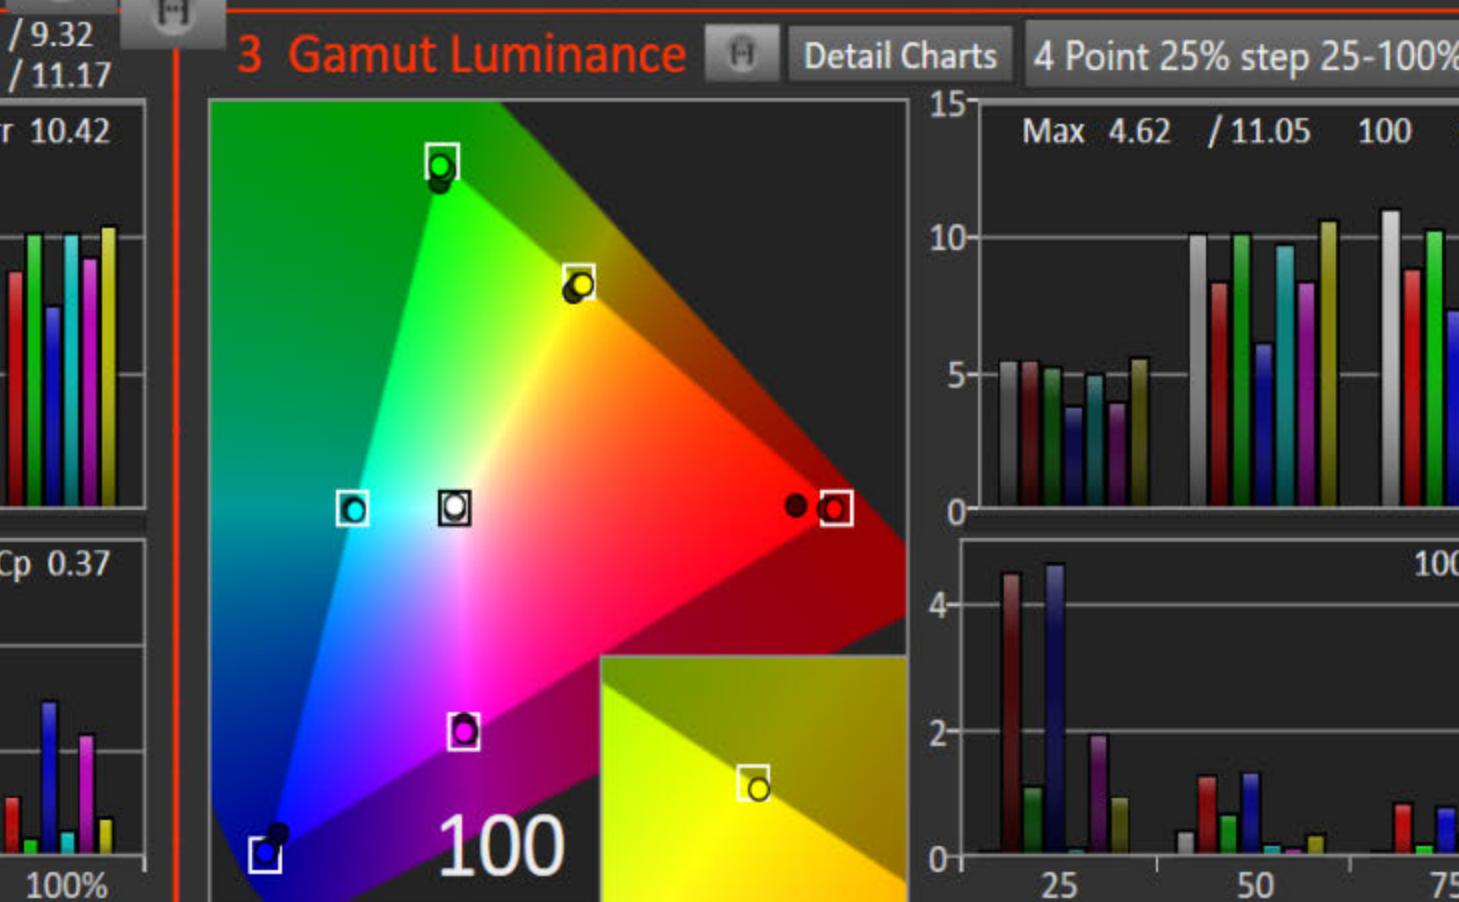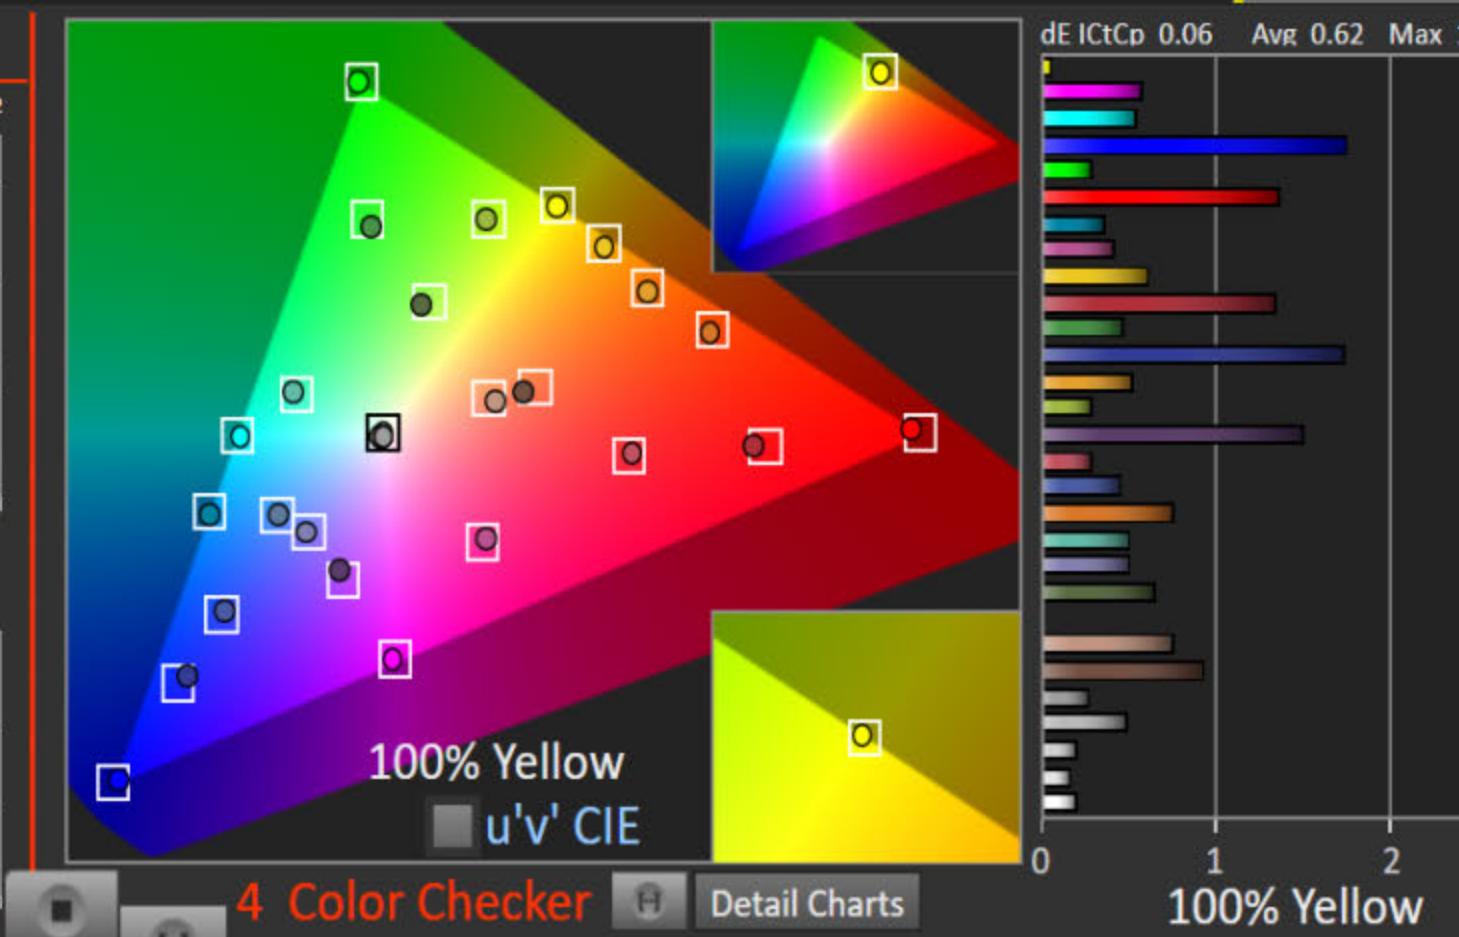


0.98
CAL
PstCal
Read
« Back
Next »
PreCal
↑ Read


HOME
Prepare
Session
Setup
PreCal
Read
15
Calibrate

X ↑ Gry
r ↑ CMS
↑ Sat
↑ LUT
↑ Lum
↑ CCK
PreCal
↑ Read
Analyze
ʃ Gry
ʃ Sat
ʃ Lum
ʃ CCK
ʃ LUT

Final
Check

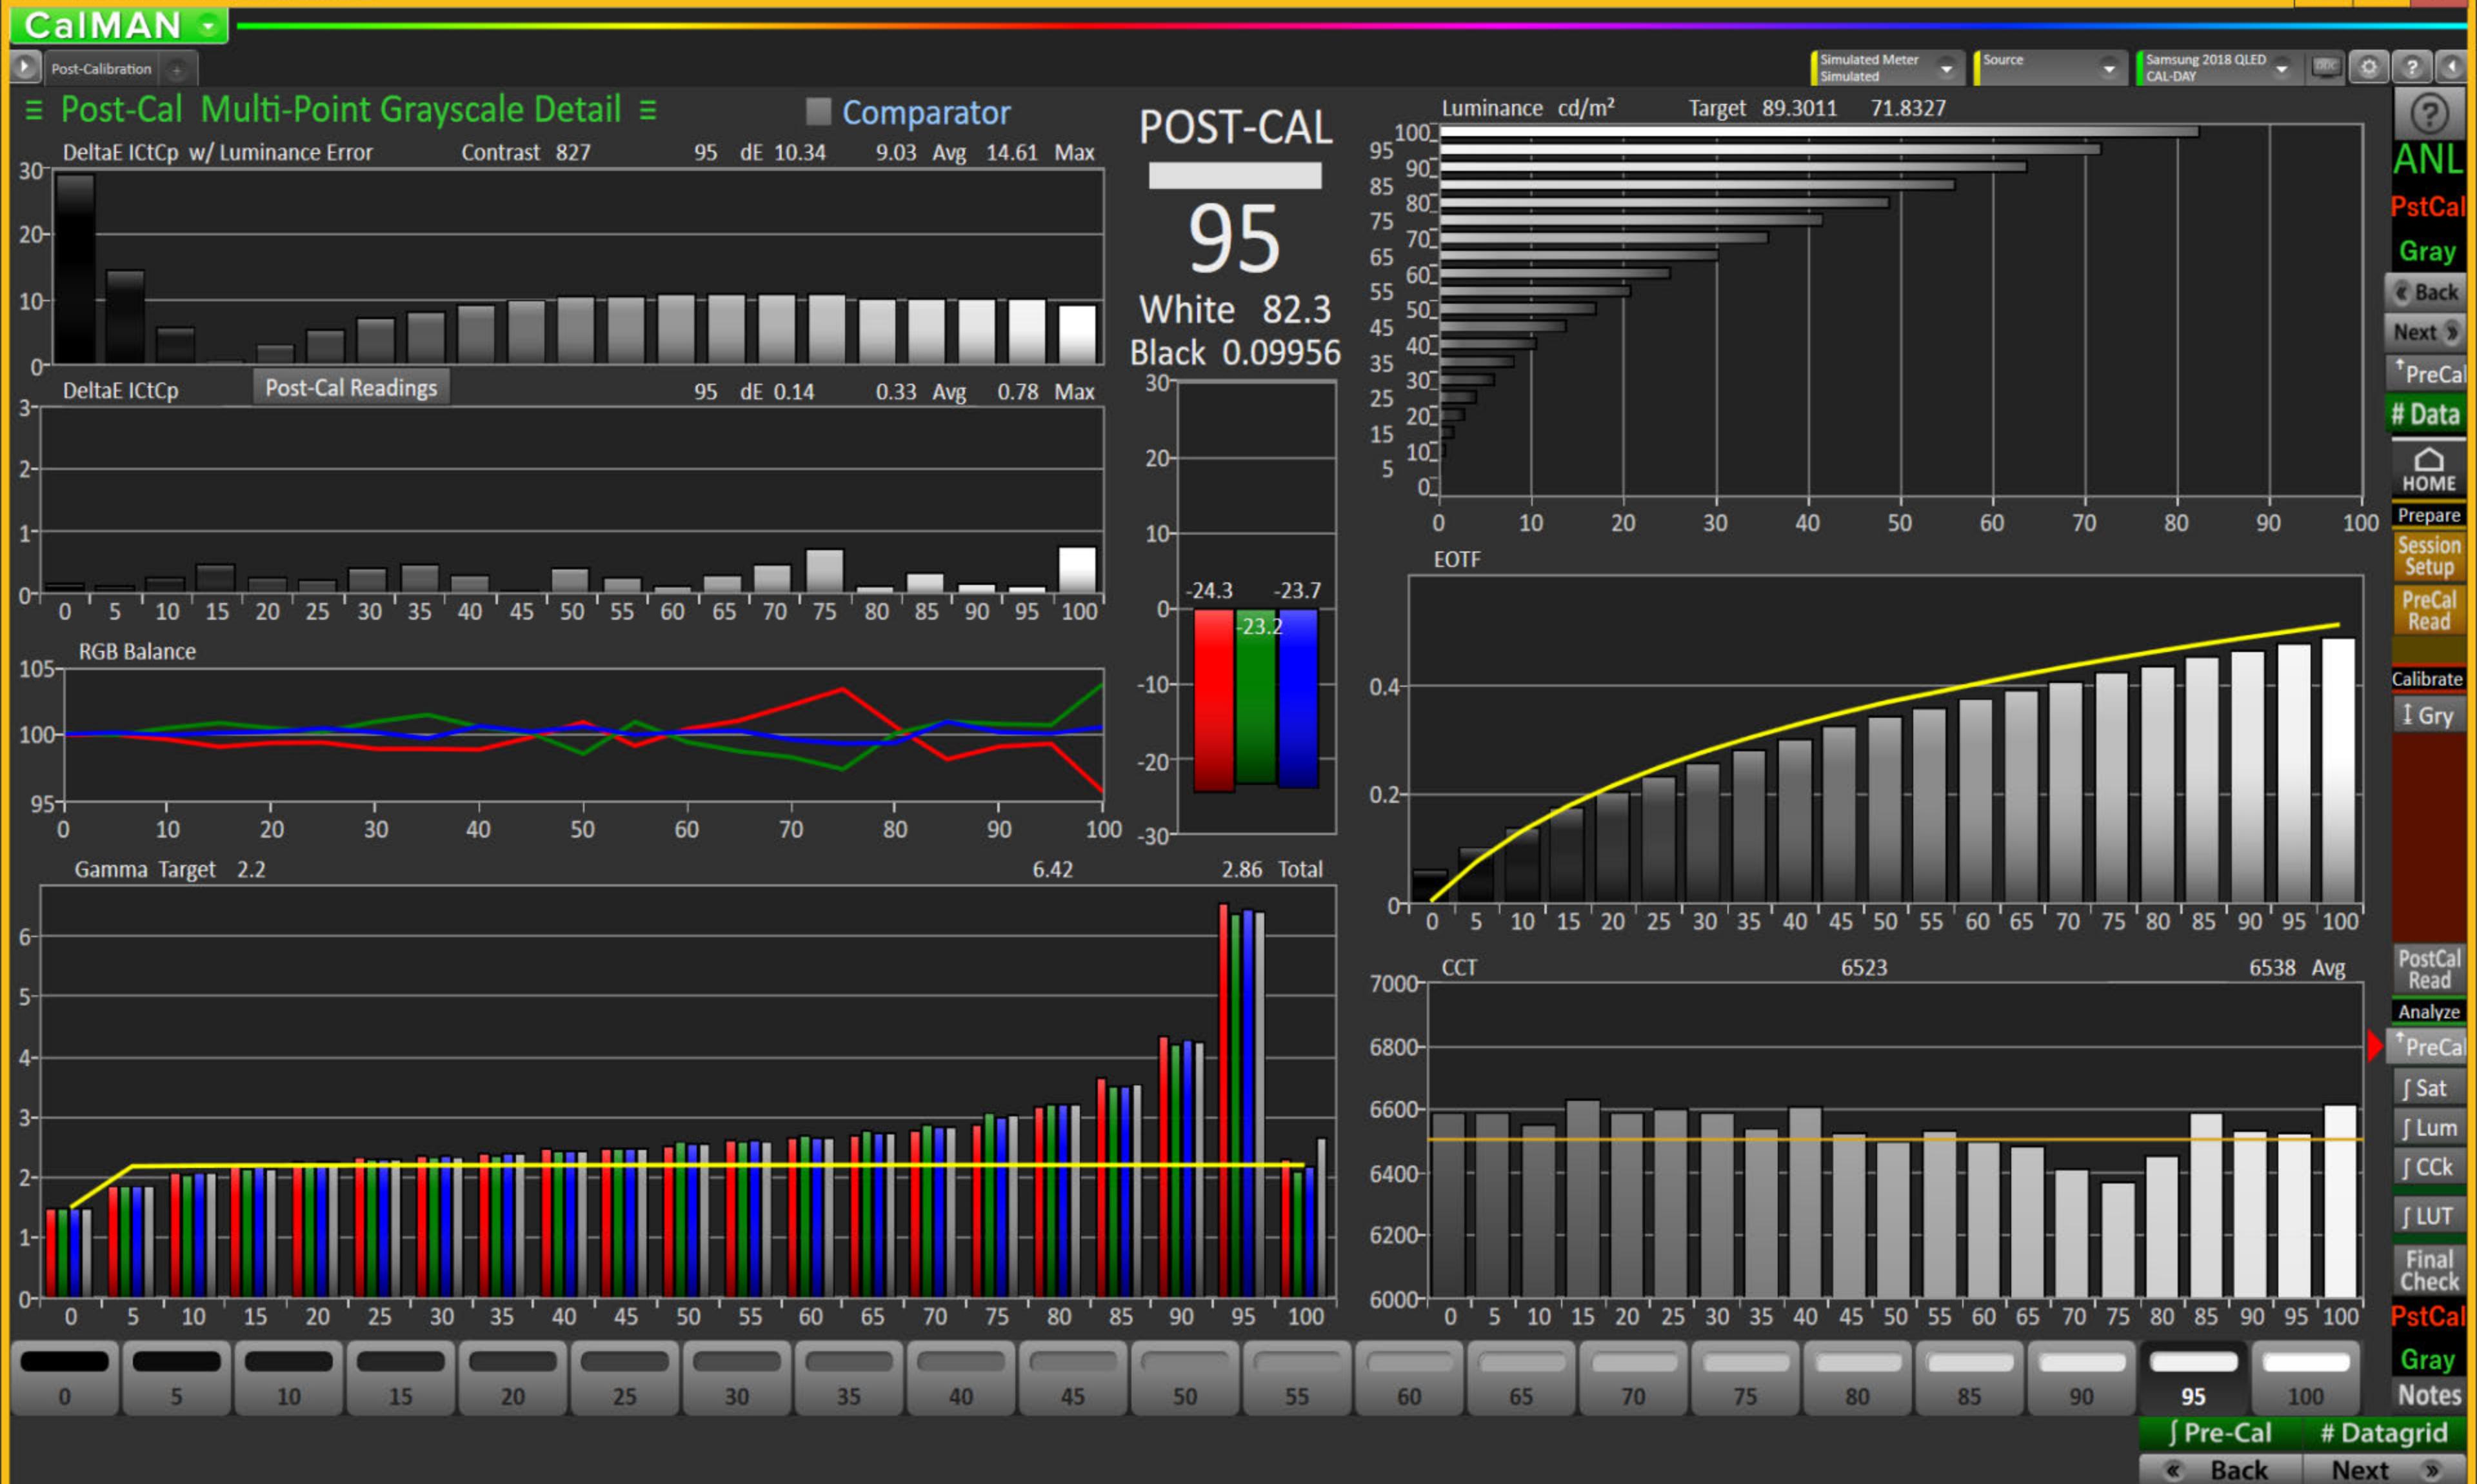







CaIMAN

Post-Calibration

 Simulated Meter
Simulated
Source
Samsung 2018 QLED
CAL-DAY
DIC
Settings
Help
Back
Next
PreCal
Data

≡ Post-Cal Saturation Sweeps Detail ≡

Comparator

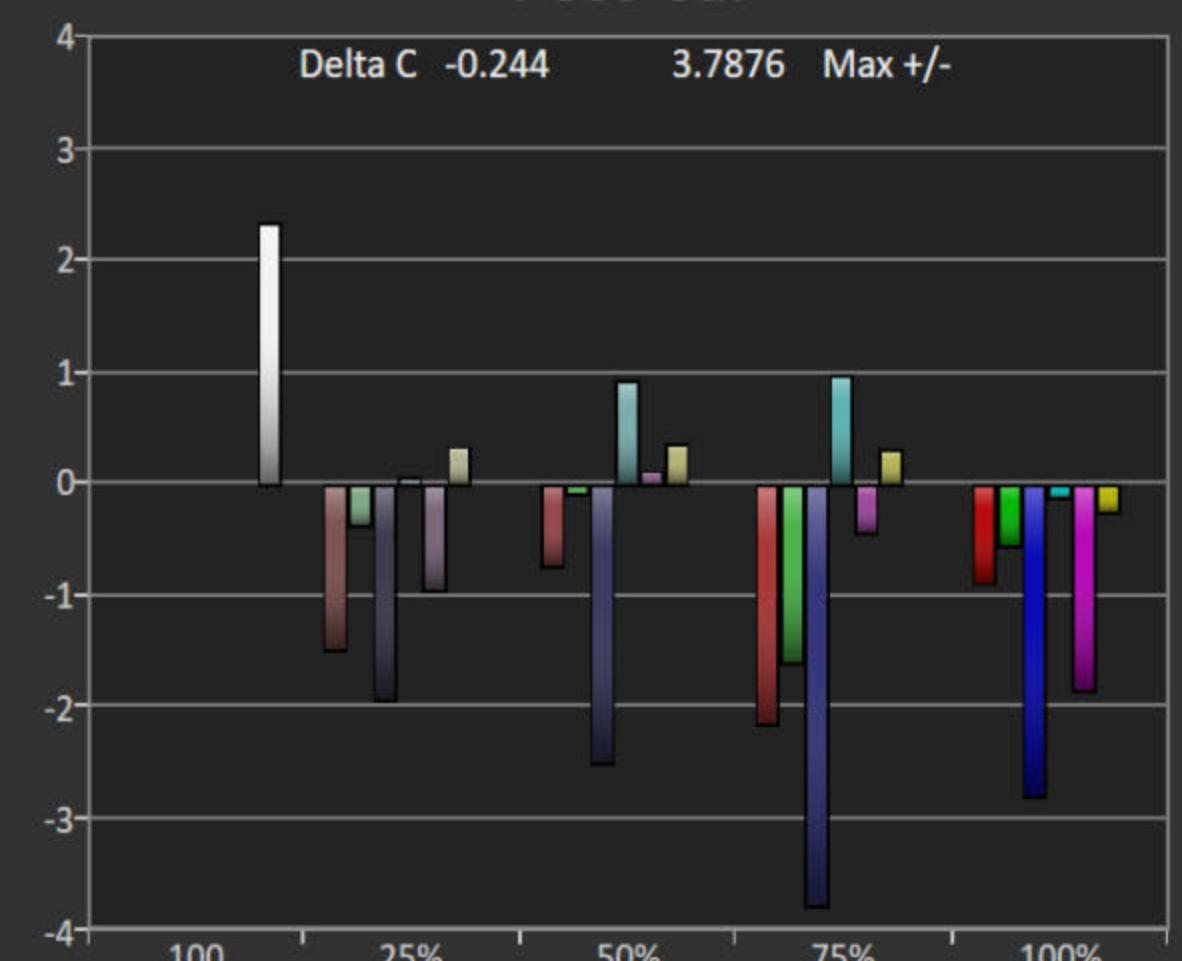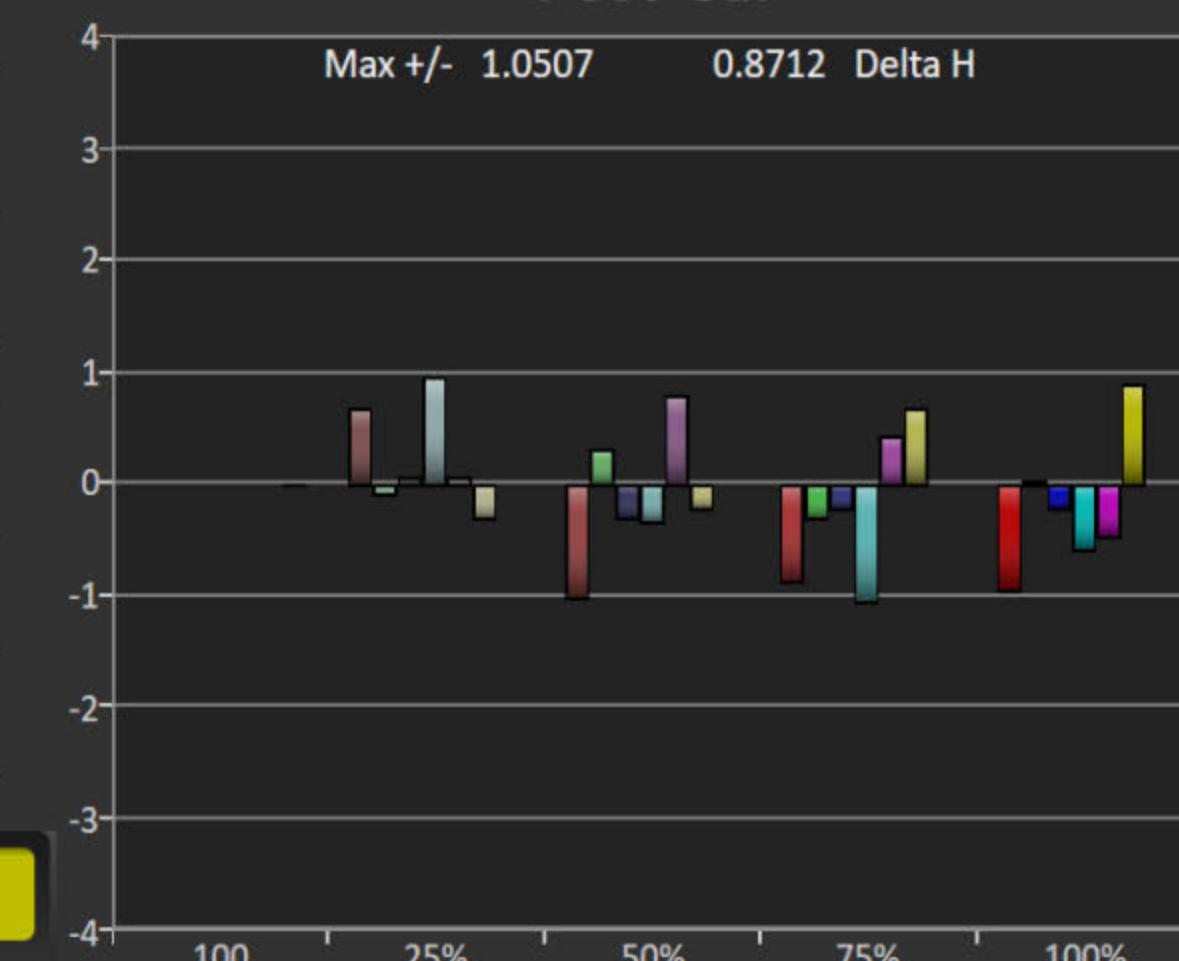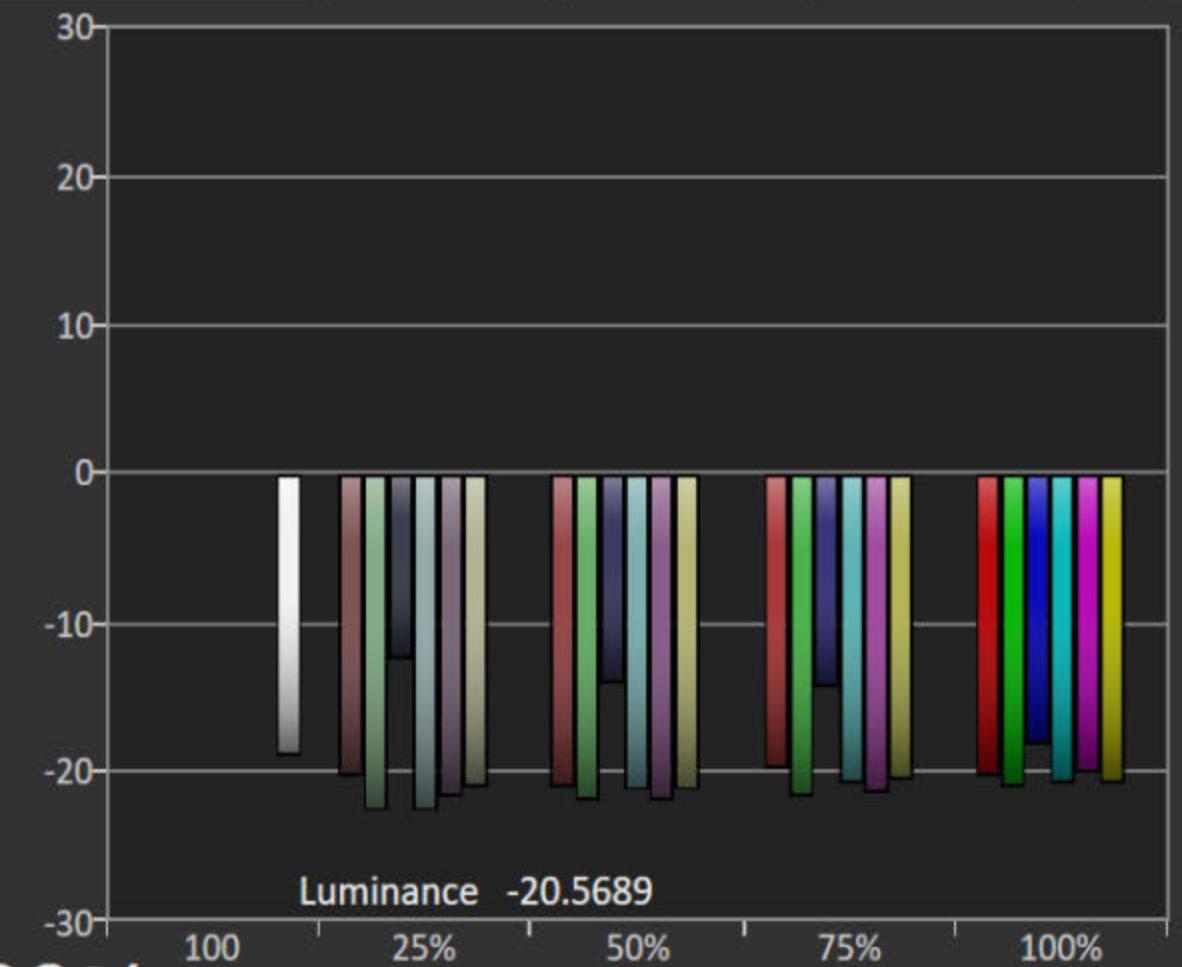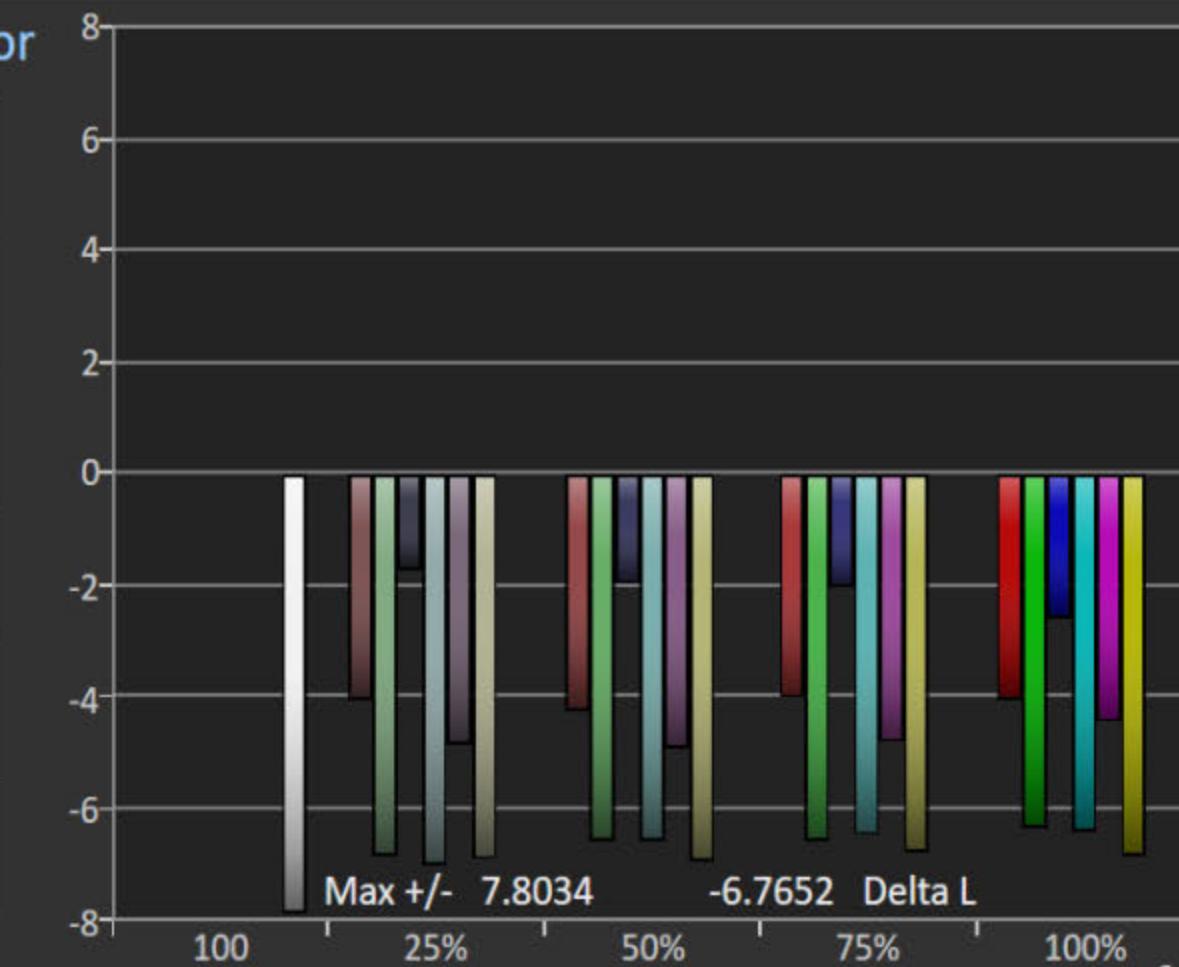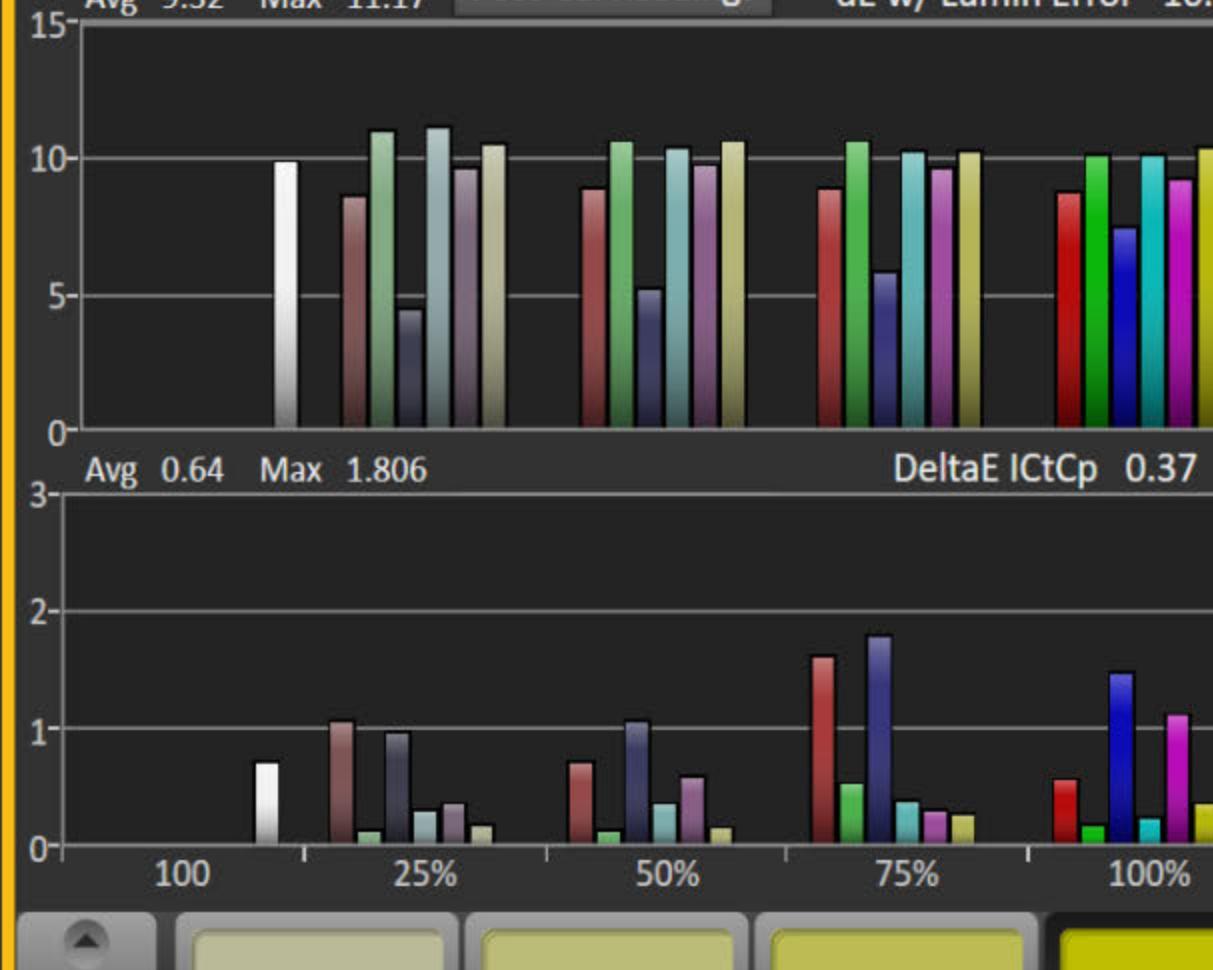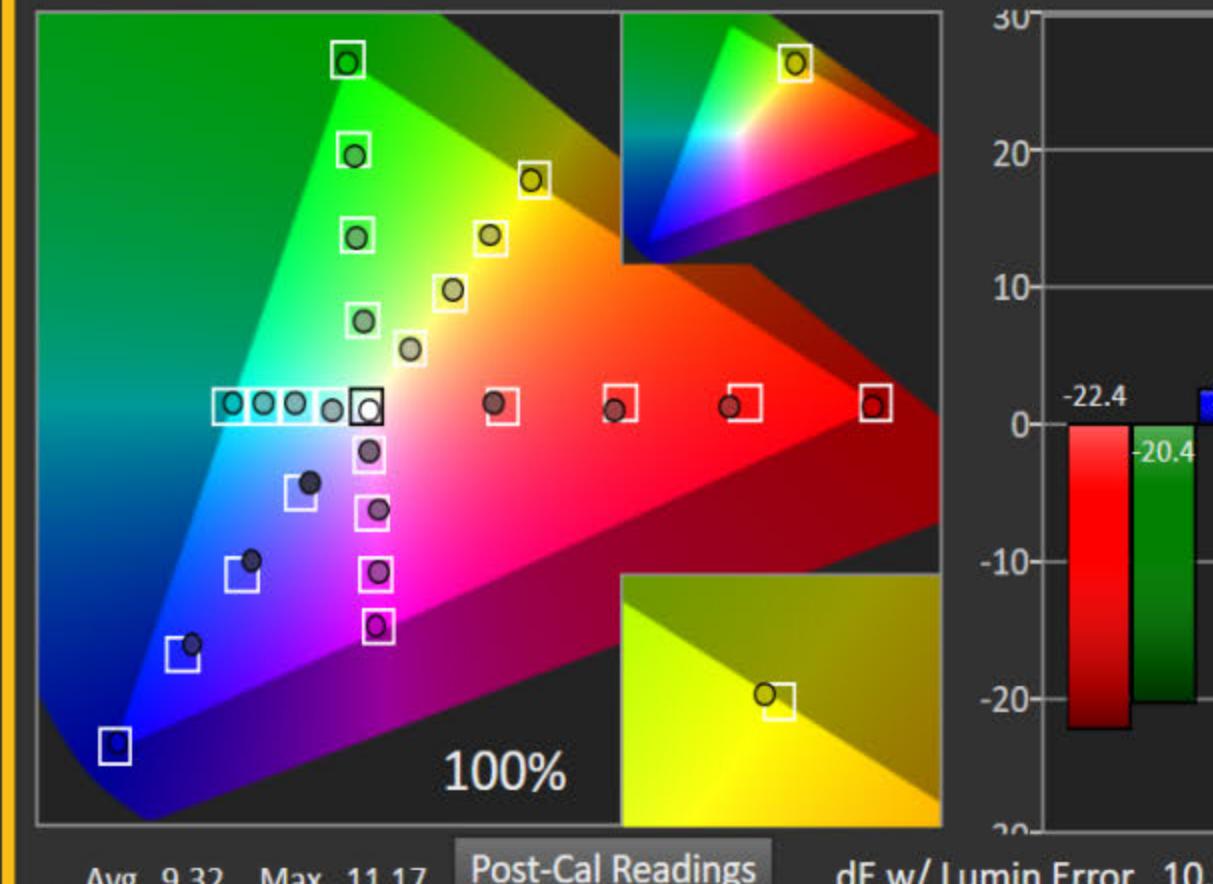

25% 50% 75% 100%

 # Pre-Cal # Datagrid
Back Next

 ANL
PstCal
Satur
Back
Next
PreCal
Data
HOME
Prepare
Session Setup
PreCal Read
Calibrate
Sat
PostCal Read
Analyze
∫ Gry
↑ PreCal
∫ Lum
∫ CCk
∫ LUT
Final Check
PstCal
Satur
Notes






CaIMAN

Post-Calibration

 Simulated Meter
Simulated
Source
Samsung 2018 QLED
CAL-DAY
DIC
Settings
Help
Back
Next
PreCal
Data
HOME
Prepare
Session Setup
PreCal Read
Calibrate
Lum
PostCal Read
Analyze
ʃ Gry
ʃ Sat
↑ PreCal
ʃ CCk
ʃ LUT
Final Check
PstCal
Lumi
Notes
ʃ Pre-Cal
Datagrid
Back
Next

≡ Post-Cal Gamut Luminance Detail ≡

Comparator

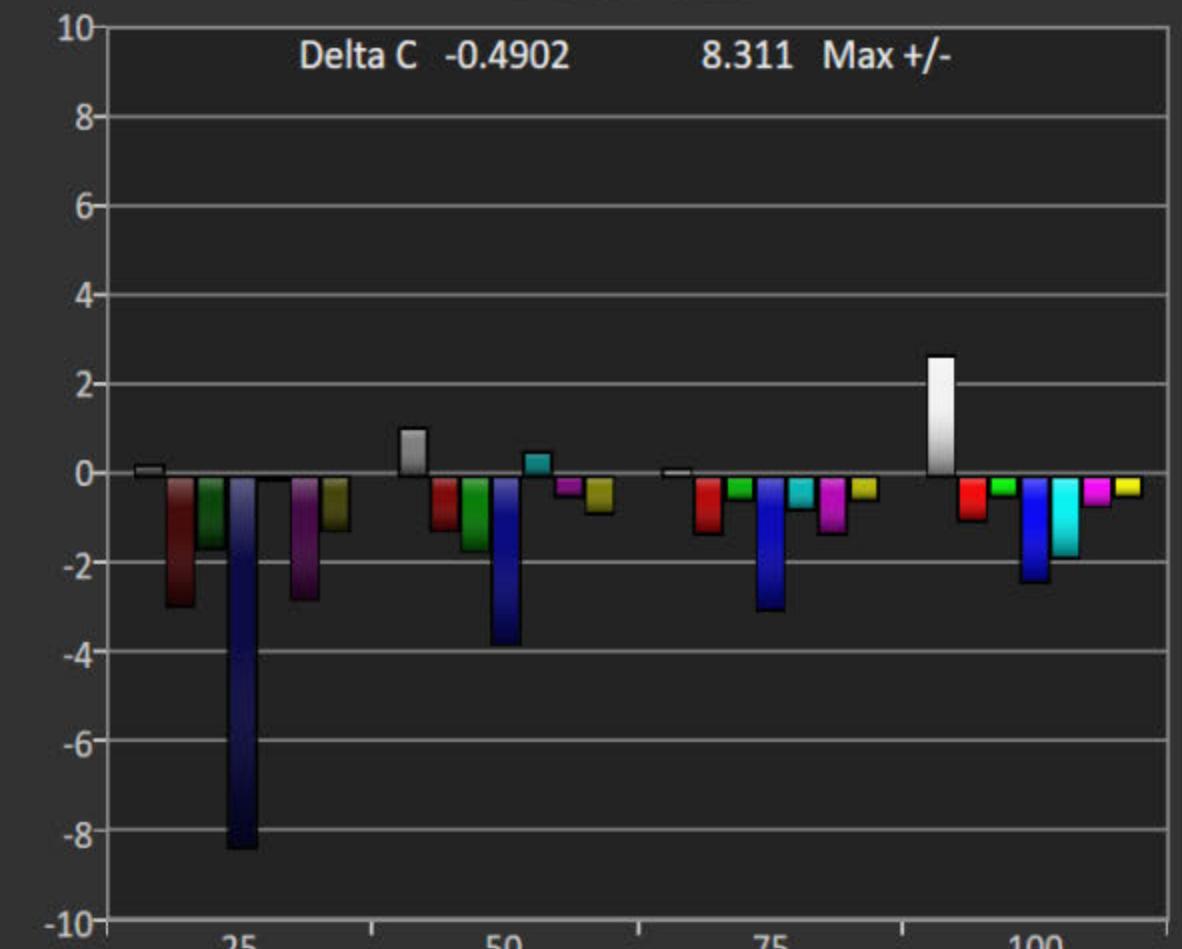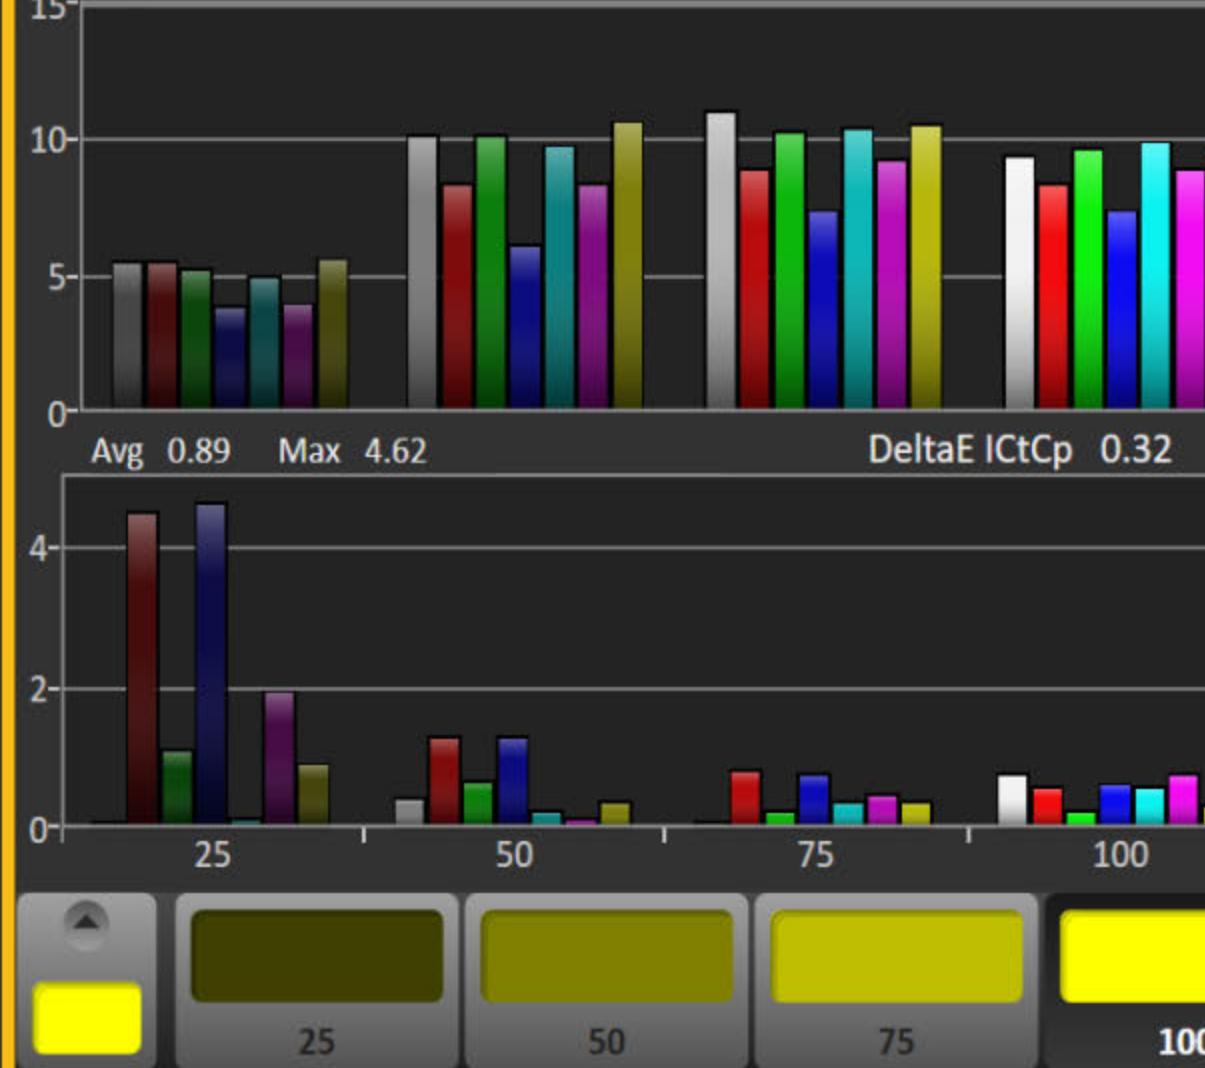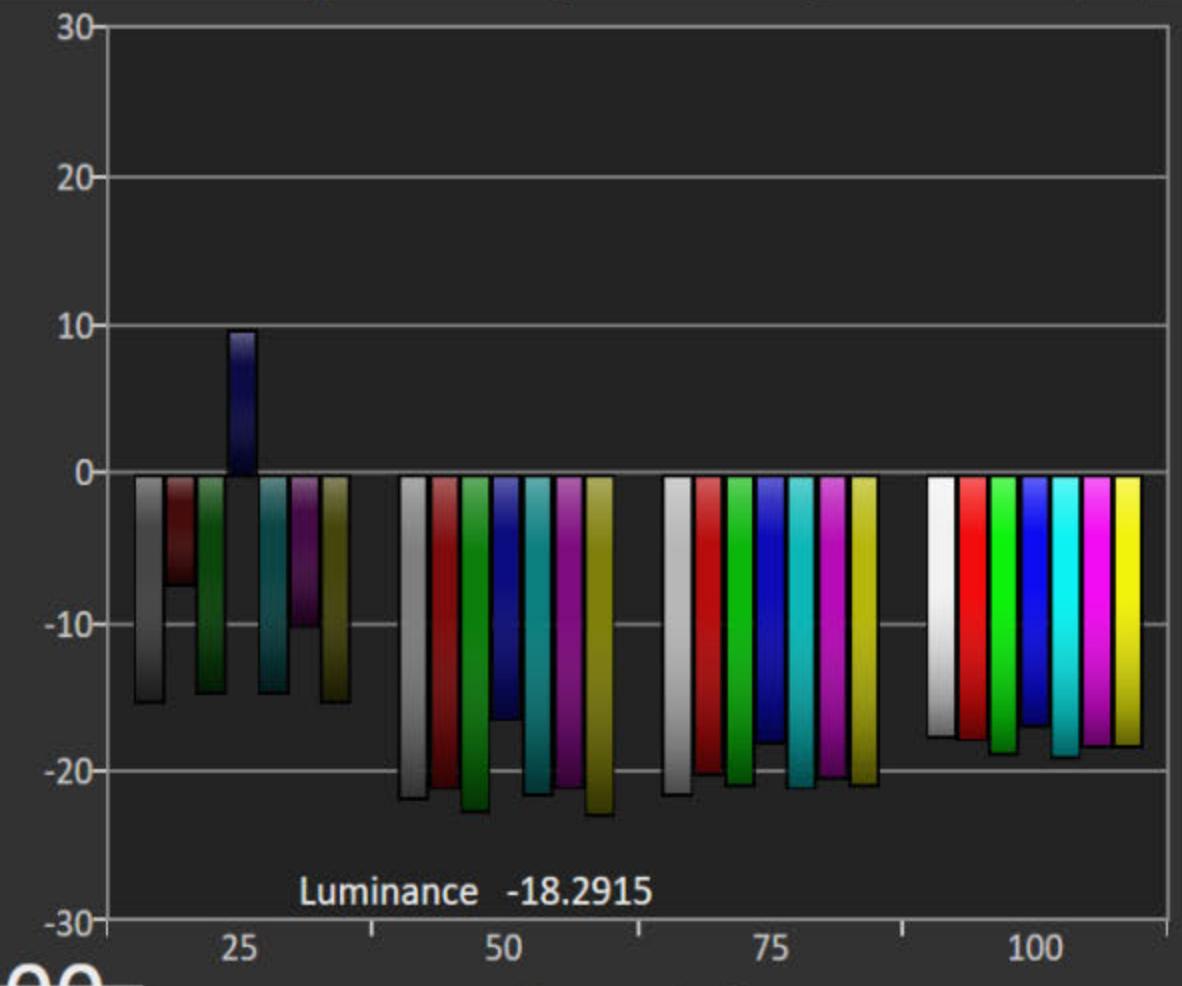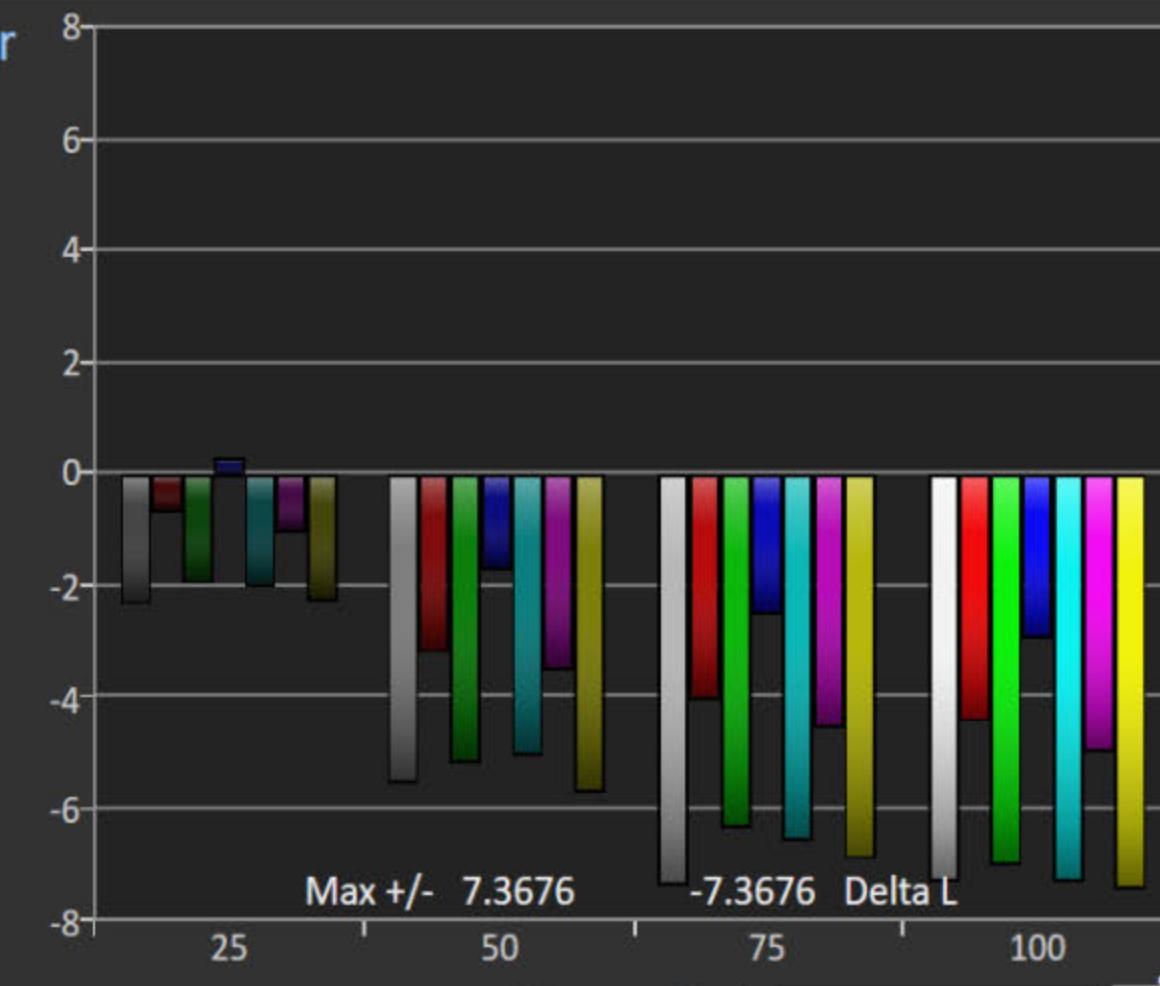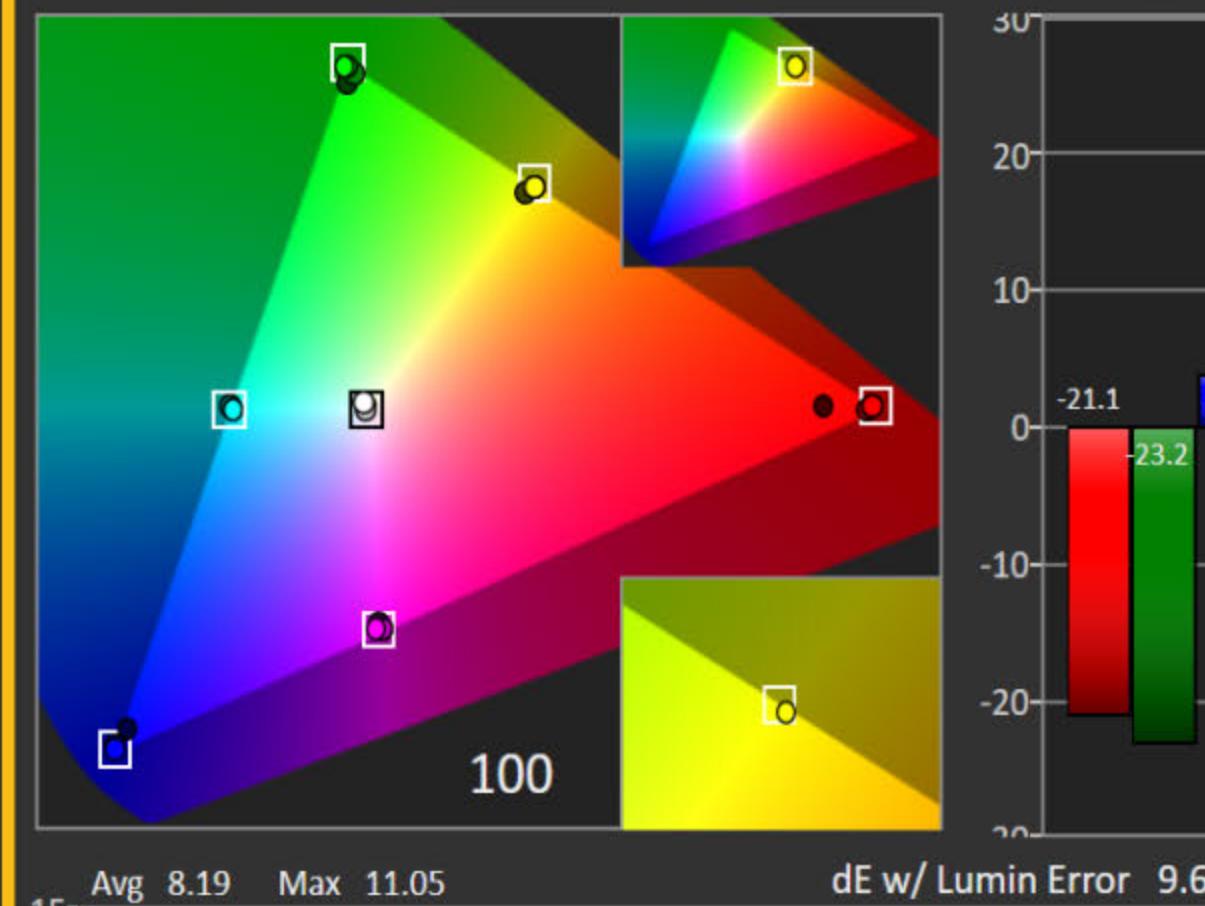
 # Datagrid
Back
Next





CaIMAN

Delta DeltaL Lminance DeltaE DeltaH DeltaC


Simulated Meter Source Direct Display Control

≡ 3D Color Cube LUT Full Calibration Detail 1 ≡

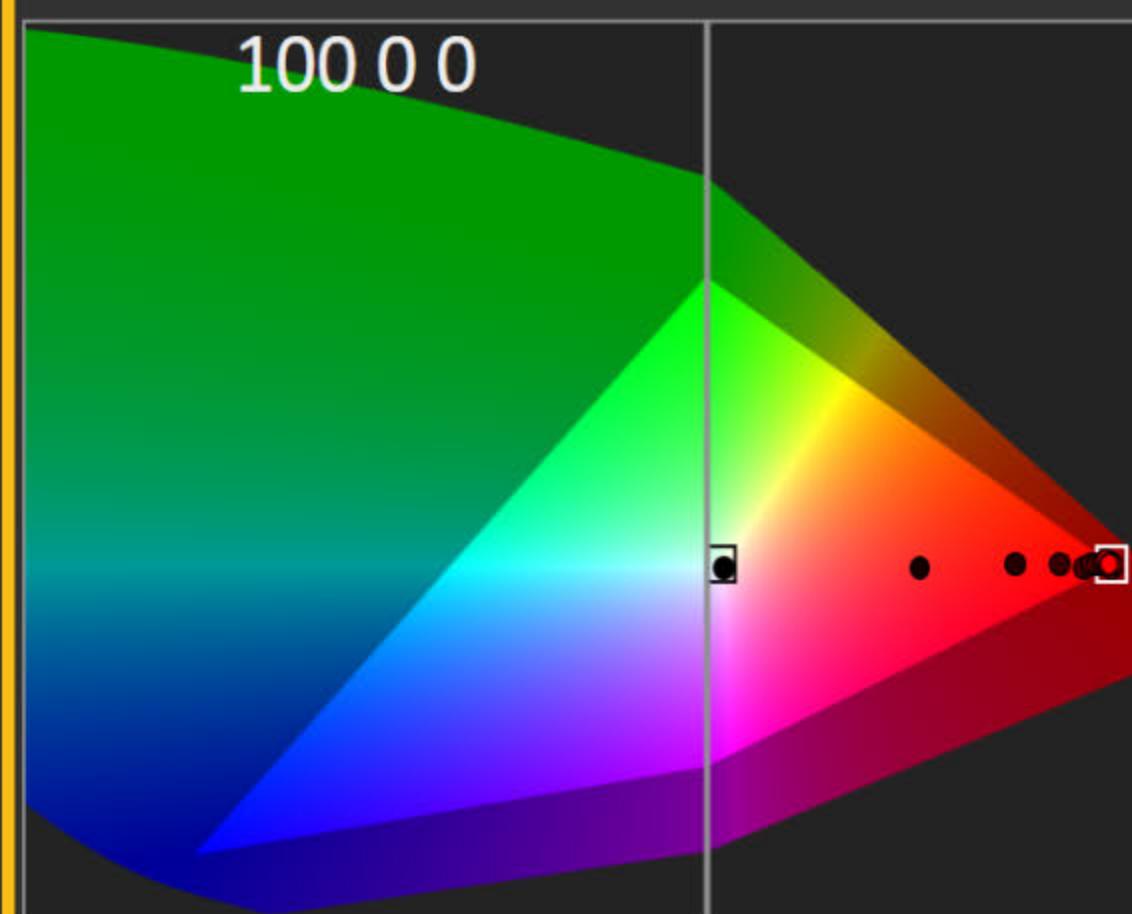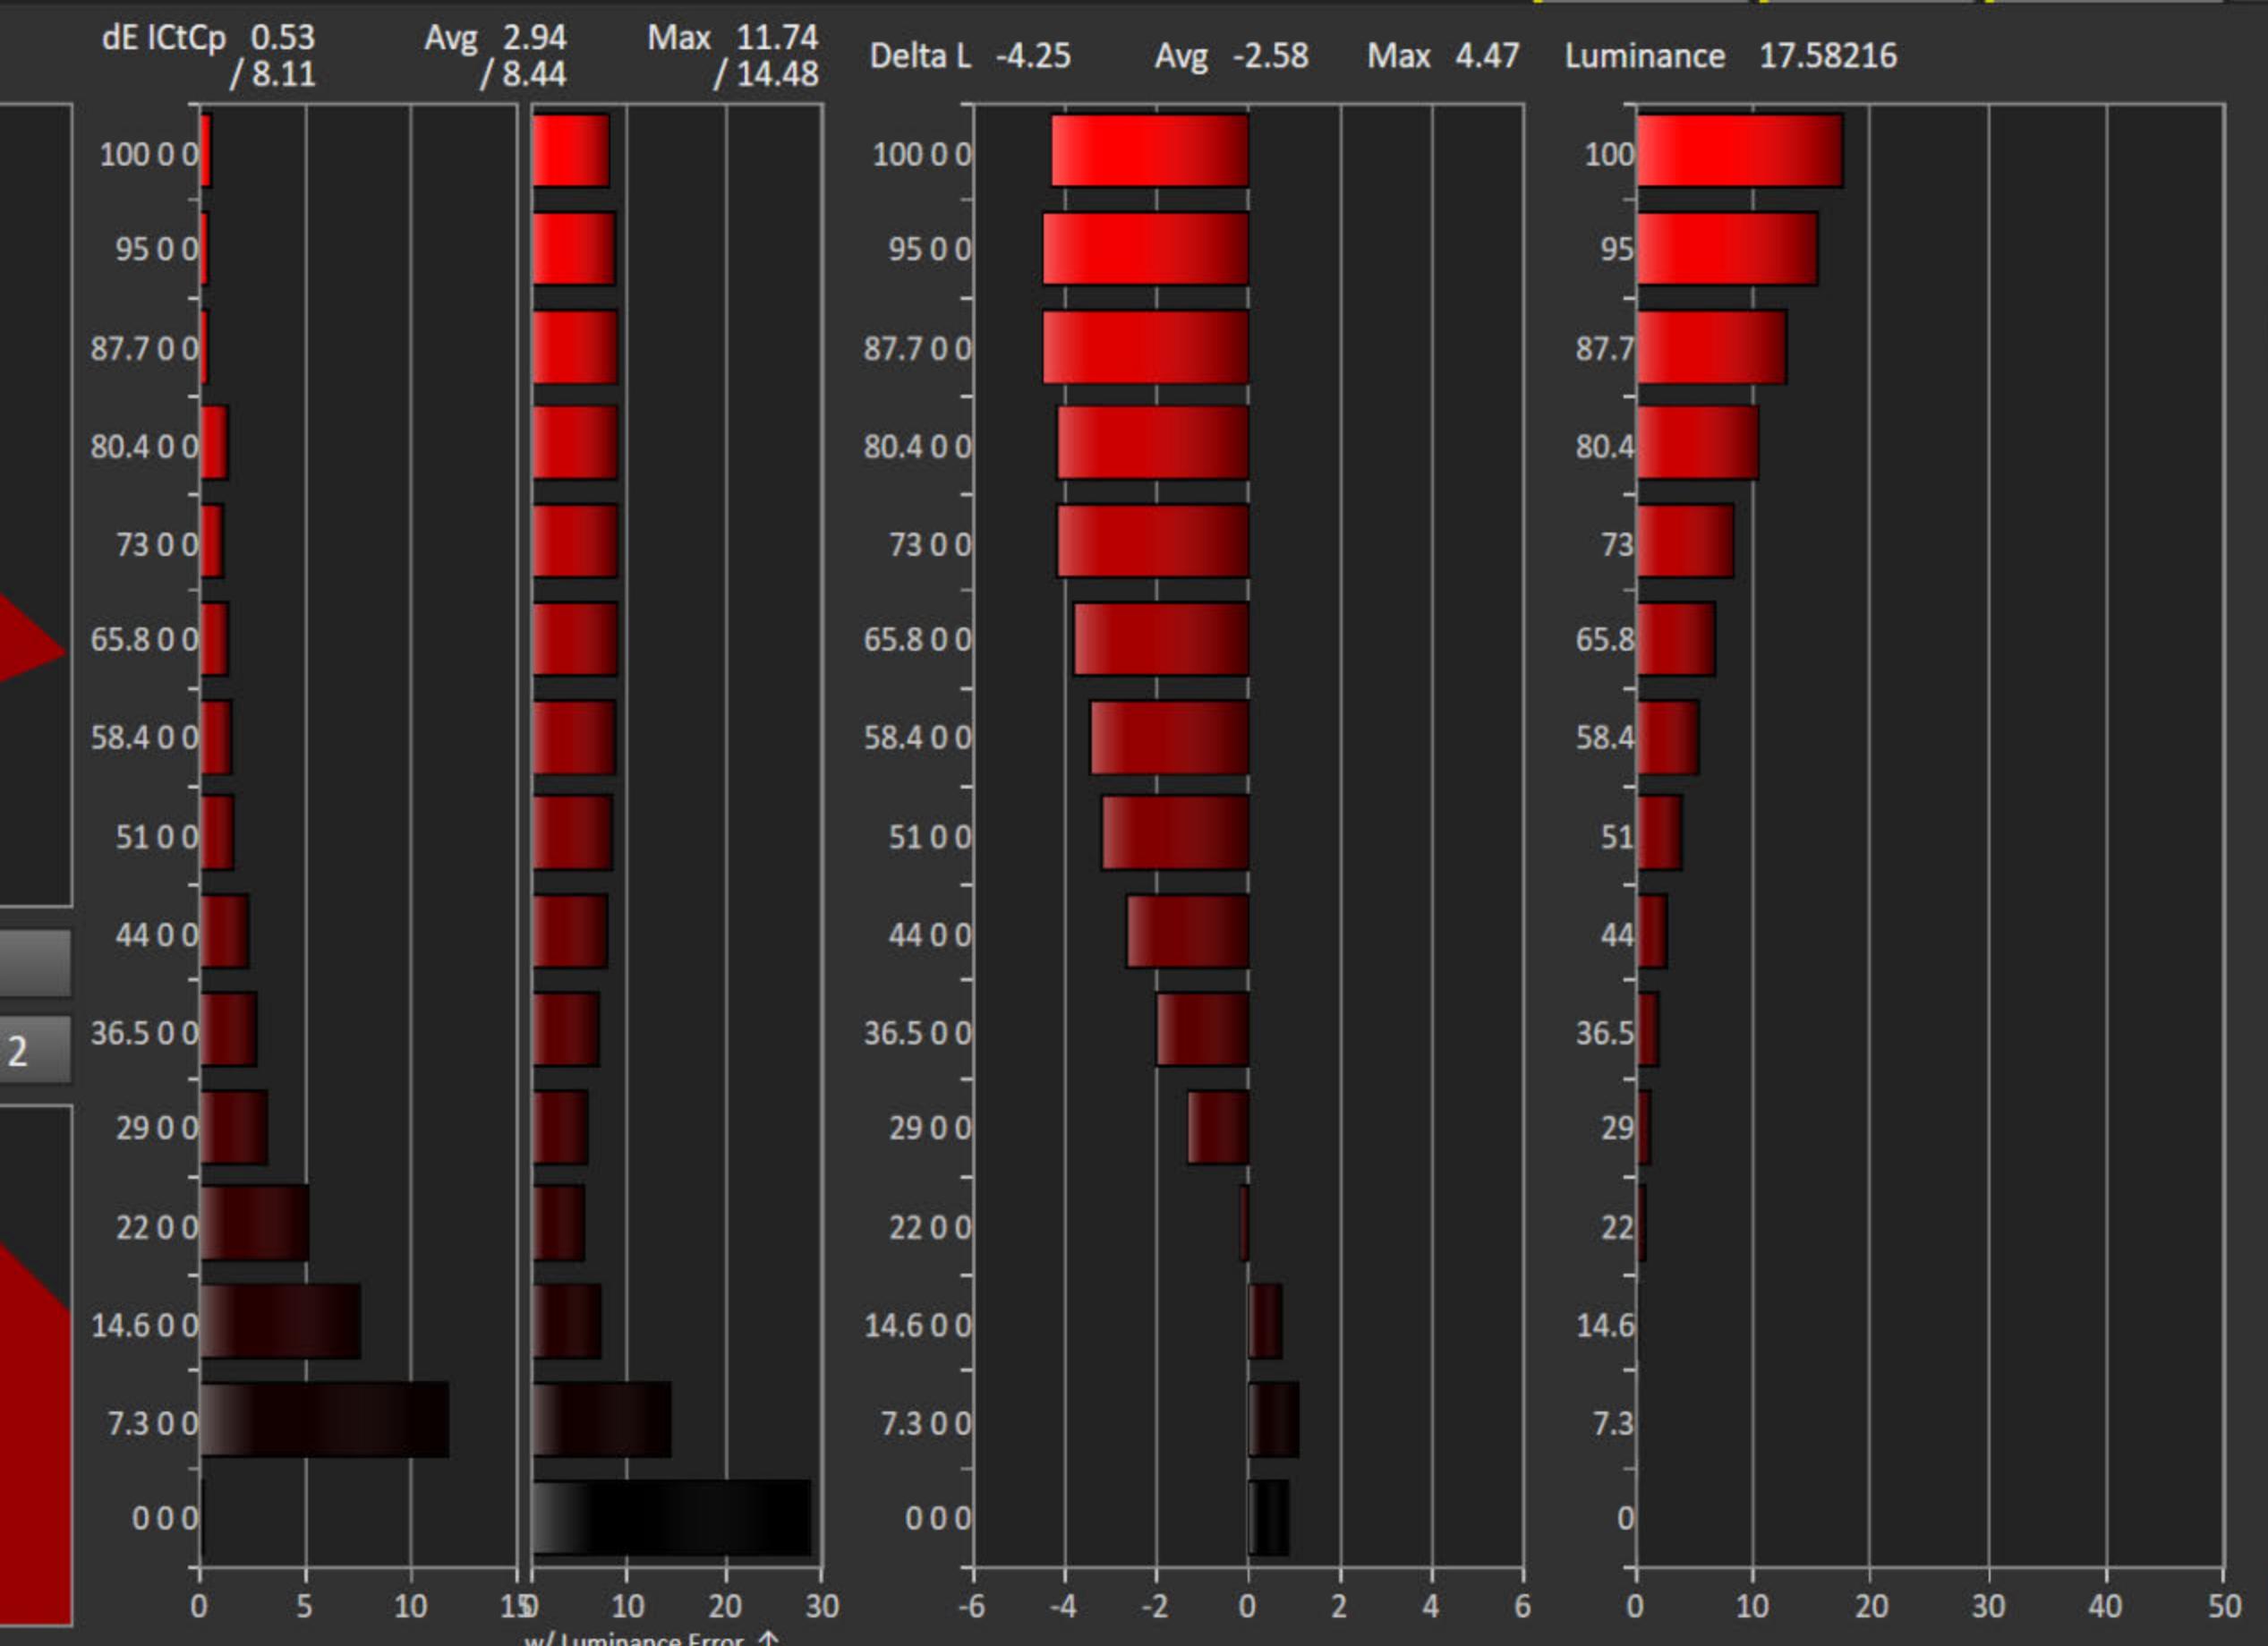


Red Green Blue White
Cyan Magenta Yellow

↑ Charts 2

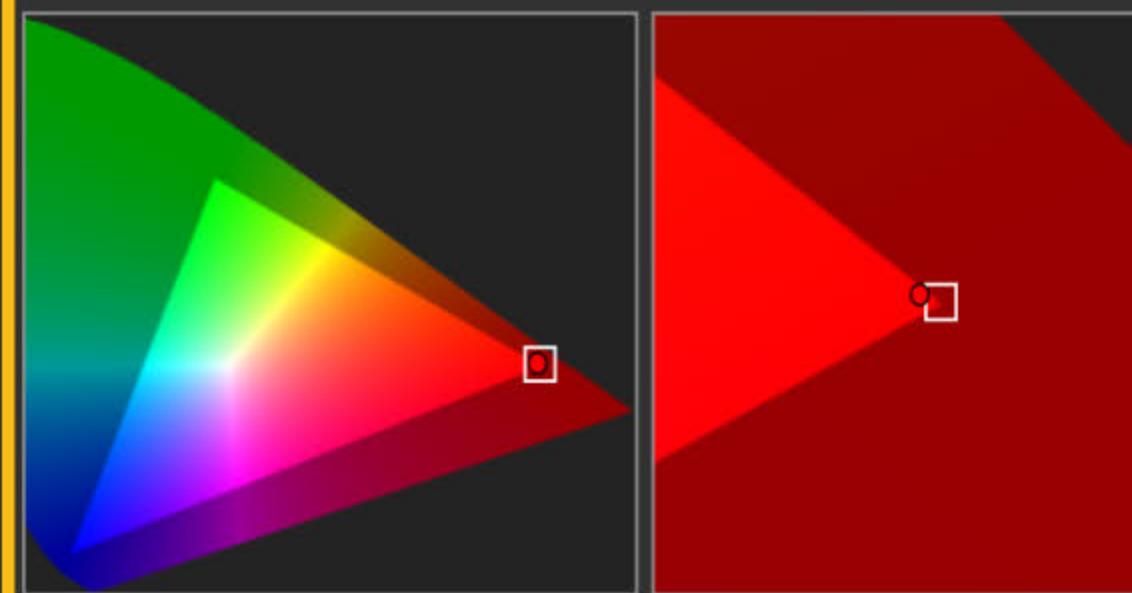

Datagrid ↗ Notes ↘
← Back Next →

ANL
3dLUT
Detail
Back
Next
Calib
HOME
Prepare
Session Setup
PreCal Read
Calibrate
↑ Calib
PostCal Read
Analyze
∫ Gry
∫ Sat
∫ Lum
∫ CCk
↑ Calib
↑ chrt2
Final Check
CAL
↑ Calib

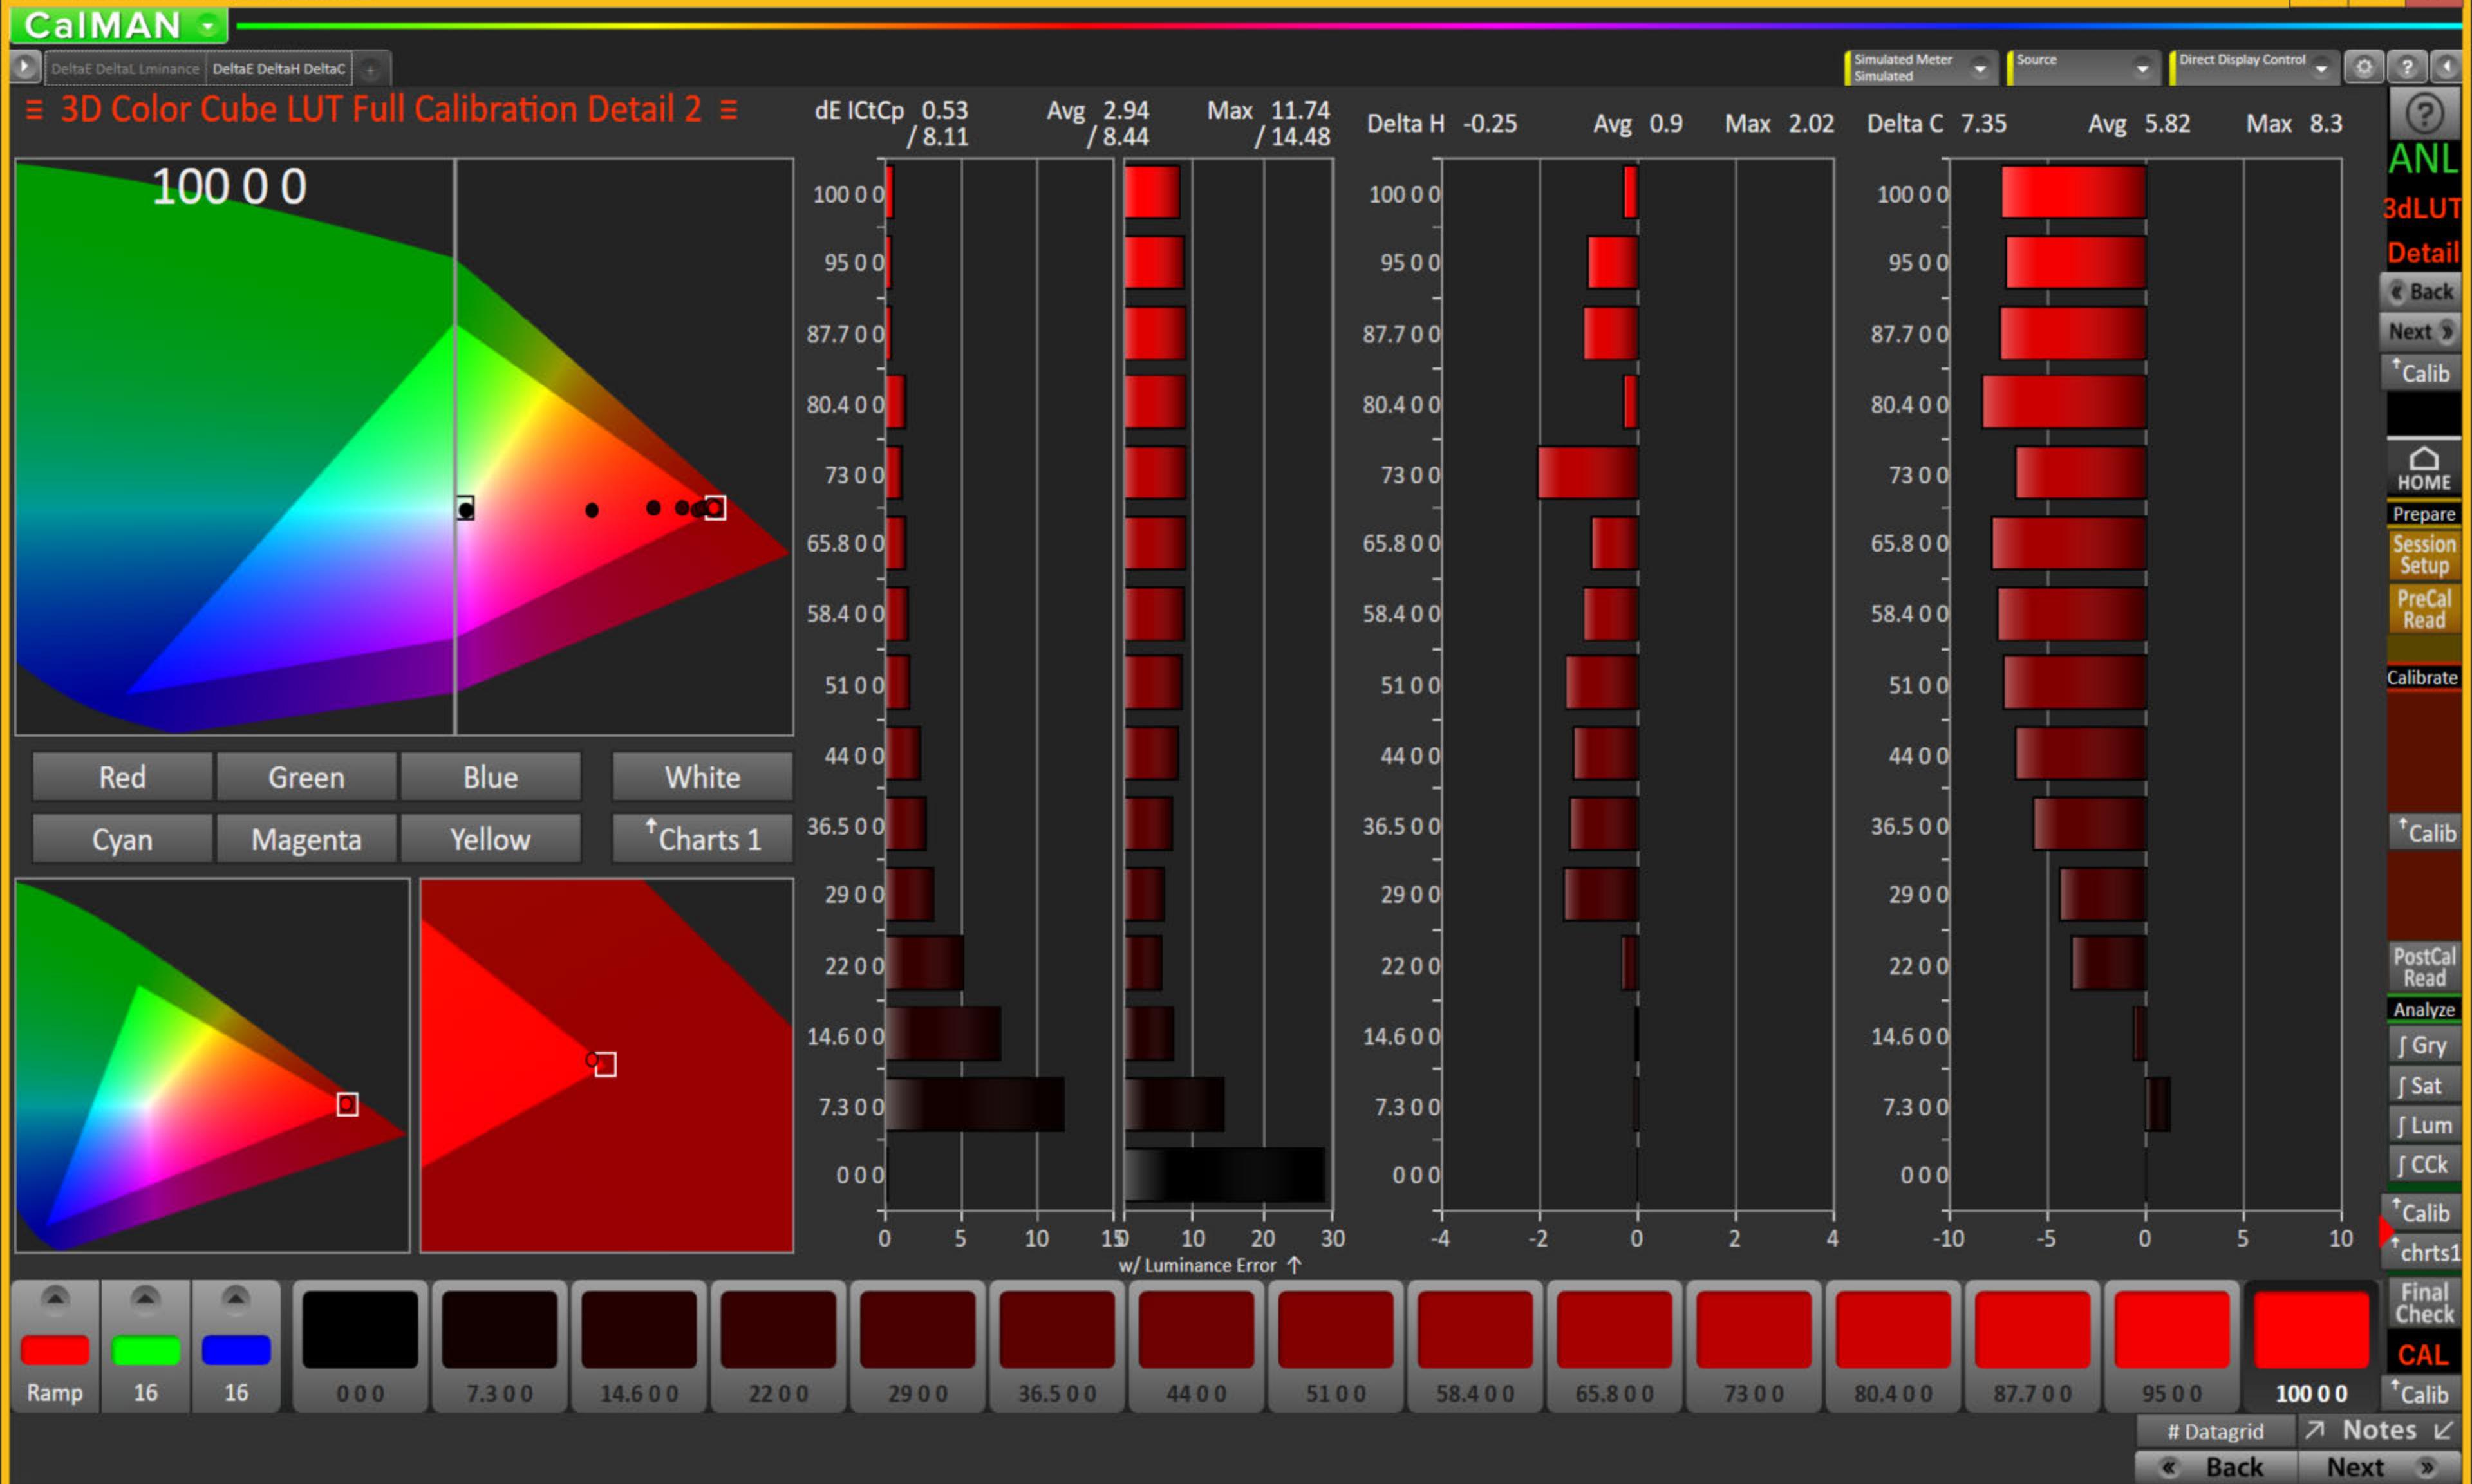


CaIMAN

Delta DeltaL Lminance DeltaE DeltaH DeltaC

Simulated Meter Source Direct Display Control

≡ 3D Color Cube LUT Minimal Calibration - Charts1 ≡ dE ICtCp 0.42 / 7.59 Avg 3.17 / 7.99 Max 12.96 / 17.07 Delta L -3.05 Avg -2 Max 4.36 Luminance 5.93696

x Comparator

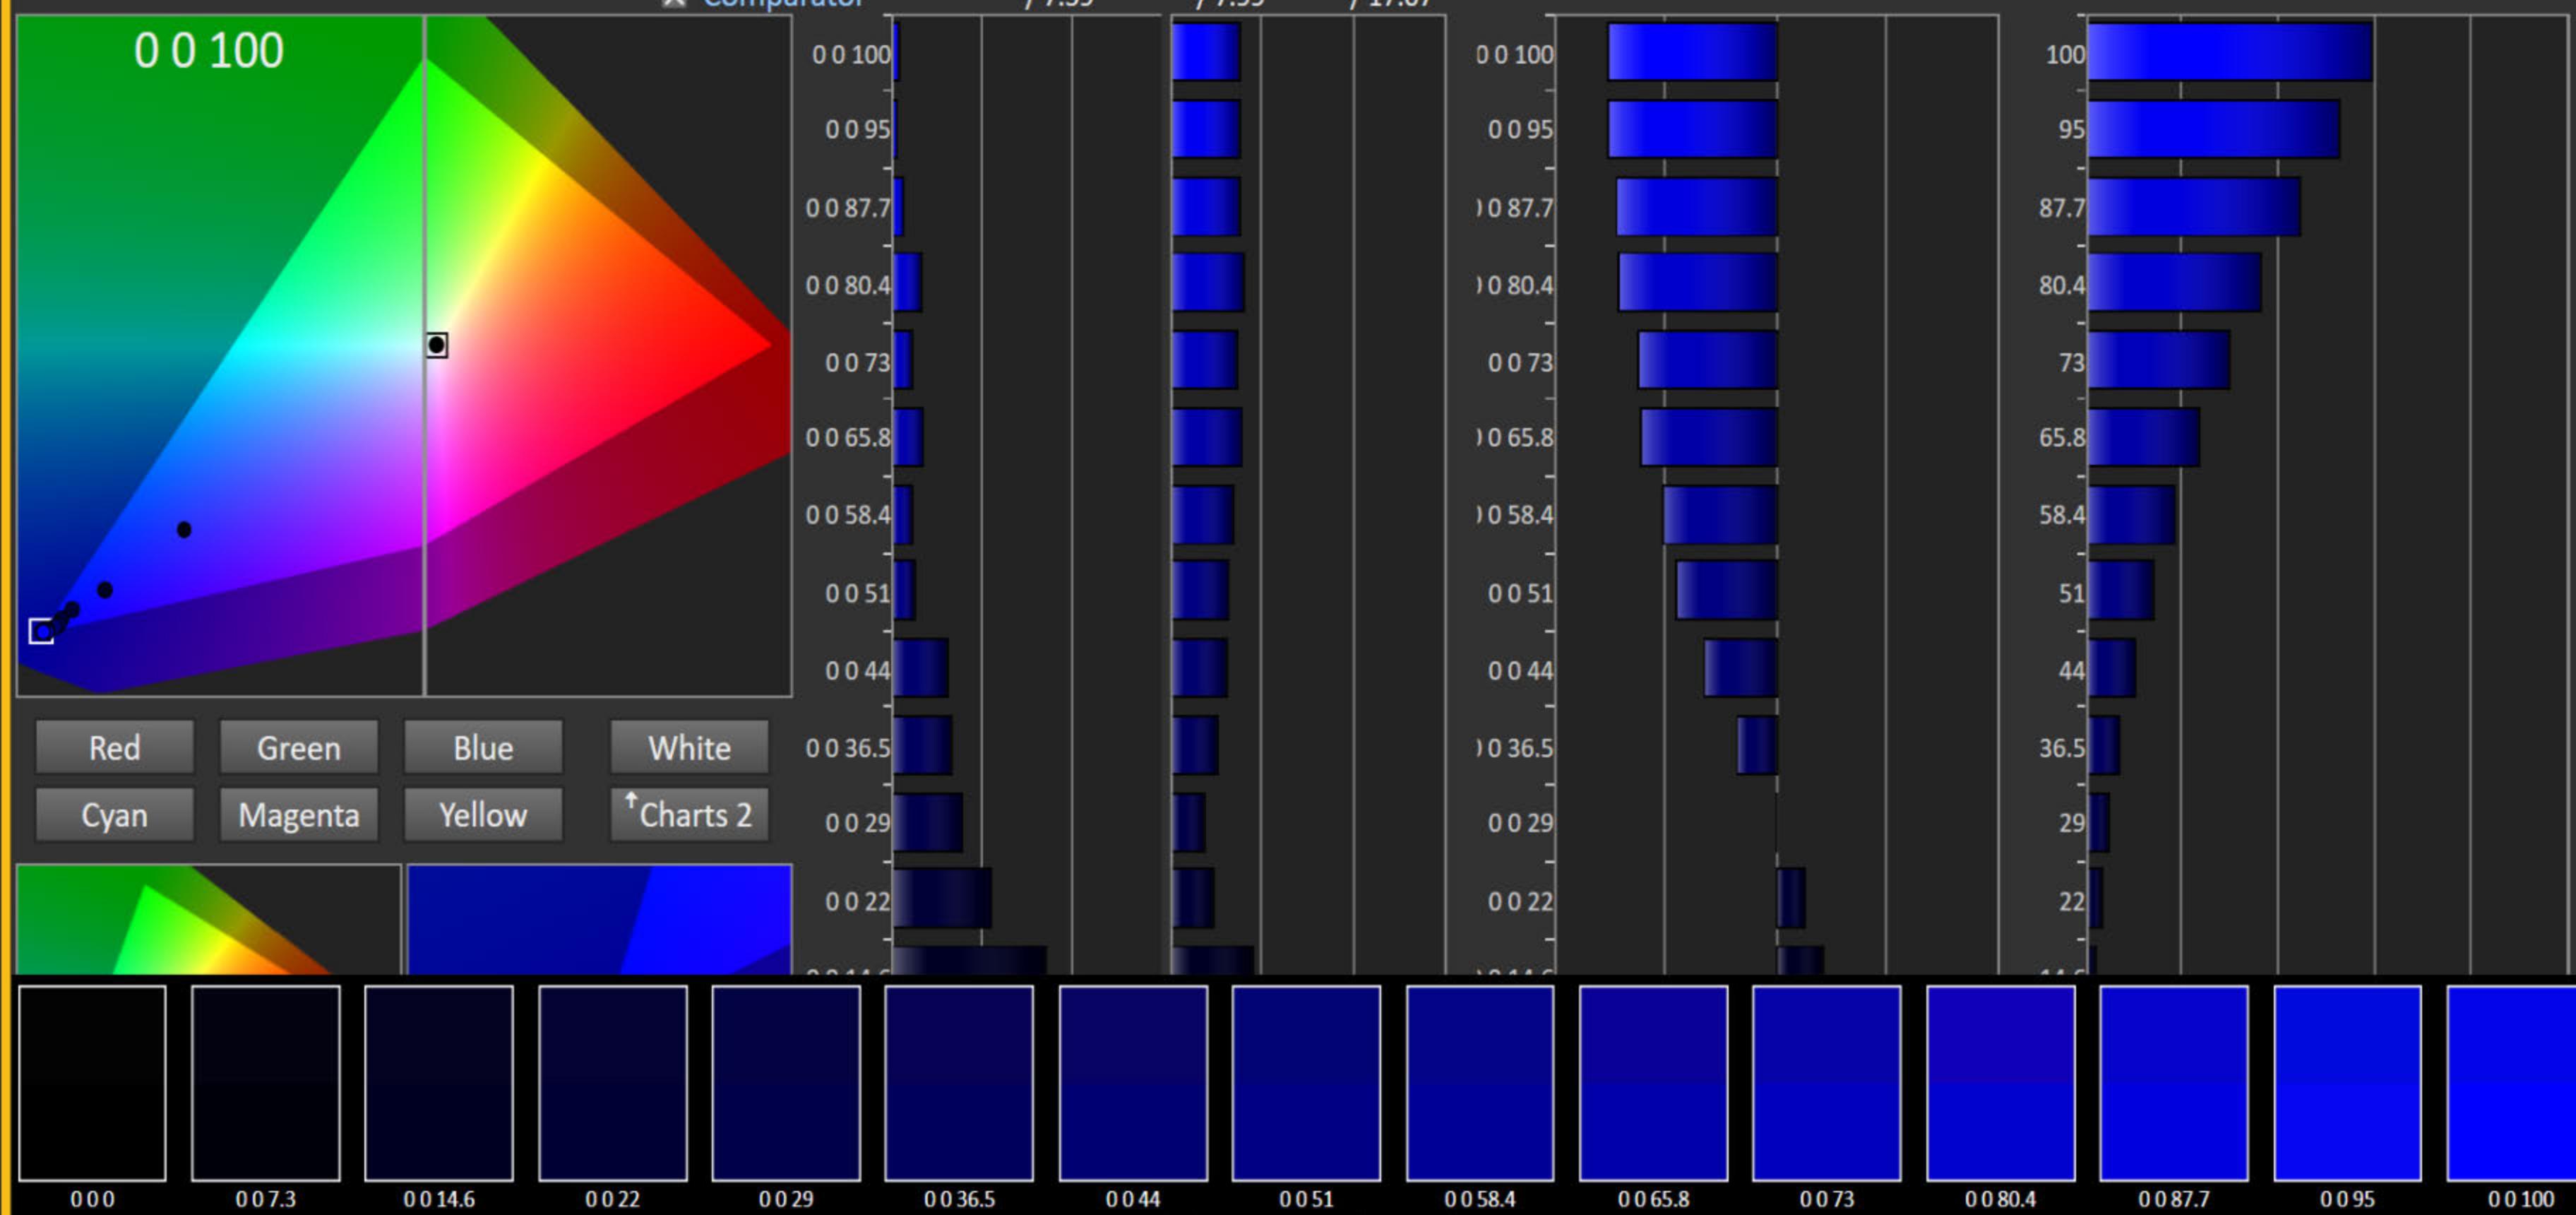

0 0 Ramp 000 007.3 0014.6 0022 0029 0036.5 0044 0051 0058.4 0065.8 0073 0080.4 0087.7 0095 00100


Datagrid Notes

Back Next

ANL
3dLUT
Detail
Back
Next
Calib
HOME
Prepare
Session Setup
PreCal Read
Calibrate
↑ Calib
PostCal Read
Analyze
↑ Calib
↑ chrt2
Final Check
CAL
↑ Calib

CalMAN

Final Check



Session Final Check ≡ 7/28/2018 Calibration

AV Mode - Cal Day 300 nits

Contrast Verification

Data Points: select Clipping or Clipping with Peak White:

Clipping with Peak White


- ① Adjust the Backlight, Brightness and Contrast controls to optimize the white level so it doesn't clip any of the primaries.

Gamma Level Verification

Data Points: select a full set of grayscale points, e.g. 11:

Clipping with Peak White


- ② Check / adjust the gamma level across the full grayscale. Use the Backlight, Brightness, Contrast and Gamma controls to make this adjustment.

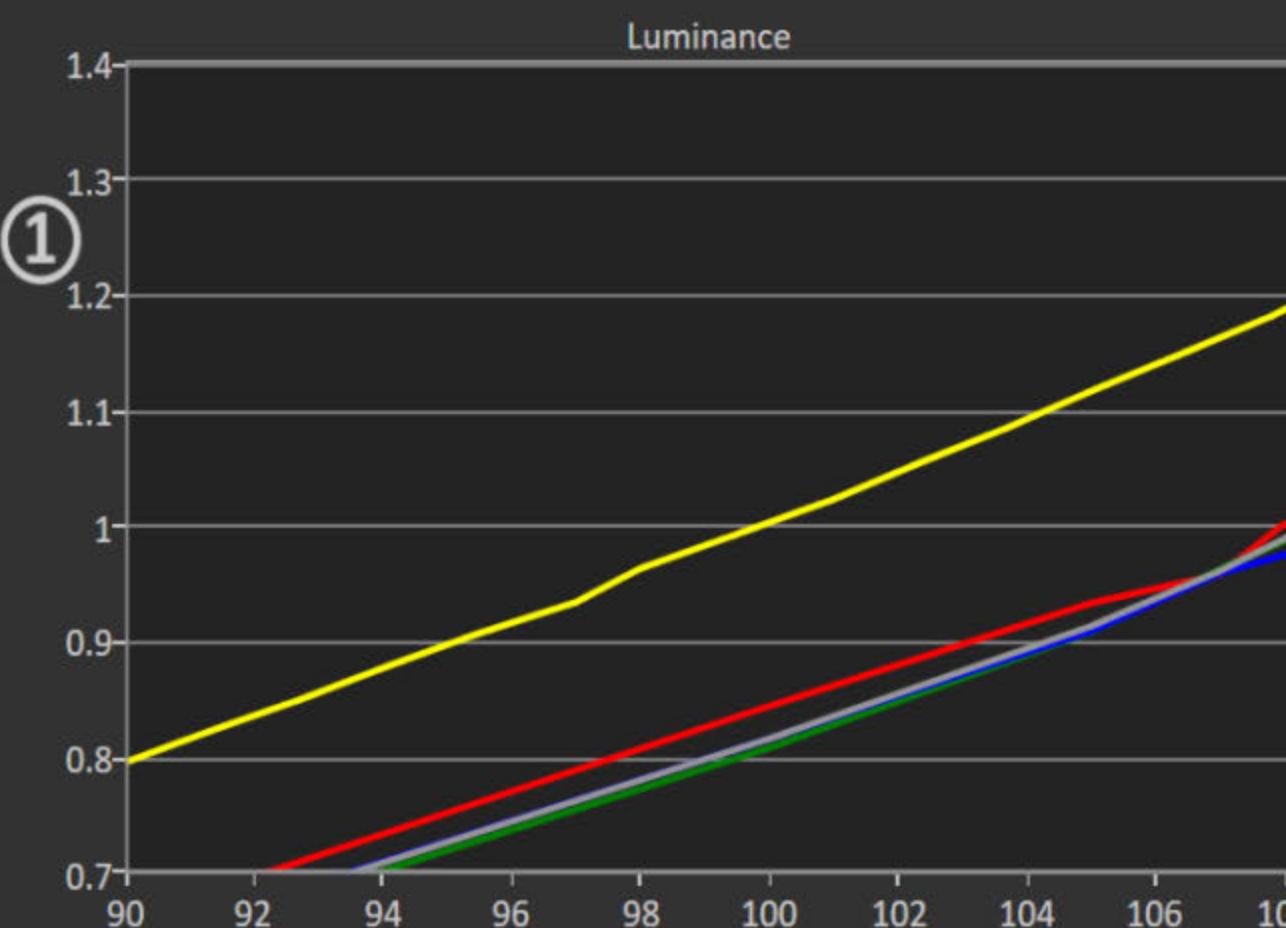

107
Gamma -0.64
27.96599 cd/m²

White 100 cd/m² Black 0 Cntr Ratio 0

Gamma Log/Log

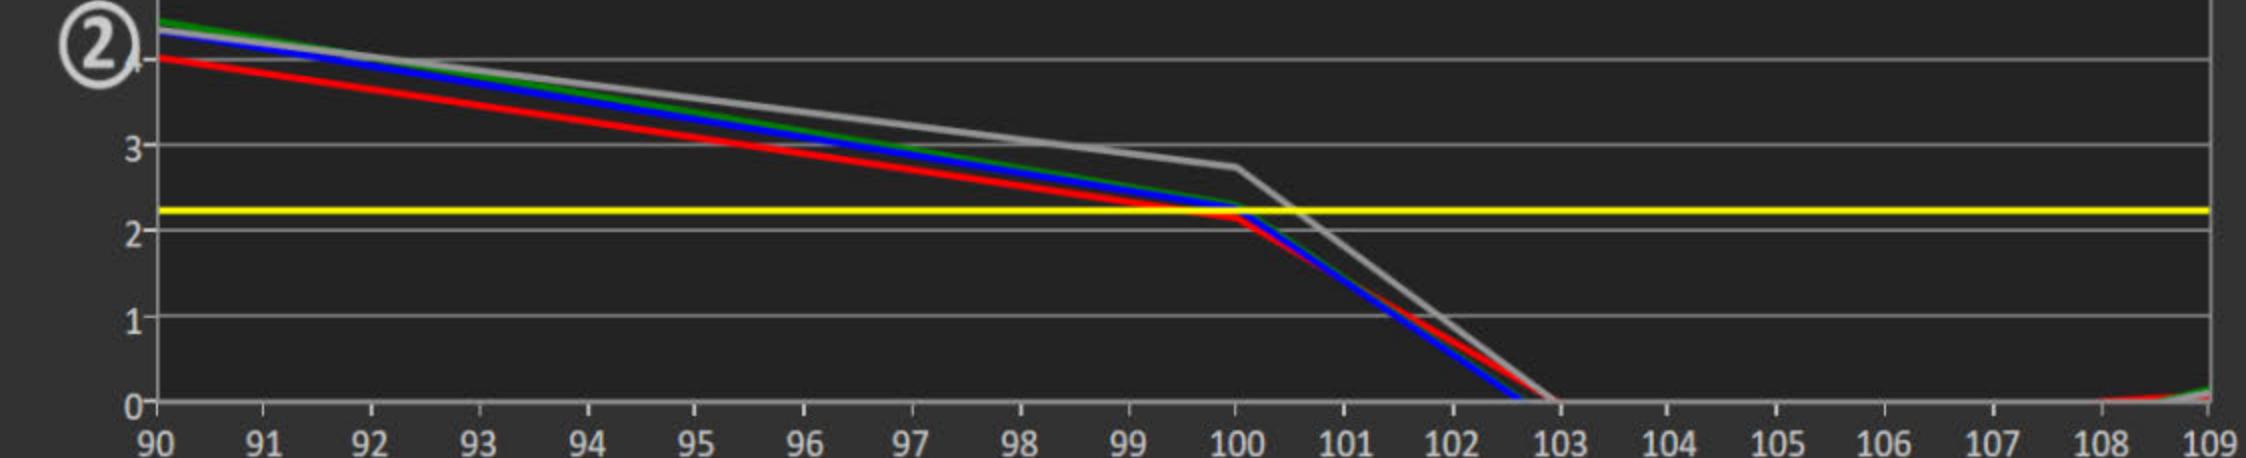

Post-Calibration Notes

↗ Notes ↘

Save ➞

Contrast

TV Gamma

Red

Green

Brightness

Color

Gain

Blue

Backlight

Tint

Cut

Post-Calibration Summary

Grayscale dE Avg 0
Max 0

Saturation dE Avg 0
Max 0

Luminance dE Avg 0
Max 0

Color Checker dE Avg 0
Max 0

Color Cube LUT dE Avg 8.44 Full
Use Minimal layout data Max 14.48

LUT values come from calibration Full layout, or Minimal layout if checked

Gamma Target 2.2
Total 2.2

CCT Target 6503
Avg 0

ANL
Final
Check

Back

HOME
Prepare
Session Setup
PreCal Read
Calibrate
↓ Gry
↓ CMS
↓ Sat
↓ LUT
↓ Lum
↓ CCk
PostCal Read
Analyze
↓ Gry
↓ Sat
↓ Lum
↓ CCk
↓ LUT

Final Check
Final

CaIMAN

Grayscale Datagrids

 Simulated Meter
Simulated
Source
Direct Display Control
⚙️ ? ANL

≡ Pre-Cal Multi-Point Grayscale Data ≡

Pre-Cal

	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	ANL
RGB Triplet	16, 16, 16	27, 27, 27	38, 38, 38	49, 49, 49	60, 60, 60	71, 71, 71	82, 82, 82	93, 93, 93	104, 104, 104	115, 115, 115	126, 126, 126	136, 136, 136	147, 147, 147	158, 158, 158	169, 169, 169	180, 180, 180	191, 191, 191	202, 202, 202	213, 2	
Target Y cd/m²	0.0001	0.1497	0.6611	1.5914	2.9765	4.8433	7.2137	10.1064	13.5377	17.5222	22.0729	26.7115	32.3759	38.6392	45.5110	53.0005	61.1162	69.8665	79.25	
Y cd/m²	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Target x:CIE31	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	
x: CIE31	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Target y:CIE31	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	
y: CIE31	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	
Target CCT	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	
CCT	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	

≡ Post-Cal Multi-Point Grayscale Data ≡

Post-Cal

	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
RGB Triplet	16, 16, 16	27, 27, 27	38, 38, 38	49, 49, 49	60, 60, 60	71, 71, 71	82, 82, 82	93, 93, 93	104, 104, 104	115, 115, 115	126, 126, 126	136, 136, 136	147, 147, 147	158, 158, 158	169, 169, 169	180, 180, 180	191, 191, 191	202, 202, 202	213, 2	
Target Y cd/m²	0.0001	0.1497	0.6611	1.5914	2.9765	4.8433	7.2137	10.1064	13.5377	17.5222	22.0729	26.7115	32.3759	38.6392	45.5110	53.0005	61.1162	69.8665	79.25	
Y cd/m²	0.0995	0.3629	0.8548	1.6328	2.6905	4.0828	5.8819	8.0148	10.5787	13.6639	17.0725	20.9271	25.1011	30.3738	36.0370	42.0427	48.2878	56.0356	63.58	
Target x:CIE31	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	0.3127	
x: CIE31	0.3129	0.3143	0.3140	0.3110	0.3101	0.3150	0.3137	0.3126	0.3137	0.3136	0.3154	0.3121	0.3147	0.3100	0.3092	0.3126	0.3121	0.3124	0.313	
Target y:CIE31	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	0.3290	
y: CIE31	0.3300	0.3287	0.3265	0.3301	0.3297	0.3283	0.3300	0.3297	0.3273	0.3304	0.3281	0.3316	0.3270	0.3309	0.3305	0.3299	0.3289	0.3295	0.328	
Target CCT	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.4440	6503.	
CCT	6484.0000	6420.0000	6449.0000	6591.0000	6644.0000	6384.0000	6441.0000	6504.0000	6459.0000	6446.0000	6364.0000	6517.0000	6409.0000	6639.0000	6683.0000	6501.0000	6540.0000	6518.0000	6458.	

Click Change Selection then right-click on either datagrid chart (ESCape the context menu) to show possible selections

Change Selection ×

Notes

ʃ Pre-Cal ⚡ Post-Cal

◀ Back ▶ Next

DTA

Final Check

Calibrate

HOME

PreCal Read

Datagrid

Gry

Sat

Lum

CCk

CalMAN

Saturation Datagrids

≡ Pre-Cal Saturation Sweeps Data

	25%	50%	75%	100%
RGB Triplet	180, 123, 123	180, 90, 90	180, 64, 64	180,
Target x:CIE31	0.3937	0.4764	0.5563	0.64
x: CIE31	0.0000	0.0000	0.0000	0.00
Target y:CIE31	0.3293	0.3295	0.3297	0.33
y: CIE31	0.0000	0.0000	0.0000	0.00
Target Y	27.6279	18.5654	14.1040	11.2
Y	0.0000	0.0000	0.0000	0.00
Gamma Point: Flat	0.0000	0.0000	0.0000	0.00
ΔE 2000	0.0000	0.0000	0.0000	0.00
dE2000 LuminanceCompensated	0.0000	0.0000	0.0000	0.00
ΔE 1994 L*:±	0.0000	0.0000	0.0000	0.00
ΔE 1994 Sat:±	0.0000	0.0000	0.0000	0.00
ΔE 1994 Hue:±	0.0000	0.0000	0.0000	0.00
Signed dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.00
Signed dE94 C LuminanceCompensated	0.0000	0.0000	0.0000	0.00
Signed dE94 H LuminanceCompensated	0.0000	0.0000	0.0000	0.00

≡ Post-Cal Saturation Sweeps Data ≡

	25%	50%	75%	100%
RGB Triplet	126, 86, 86	147, 75, 75	165, 60, 60	180, 16, 16
Target x:CIE31	0.3991	0.4767	0.5549	0.6400
x: CIE31	0.3934	0.4711	0.5430	0.6354
Target y:CIE31	0.3293	0.3295	0.3297	0.3300
y: CIE31	0.3300	0.3286	0.3301	0.3311
Target Y	11.1535	11.3303	11.4753	11.2709
Y	8.8760	9.0665	9.2385	8.9706
Gamma Point: Flat	3.5302	4.6921	6.2182	8.3958
ΔE 2000	3.9044	3.7531	3.9337	3.9140
dE2000 LuminanceCompensated	0.8394	0.5055	0.9007	0.4218
ΔE 1994 L*:±	-4.0935	-4.0192	-3.9301	-4.1055
ΔE 1994 Sat:±	-2.9961	-3.9724	-6.9381	-7.8976
ΔE 1994 Hue:±	0.1326	-0.4761	-0.6553	-0.5088
Signed dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.0000
Signed dE94 C LuminanceCompensated	-1.3819	-1.0686	-2.7921	-1.6211
Signed dE94 H LuminanceCompensated	0.1277	-0.4587	-0.6321	-0.3985

Pre-C

Click Change Selection then right-click on either datagrid or chart (ESCAPE the context menu) to show possible selections

Post-Cal

25%

50%

75%

100%

Change Selection

25%

50%

75%

100%

DTA
Notes

Pre-Cal Post-Cal
« Back Next »

CaIMAN

Color Check Datagrids + Simulated Meter Simulated Source Direct Display Control ?

Pre-Cal Color Checker Data

	White	Gray 80	Gray 65	Gray 50	Gray 35	Dark Skin	Light Skin	Blue Sky	Foliage	Blue Flower	Bluish Green	Orange	Purplish Blue	Moderate Red	Purple	Yellow Gre
RGB Triplet	235, 235, 235	213, 213, 213	196, 196, 196	176, 176, 176	152, 152, 152	115, 86, 73	182, 145, 128	97, 121, 150	93, 108, 73	128, 126, 167	101, 178, 161	202, 119, 51	80, 95, 156	182, 88, 99	95, 69, 108	152, 176,
Target x:CIE31	0.3127	0.3127	0.3127	0.3127	0.3127	0.4057	0.3778	0.2491	0.3415	0.2687	0.2615	0.5141	0.2150	0.4635	0.2884	0.3773
x: CIE31	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Target y:CIE31	0.3290	0.3290	0.3290	0.3290	0.3290	0.3643	0.3561	0.2656	0.4314	0.2530	0.3593	0.4095	0.1896	0.3123	0.2170	0.4951
y: CIE31	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Target Y	100.0000	79.2590	65.0145	50.2050	35.1480	9.9716	35.6179	19.1127	13.1987	23.8604	42.4852	28.6553	11.7829	18.6747	6.5450	43.7286
Y	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Gamma Point: Flat	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ΔE 2000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
dE2000 LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ΔE 1994 L*:±	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ΔE 1994 Sat:±	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ΔE 1994 Hue:±	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Signed dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Post-Cal Color Checker Data

	White	Gray 80	Gray 65	Gray 50	Gray 35	Dark Skin	Light Skin	Blue Sky	Foliage	Blue Flower	Bluish Green	Orange	Purplish Blue	Moderate Red	Purple	Yellow Gre
RGB Triplet	235, 235, 235	213, 213, 213	196, 196, 196	176, 176, 176	152, 152, 152	115, 86, 73	182, 145, 128	97, 121, 150	93, 108, 73	128, 126, 167	101, 178, 161	202, 119, 51	80, 95, 156	182, 88, 99	95, 69, 108	152, 176,
Target x:CIE31	0.3127	0.3127	0.3127	0.3127	0.3127	0.4057	0.3778	0.2491	0.3415	0.2687	0.2615	0.5141	0.2150	0.4635	0.2884	0.3773
x: CIE31	0.3139	0.3134	0.3123	0.3120	0.3151	0.4025	0.3814	0.2508	0.3384	0.2670	0.2610	0.5141	0.2164	0.4650	0.2896	0.3723
Target y:CIE31	0.3290	0.3290	0.3290	0.3290	0.3290	0.3643	0.3561	0.2656	0.4314	0.2530	0.3593	0.4095	0.1896	0.3123	0.2170	0.4951
y: CIE31	0.3282	0.3269	0.3278	0.3281	0.3267	0.3615	0.3550	0.2662	0.4245	0.2531	0.3579	0.4049	0.1911	0.3105	0.2214	0.4960
Target Y	100.0000	79.2590	65.0145	50.2050	35.1480	9.9716	35.6179	19.1127	13.1987	23.8604	42.4852	28.6553	11.7829	18.6747	6.5450	43.7286
Y	81.4120	63.5920	51.4250	39.3078	27.2482	7.9312	27.8845	15.0129	10.3310	18.7117	33.1915	22.7612	9.3286	14.7228	5.3292	34.5857
Gamma Point: Flat	2.7023	4.3221	3.4097	2.9860	2.7378	3.2036	4.6356	3.8760	2.6261	4.5300	3.6755	9.1609	5.3273	6.9613	3.3933	3.3970
ΔE 2000	4.7665	5.2138	5.2253	5.4332	6.0900	3.5089	5.5155	5.2371	4.4645	5.5972	5.6067	5.4869	3.9182	5.0723	2.8345	5.4539
dE2000 LuminanceCompensated	1.4206	1.8543	0.6104	0.3763	2.2516	0.5576	1.1445	0.4154	0.7707	0.6543	0.2953	1.2193	0.2125	0.3800	0.6510	0.9850
ΔE 1994 L*:±	-7.6853	-7.5985	-7.5555	-7.2213	-6.6604	-3.9521	-6.4427	-5.1670	-4.6311	-5.5996	-6.8884	-5.6507	-4.2595	-5.0523	-3.0952	-6.6219
ΔE 1994 Sat:±	0.9800	1.3610	0.5186	0.3676	1.5963	-2.0930	-0.5737	-2.0131	-3.5686	-2.2937	-2.7438	-5.6945	-3.8803	-2.8781	-3.6724	-4.8972
ΔE 1994 Hue:±	0.0000	0.0000	0.0000	0.0000	0.0000	-0.5205	-0.9799	0.3763	0.4313	-0.7036	0.4289	-1.9552	0.0727	-0.4794	-0.0374	1.9343
Signed dE94 L LuminanceCompensated	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Click Change Selection then right-click on either datagrid chart (ESCape the context menu) to show possible selections

Change Selection ×

ANL

PreCal

HOME

Prepare

PreCal Read

Calibrate

CCK

PostCal Read

Datagrid

Gry

Sat

Lum

Final Check

DTA

Notes

Pre-Cal Post-Cal

Back Next